





由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

由Autodesk教育版产品制作

MAPX	MODIFICATION	DATE

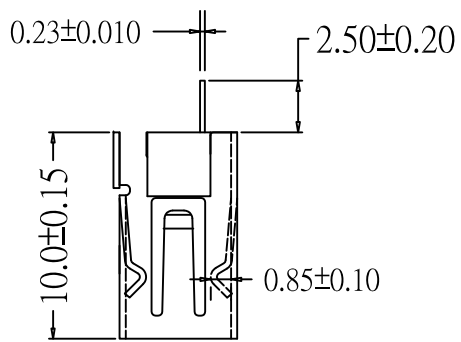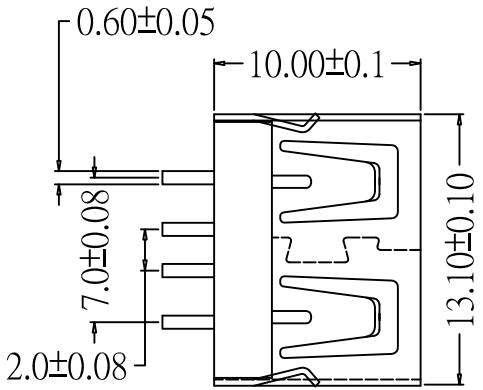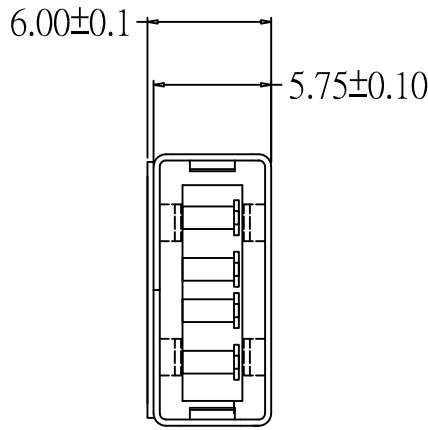

规格说明:Specifications:

电气特性:Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗:Contact Resistance
30 milliohms MAX
- 4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
- 5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
- 2. 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Matorial:

- 1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
- 2. 端子:Contact:Copper Alloy C2680
- 3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U"镀金1U"
- 2. 外壳:Shell:
铜壳四周镀80U" (MIN) 锡
Nickel Plating

产品图				深圳市精拓金电子有限公司							
PRODUCT CHART DWG											
公差一览表				单位	MM	制图		制图料号	908-751A1019Y10200		
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.			
X.	±0.15	X.	±5.°	比例	1:1	审核	郭治富	产品名称	AF10.0A款180度无脚无边铁壳		
.X	±0.10	.X	±2.°	SCALE		CHD		PRODUCT_NO.	一型6.0PBT白胶		
.XX	±0.05	.XX	±1.°	日期	2016-09-09	核准	黄国荣	角法	⊗	版本	A0
.XXX	±0.03	.XXX	±0.5°	DATE		APPD		VIEW	⊙	VER	