




[+ HARNESSING](#)  
[HEAT SHRINK BOOTS](#)

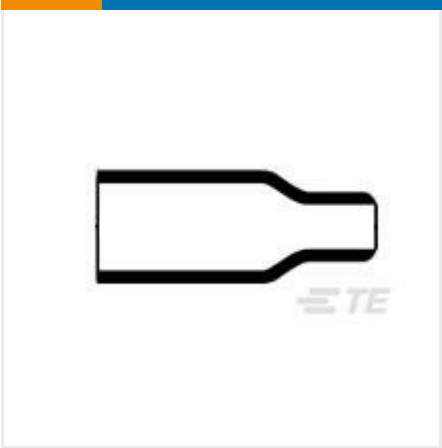

✓ Active

TE CONNECTIVITY (TE)  
**202A111-3/42-0**  
[Raychem](#) | [CAP](#) , [CRPS](#)

202A111-3/42-0  
TE Internal Number: 814777-000  
Alias ID: 1196348-6

[EU RoHS Compliant](#)  
[EU ELV Compliant](#)

**Lipped** No

**Operating Temperature Range (°C)** -20 – 60

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** /42 Precoat, -20 – 60°C (-4 – 140°F)

**Material Systems Code** 10

[↓](#) **PRODUCT DRAWING**  
English

DOCUMENTATION

Product Drawings

**Boot, Straight, Overexpanded**

PDF

English

FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

**Molded Part Type** Micro Boot, Molded Boot

Configuration Features

Lipped No

Body Features

Material Systems Code 10

Adhesive Pre-Coat Yes

Material Modified Polyolefin

Dimensions

Cable Diameter Range 3.8 – 11.9 mm [ .1496 – .469 in ]

Wire/Cable Outside Diameter .177 in, .18 in, .2 in, .236 in, 5 mm, 6 mm

Usage Conditions

Operating Temperature Range (°C) -20 – 60

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /42 Precoat, -20 – 60°C (-4 – 140°F)

Adhesive Type General Purpose Pre-Coat Adhesive

Statement of Compliance

Statement of Compliance

PDF