1-1717834-3 ACTIVE

Dynamic Series | Dynamic 2000 Series

TE Internal #: 1-1717834-3

Housing, Receptacle, Wire-to-Board / Wire-to-Wire, 6 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Black, Mating Retention,

Dynamic 2000 Series

View on TE.com >



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings > Receptacle and Tab Housing: 2.5 mm Pitch, 250V











Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board, Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 2.5 mm [.098 in]

All Receptacle and Tab Housing: 2.5 mm Pitch, 250V (54)

Features

Product Type Features

| | using |
|--|--------------------------|
| Connector & Housing Type Rece | ceptacle |
| Connector System Wire | e-to-Board, Wire-to-Wire |
| Sealable | |
| Connector & Contact Terminates To Wire | re & Cable |

Configuration Features

| Number of Positions | 6 |
|---------------------|---|
| Number of Rows | 2 |

Body Features

| Primary Product Color | Black |
|-----------------------|---|
| | _ · · · · · · · · · · · · · · · · · · · |

Contact Features



| Contact Type Receptacle Contact Base Material Copper Alloy Contact Current Rating (Max) 5 A Termination Features Termination Method to Wire & Cable Crimp Mechanical Attachment Strain Relief Without Mating Retention With Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mml.098 in] Dimensions Connector Length 8.9 mml.35 in] Connector Height 12.98 mml.51 in] Connector Width 20 mml.78 in] Row-to-Row Spacing 3.75 mml.147 in] Usage Conditions Operating Temperature Range 55 105 °C 67 - 221 °F Operation/Application Circuit Application UL Flammability Rating UL 94V-0 | | |
|--|------------------------------------|----------------------------|
| Contact Current Rating (Max) Termination Features Termination Method to Wire & Cable Mechanical Attachment Strain Relief Without Mating Retention Connector Mounting Type Cable Mount (Free Hanging) Housing Features Housing Material Centerline (Pitch) Dimensions Connector Length Connector Height 12.98 mm[.35 in] Connector Width Row to Row Spacing Usage Conditions Operating Temperature Range Circuit Application Circuit Application Signal Industry Standards | Contact Type | Receptacle |
| Termination Features Termination Method to Wire & Cable Mechanical Attachment Strain Relief Mithout Mating Retention With Connector Mounting Type Cable Mount (Free Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Contact Base Material | Copper Alloy |
| Termination Method to Wire & Cable Mechanical Attachment Strain Relief Without Mating Retention With Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Contact Current Rating (Max) | 5 A |
| Mechanical Attachment Strain Relief Without Mating Retention With Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range 55 – 105 °C[67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Termination Features | |
| Strain Relief Without Mating Retention With Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Termination Method to Wire & Cable | Crimp |
| Mating Retention Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Centerline (Pitch) Dimensions Connector Length Connector Height Connector Width Row-to-Row Spacing Operating Temperature Range Coperation/Application Circuit Application Mith With Cable Mount (Free-Hanging) Thermoplastic GF 2.5 mm[.098 in] 8.9 mm[.35 in] 2.98 mm[.51 in] 2.98 mm[.51 in] Confector Width 20 mm[.78 in] Signal Industry Standards | Mechanical Attachment | |
| Connector Mounting Type Cable Mount (Free-Hanging) Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Strain Relief | Without |
| Housing Features Housing Material Thermoplastic GF Centerline (Pitch) 2.5 mm[.098 in] Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Mating Retention | With |
| Housing Material Centerline (Pitch) Dimensions Connector Length Connector Height Connector Width Row-to-Row Spacing Usage Conditions Operating Temperature Range Circuit Application Industry Standards Thermoplastic GF 2.5 mm[.098 in] 8.9 mm[.35 in] 12.98 mm[.51 in] 12.98 mm[.51 in] 3.75 mm[.147 in] Usage Conditions Signal | Connector Mounting Type | Cable Mount (Free-Hanging) |
| Centerline (Pitch) Dimensions Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal | Housing Features | |
| DimensionsConnector Length8.9 mm[.35 in]Connector Height12.98 mm[.51 in]Connector Width20 mm[.78 in]Row-to-Row Spacing3.75 mm[.147 in]Usage ConditionsOperating Temperature Range-55 – 105 °C[-67 – 221 °F]Operation/ApplicationCircuit ApplicationSignalIndustry Standards | Housing Material | Thermoplastic GF |
| Connector Length 8.9 mm[.35 in] Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 - 105 °C[-67 - 221 °F] Operation/Application Circuit Application Signal Industry Standards | Centerline (Pitch) | 2.5 mm[.098 in] |
| Connector Height 12.98 mm[.51 in] Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Dimensions | |
| Connector Width 20 mm[.78 in] Row-to-Row Spacing 3.75 mm[.147 in] Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Connector Length | 8.9 mm[.35 in] |
| Row-to-Row Spacing Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Connector Height | 12.98 mm[.51 in] |
| Usage Conditions Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Connector Width | 20 mm[.78 in] |
| Operating Temperature Range -55 – 105 °C[-67 – 221 °F] Operation/Application Circuit Application Signal Industry Standards | Row-to-Row Spacing | 3.75 mm[.147 in] |
| Operation/Application Circuit Application Signal Industry Standards | Usage Conditions | |
| Circuit Application Signal Industry Standards | Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Industry Standards | Operation/Application | |
| | Circuit Application | Signal |
| UL Flammability Rating UL 94V-0 | Industry Standards | |
| | UL Flammability Rating | UL 94V-0 |
| Packaging Features | Packaging Features | |
| Packaging Quantity 600 | Packaging Quantity | 600 |
| Packaging Method Bag | Packaging Method | Bag |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |



| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC |
|--|---|
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | Dynamic 2000 Series

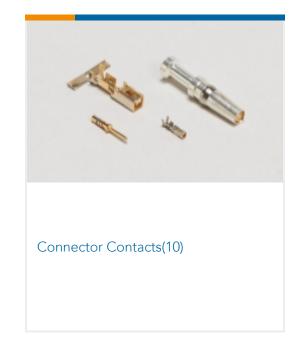




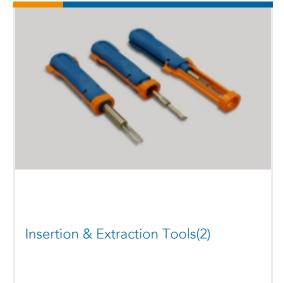





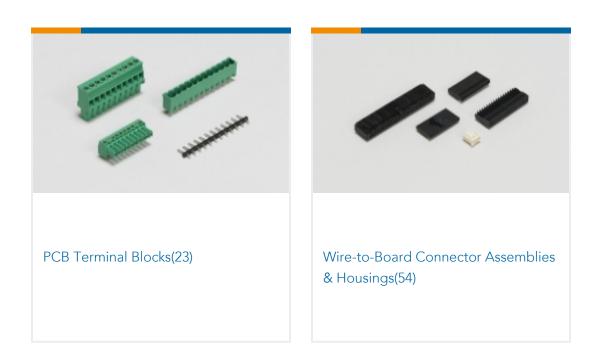

Customers Also Bought













Documents

Product Drawings

DYNAMIC 2000 REC HSG 6P X KEY WITH CUTTI

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1717834-3_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1717834-3_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1717834-3_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Housing, Receptacle, Wire-to-Board / Wire-to-Wire, 6 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 2000 Series



Product Specifications

Dynamic Connector D-2000 Series

Japanese

Application Specification

Japanese