
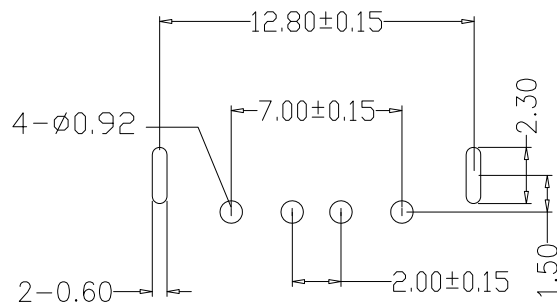
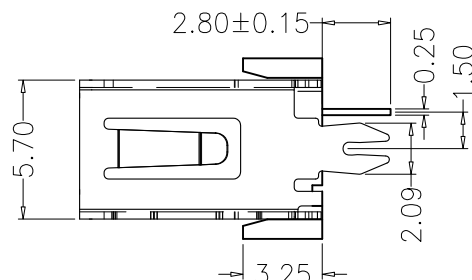
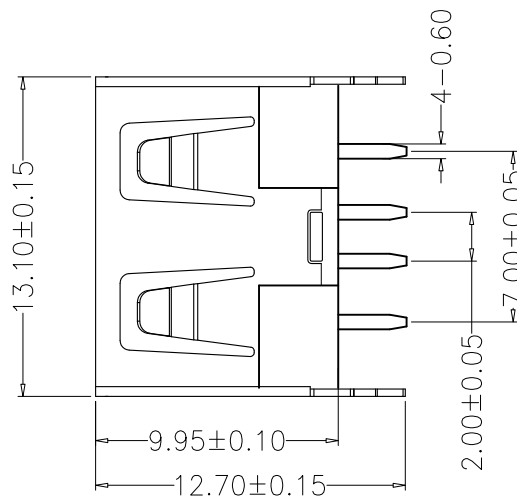


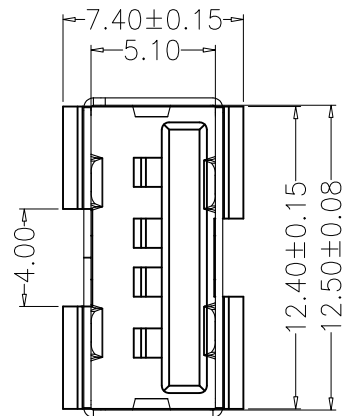

目錄
MAPX

設變內容
MODIFICATION

日期
DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图
PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X'.	±5'
.X	±0.20	.X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	916-362A1014Y10201
比例 SCALE	1:1	审核 CHKD	雷永键	产品名称 PRODUCT NO.	AF10.0短体180度鱼叉脚无边铜壳PBT白胶
日期 DATE	2013.05.10	核准 APPD	雷永键	角法 VIEW	
		版本 VER	AO		