

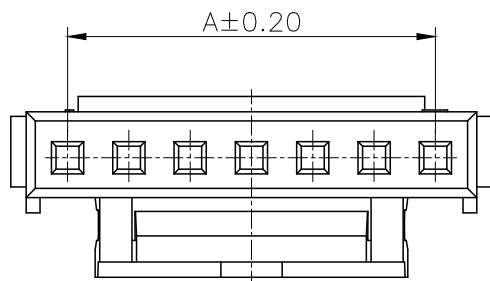
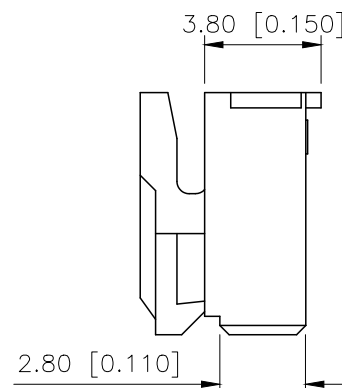
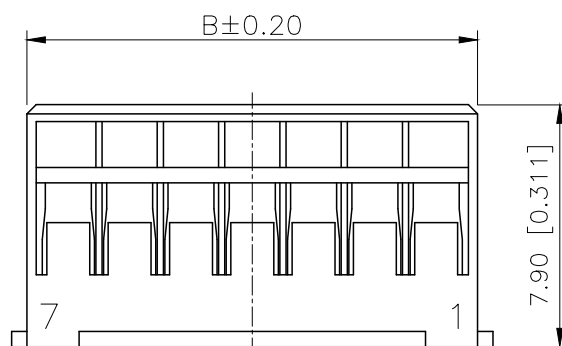


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面新增2PIN卡扣样式说明, 升级整理图面	2024.9.25	阿树

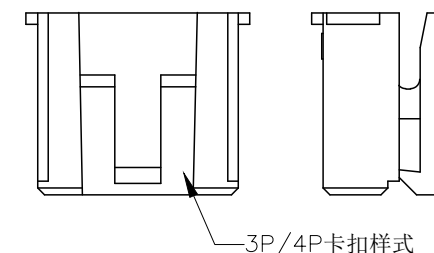

■ SPECIFICATIONS

- Voltage rating:250V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance: $\geq 1000M\Omega$
 - Contact resistance: $\leq 20m\Omega$
- Applicable Wire:30~24AWG

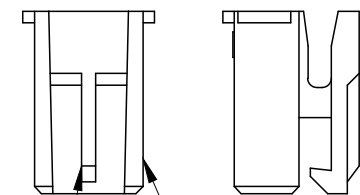

PART NO.:

X2011 H M-XX A-NO
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:H-HSG
③Category:M-Male Housing
④Row No.Pin No:XX-02~15Pin
⑤Plug the Pin &Special No.:A-No Lock
⑥Material:N0-PA66 UL94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	4.70	10	18.00	20.70
03	4.00	6.70	11	20.00	22.70
04	6.00	8.70	12	22.00	24.70
05	8.00	10.70	13	24.00	26.70
06	10.00	12.70	14	26.00	28.70
07	12.00	14.70	15	28.00	30.70
08	14.00	16.70	16	30.00	32.70
09	16.00	18.70	/		

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	 MODEL TYPE: 2.00mm Crimp Style Connector		
CHECKED		UNIT: mm/in	PART NO.: X2011HM-XXA-N0		
APPROVED		SIZE: A4	DWG NO.:		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED