



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Tab**

Wire Size: **4 – 6.63 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp



Barrel Type

Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.5 mm
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	30.1 mm[1.185 in]
Compatible Insulation Diameter Range	3.4 – 5.1 mm[.134 – .2 in]
Wire Size	4 – 6.63 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	2500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

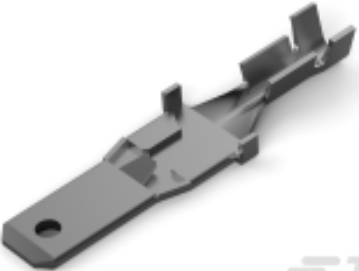 TE Part # 1-1579007-4 EXTRACTION TOOL	 TE Part # 4-1579007-3 EXTRACTION TOOL KIT	 TE Part # 280074-2 FF 375 TAB 6-10MM2 PTBR	 TE Part # 175048-1 FF 187 TAB 2-3MM2 PTBR
 TE Part # 180250 HHHT FSTON/FF 375 POS LOC 250 6-2 ASSY	 TE Part # 2150459-2 OCEAN_2.0_Applicator-E-160F210F-REA	 TE Part # 7-2150459-7 OCEAN_2.0_SPARE_PART_KIT-160F210F	 TE Part # 2379381-2 SDE F, FASTIN-FASTON, 4.0-6.0mm2, DIE SET
 TE Part # 2379381-1 SDE F, FASTIN-FASTON, 4.0-6.0mm2, ASSY	 TE Part # 144838-2 FF 5MM TAB 22-17 AWG .031 PTPB		

Also in the Series | FASTIN-FASTON 250



Crimp Terminal Housings(210)



Insertion & Extraction Tools(2)




PCB Terminals(2)




Quick Disconnects(251)


Customers Also Bought

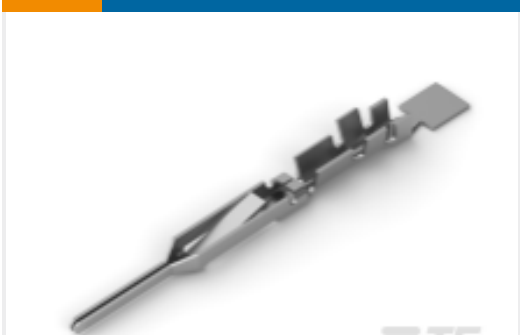

TE Part #1-86561-0
FFC,PIN CONTACT,LP,ROUND WIRE,

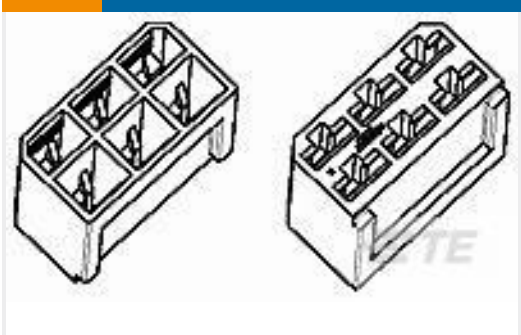

TE Part #280314
FF 250 REC HSG 6P NYLON CLEAR

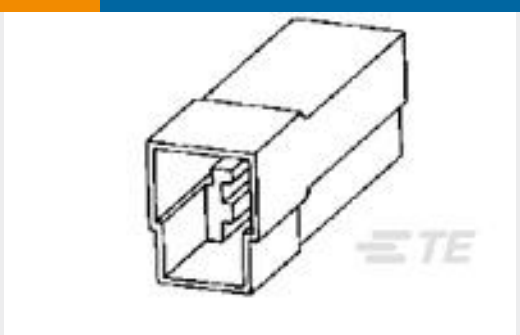

TE Part #180940
FF 250 TAB HSG 3P NYLON NAT



TE Part #165143
PG WIRE PIN 22-16



TE Part #160450-2
FF 250 TAB 18-14AWG TPPB



TE Part #180367-2
250 FASTON,REC.,12-10 AWG,TPBR



TE Part #336765-000
CWT-3807-W1



TE Part #2141256-1
2POS,AMP MCP6.3/4.8K,REC HSG, ASSY



TE Part #2-963749-1
TAB TAB PTCUFE2

Documents

Product Drawings

FF 250 TAB 4-6MM2 PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_180352-2_AP_c-180352-2-ap.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_180352-2_AP_c-180352-2-ap.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_180352-2_AP_c-180352-2-ap.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English