
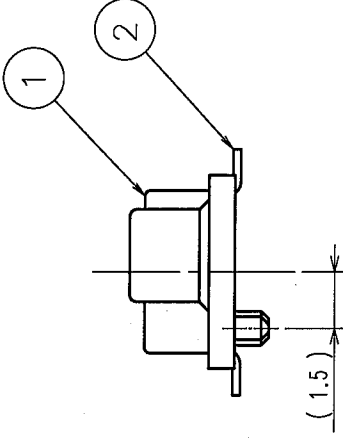


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
①	3	RE-F-09671	K.N	H.Y	04.04.08	△				
②	1	DIS-F-000293	K.D	H.o	05.02.28	△				
③					.	△				
④					.	△				


RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

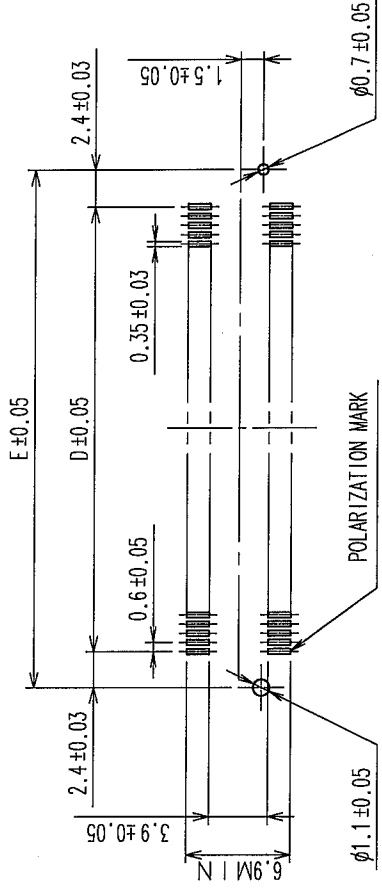

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED
ACCORDING TO CIRCUMSTANCES.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5. NUMBER OF CONTACTS.

1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μ m min. LEAD AREA: GOLD FLASH UNDER PLATING: NICKEL 0.5μ m min.	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL		DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
		S. SUZUKI		K. NAKAMURA	H. OKAWA	Y. YOSHIMURA	
		03.03.06		03.03.06	03.03.06	03.03.06	
DRAWING NO.		PART NO.		FX8-**-P-SV(92)			
SCALE		EDC3-150726-22		CODE NO.		CL578	
FREE		HRS		HIROSE ELECTRIC CO., LTD		1/2	
UNITS		mm					

PART No.	CODE No.	5	A	B	C	D	E
FX8-60P-SV(92)	CL578-0001-6-92	60	24.6	23	20.7	17.4	22.2
FX8-80P-SV(92)	CL578-0003-1-92	80	30.6	29	26.7	23.4	28.2
FX8-90P-SV(92)	CL578-0004-4-92	90	33.6	32	29.7	26.4	31.2
FX8-100P-SV(92)	CL578-0005-7-92	100	36.6	35	32.7	29.4	34.2
FX8-120P-SV(92)	CL578-0006-0-92	120	42.6	41	38.7	35.4	40.2
FX8-140P-SV(92)	CL578-0007-2-92	140	48.6	47	44.7	41.4	46.2

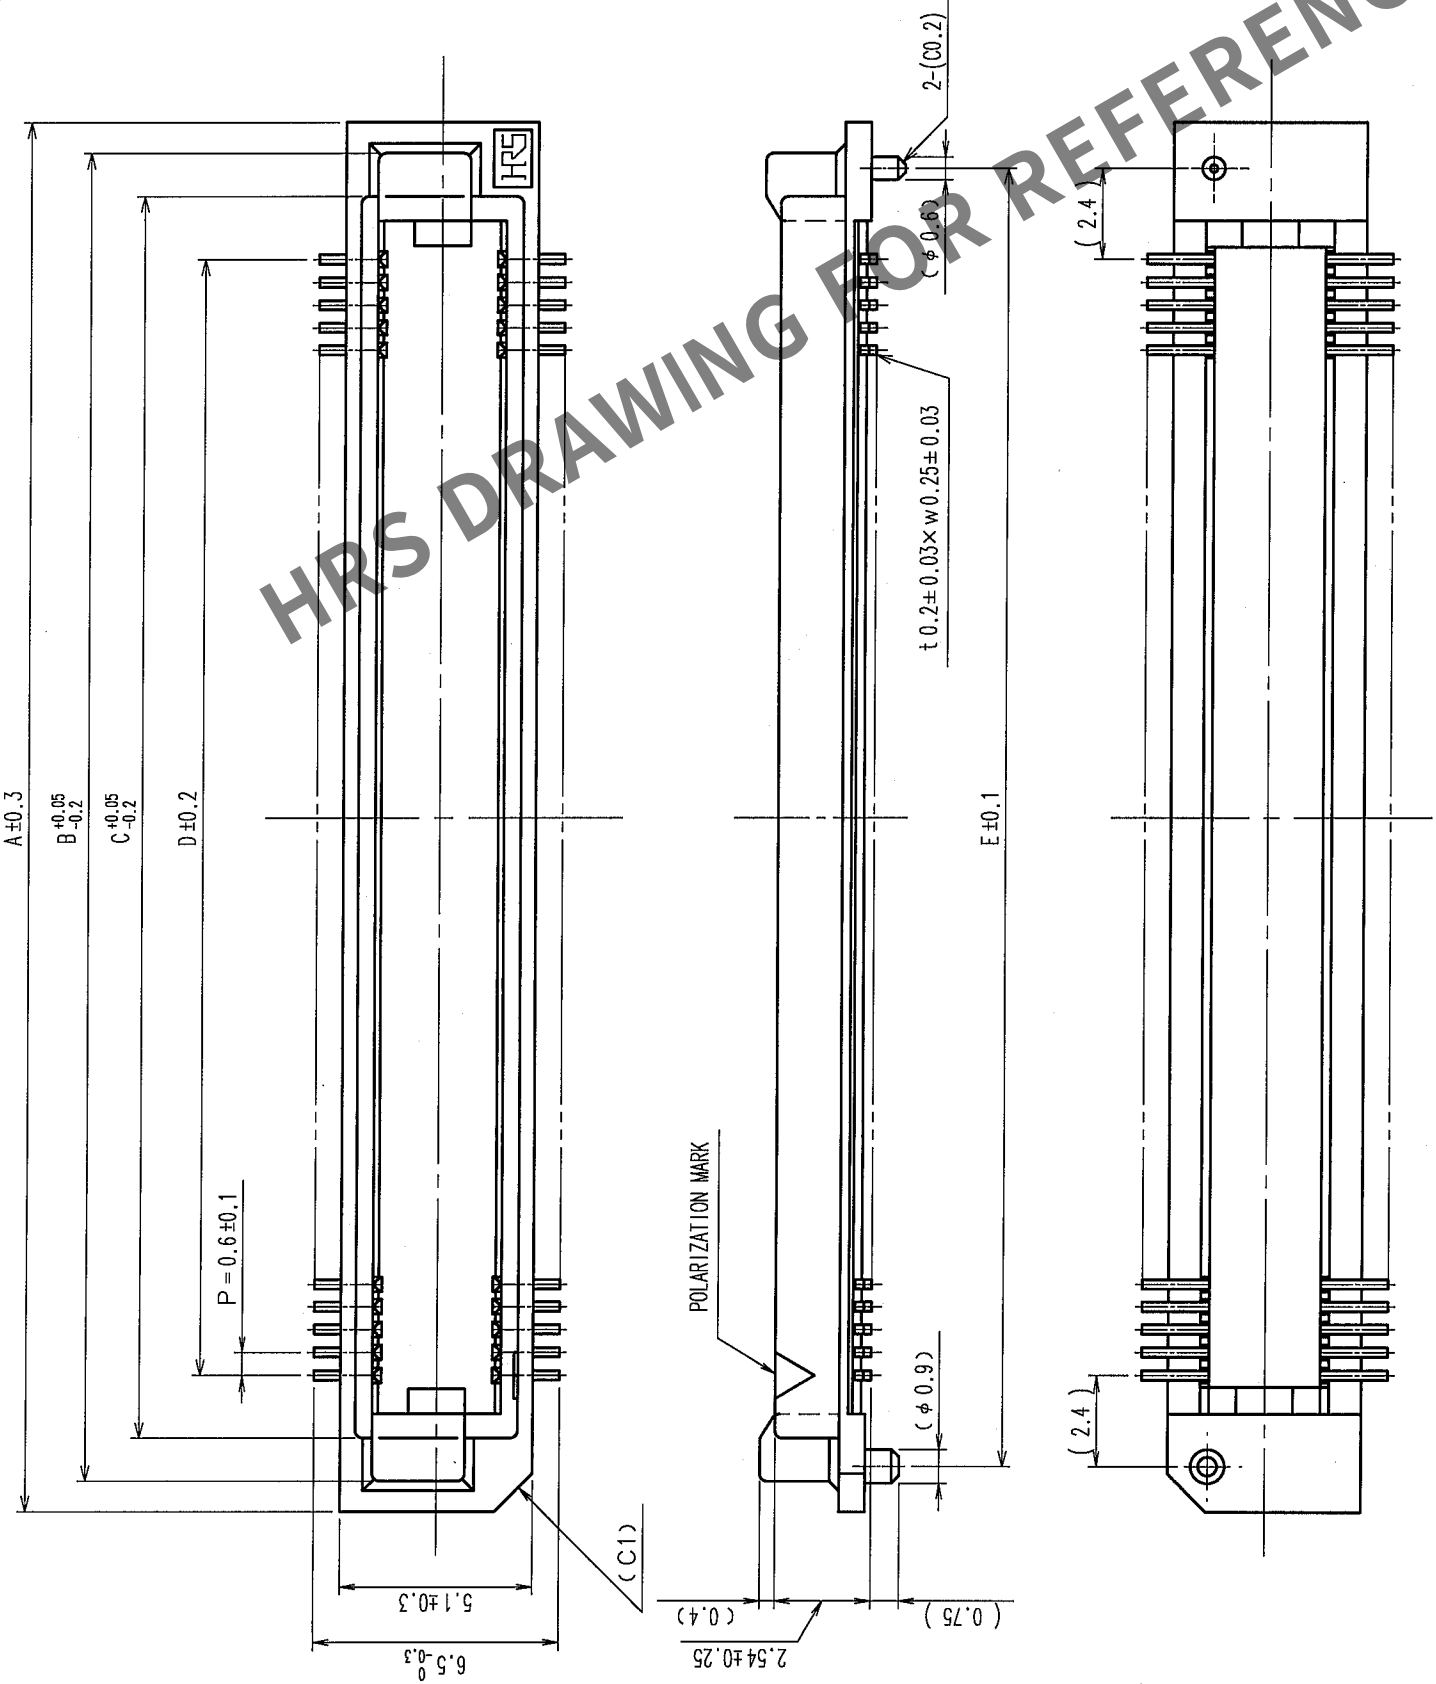

TO	PCK			
----	-----	--	--	--

