

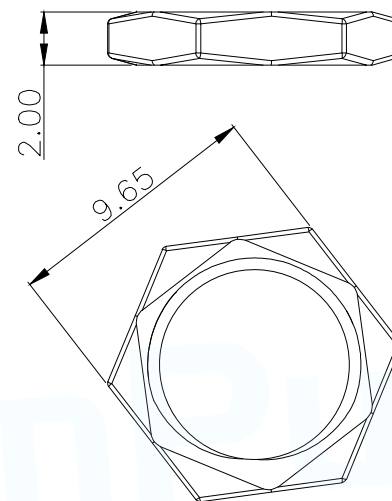
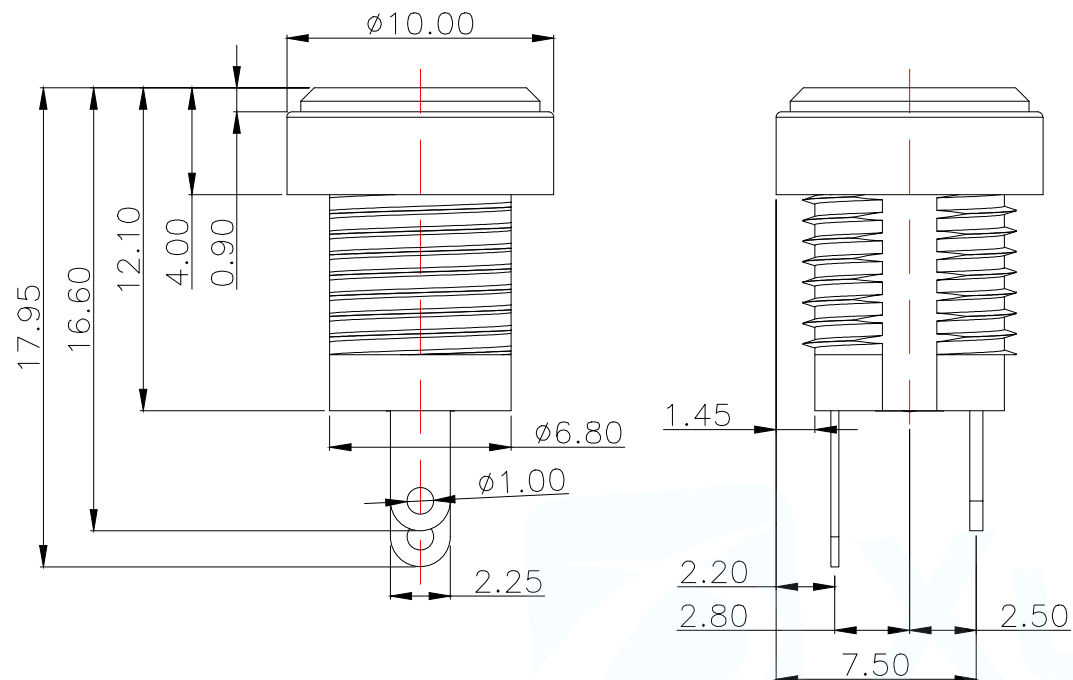



Main technical performance	
Rated electrical load	DC 24V 6A
Contact resistance	$\leq 0.03\Omega$
Insulation resistance	$\geq 100M\Omega$
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles

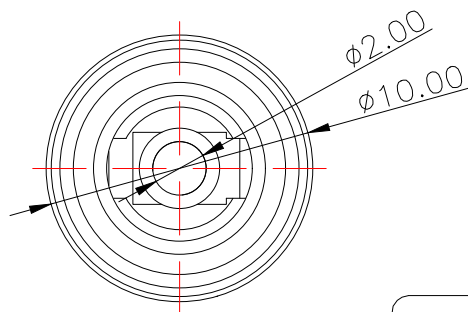

SCHEMATIC

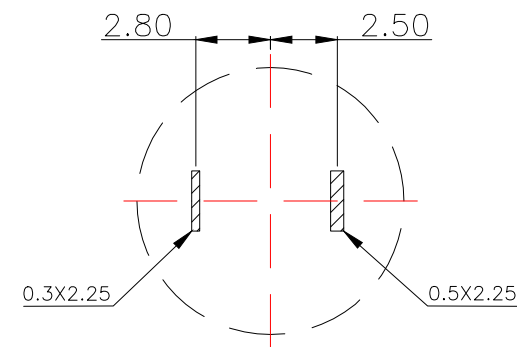

PCB.WELDING DRAWING

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DC SOCKET	
DECIMALS:	ANGLES:	PAR	DC-022B-A200
X.X $\pm$ 0.30	X.* $\pm$ 5°	DWN	
X.XX $\pm$ 0.25	X.X° $\pm$ 1°	CHKD	
X.XXX $\pm$ 0.15		APVD	
CUSTOMER COPY		SCALE N:A	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A