



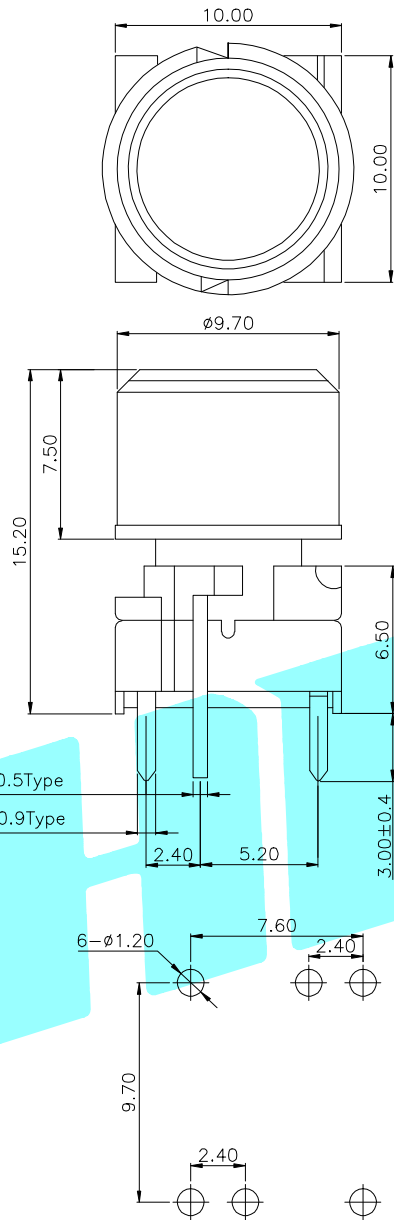

PCBLayout pattern Side

- Typical Specifications
- 1.Rating : DC 12V 50mA
 - 2.Operating Force : 250 ± 50 gf
 - 3.Contact Resistance : 100mΩMAX
 - 4.Life : 100,000 Cycles Min

LEDcolour(LED颜色)	Part No.(料号)
White(白色)	K6-1064C01
Red(红色)	K6-1064C02
Blue(蓝色)	K6-1064C03
Green(绿色)	K6-1064C04
Yellow(黄色)	K6-1064C05
Orange(桔色)	K6-1064C06



Circuit Diagram

②	Terminal	_____		Phosphor bronze	Ag Plating	_____
①	Housing	_____		Nylon	Black	_____
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		 ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED				TITLE:	LED Tact Switch	
APPROVALS				PART NO.	K6-1064C 	
TOLERANCES ARE	30~ 	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
		±2'				
				DRAWING NO.	_____	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			