

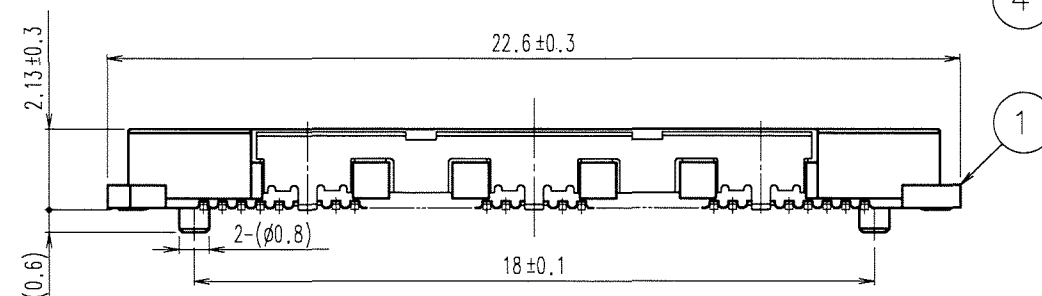






	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

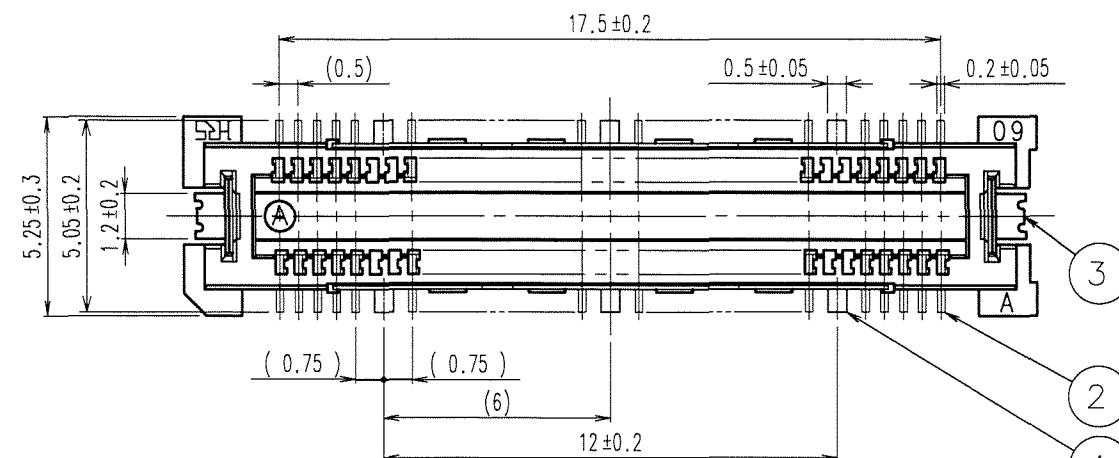


RECOMMENDED LAND PATTERN DIMENSION OF PCB

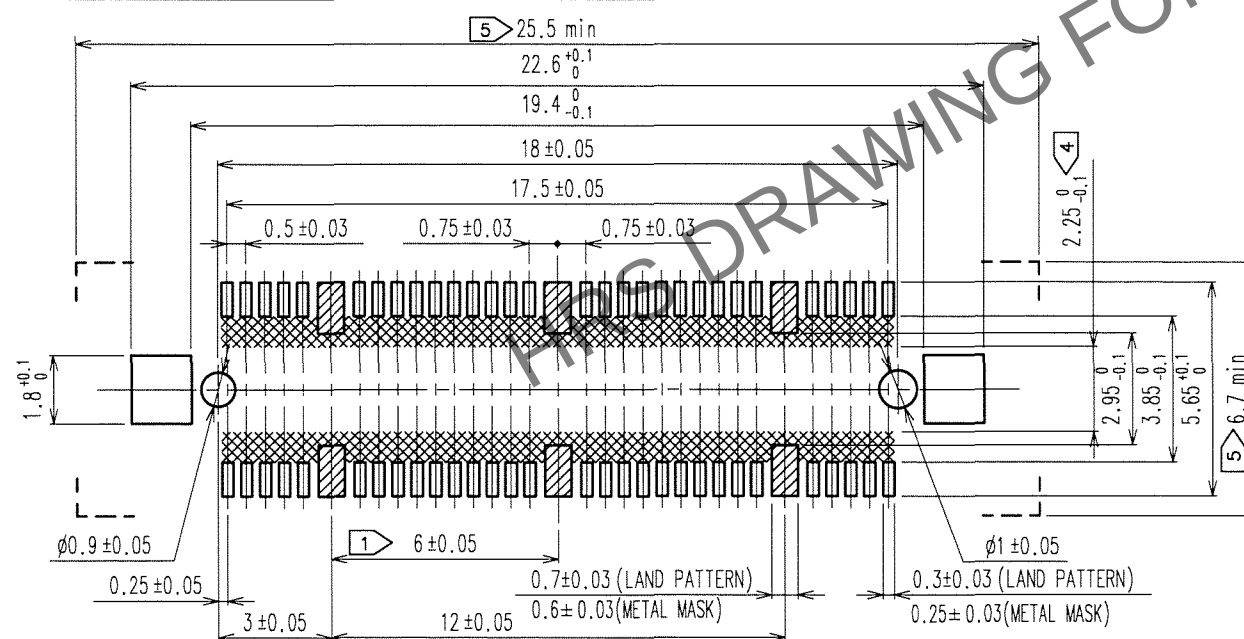

NOTES ① 6 HATCHED  PARTS:GROUND CIRCUIT.
2 SMT LEAD-COPLANARITY:0.1 MAX.
3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR
LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR
CANNOT BE MATED.
6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

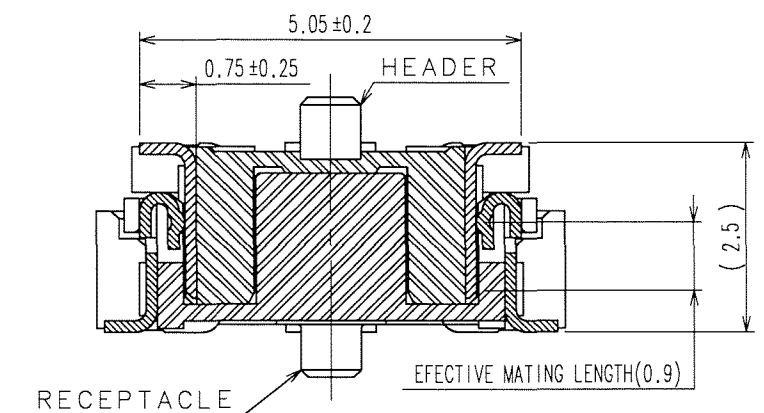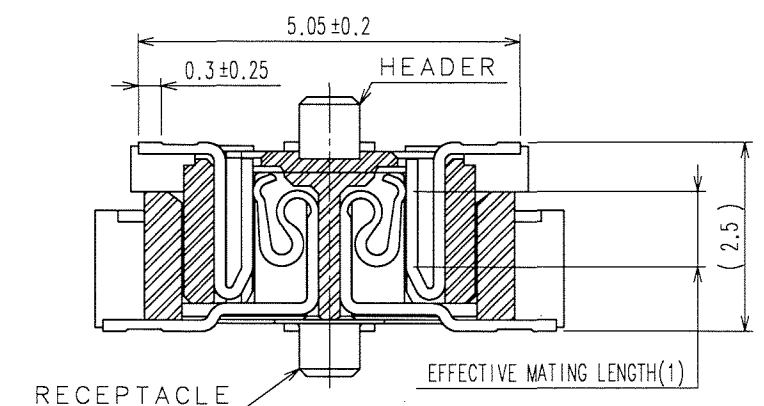

3, 4		PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.		
1		LCP	BEIGE UL94V-0			LEAD AREA : GOLD FLASH		
NO.		MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING : NICKEL 1μm min.		
CODE NO. (OLD)		CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
				A.SUZUKAWA '06.10.11	<i>H. Nakamura</i> '06.10.11	<i>T. Ogawa</i> '06.10.11	<i>H. Okawa</i> '06.10.11	
		DRAWING NO.			PART NO.			
SCALE		EDC3-152597-25			FX11A-60P/6-SV(71)			
5 : 1		 HIROSE ELECTRIC CO., LTD.			CODE NO.			1
UNITS					CL573-0502-0-71			1