

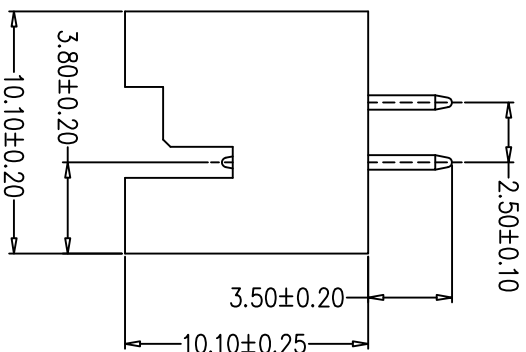
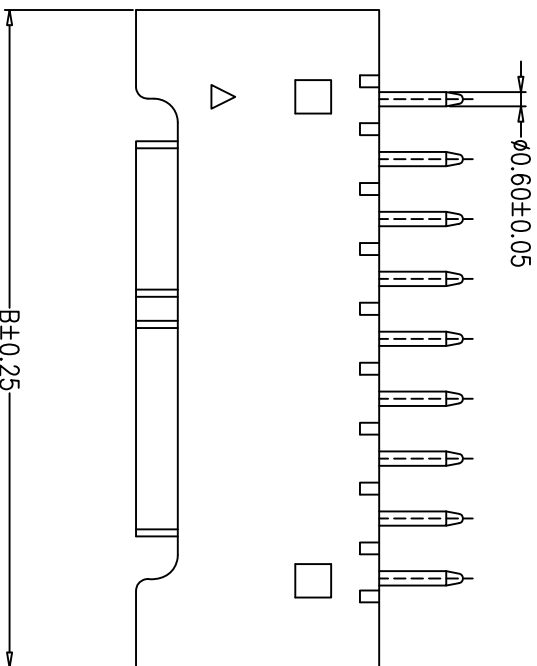


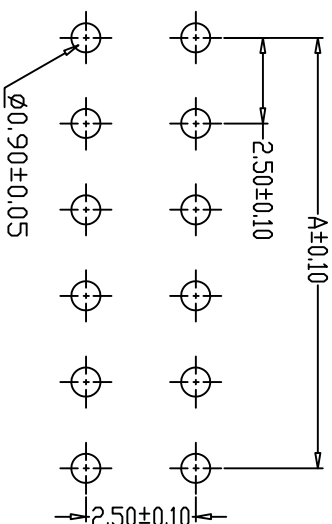

- SPECIFICATIONS
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1000V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

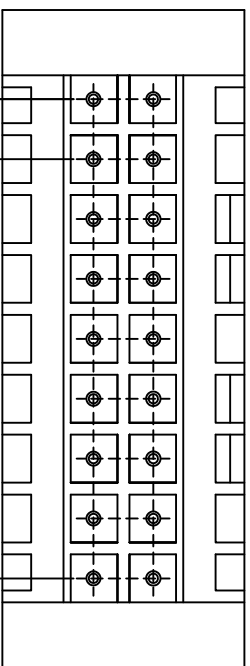

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A2508-2X04A	7.50	15.00
A2508-2X05A	10.00	17.50
A2508-2X06A	12.50	20.00
A2508-2X07A	15.00	22.50
A2508-2X08A	17.50	25.00
A2508-2X09A	20.00	27.50
A2508-2X10A	22.50	30.00
A2508-2X11A	25.00	32.50
A2508-2X12A	27.50	25.00
A2508-2X13A	30.00	37.50
A2508-2X14A	32.50	40.00
A2508-2X20A	47.50	55.00



单位
UNIT

比例
SCALE

mm

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

批准:
APPROVED BY

版本:
A0

产品名称
Production name

XA双排直针 WAFER DIP TYPE

审核:
CHECKED BY

页次:
1/1

产品料号
Product No

TH-A2508-2XNA

制图:
DRAWN BY

封文辉
2022.9.6

日期:
Client No

. XXX±0.005, XXX ±

. XX ±

. XX ±0.20, XX ±

. XXX±0.005, XXX ±

. XX ±

. XX ±0.20, XX ±

. XXX±0.005, XXX ±

. XX ±

. XX ±0.20, XX ±

TH-A2508-2XNA