

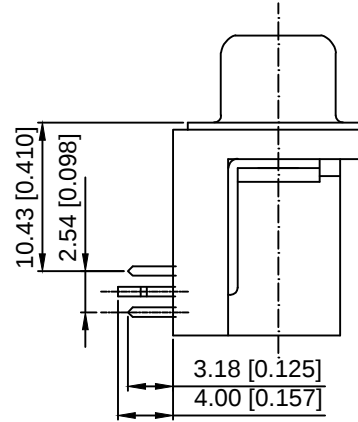


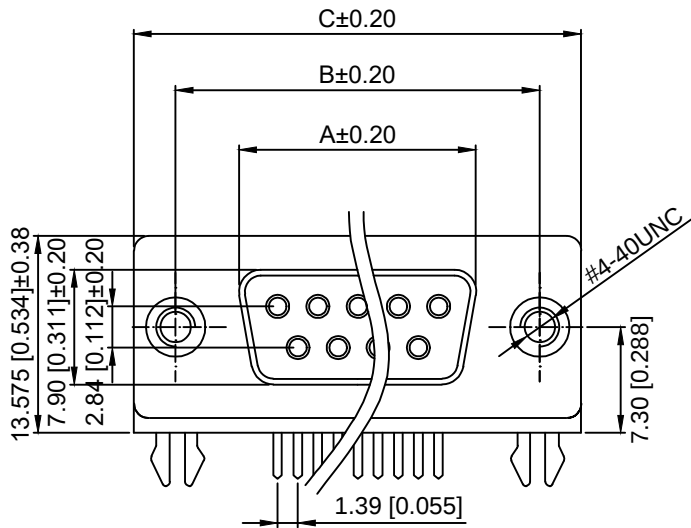

Specifications:
 规格:
 Current rating: 5A AC/DC
 额定电流: 5A AC/DC
 Voltage rating: 250V AC
 额定电压: 250V AC
 Withstanding voltage: 500V AC/MIN
 耐受电压: $\geq 500V$ AC/分钟
 Temperature range: $-55^{\circ}C$ - $+105^{\circ}C$
 温度范围: $-55^{\circ}C$ - $+105^{\circ}C$
 Insulation resistance: 1000M Ω MIN
 绝缘电阻: $\geq 1000M\Omega$
 Contact resistance: 30m Ω MAN
 接触电阻: $\leq 30m\Omega$
 Material And FINISHED:
 材料和成本:
 INSULATOR: PBT UL 94V-0
 绝缘体: PBT UL 94V-0
 SHELL: STEEL
 外壳: 钢
 CONTACT MATERIAL: BRASS
 触点材料: 黄铜



X03 XX F T X X X H
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series NO.
 ② Row No. Pin No: XX-09,15,25,37
 ③ Welding Board Angle : F-Female
 ④ T: Traditional
 ⑤ Planting Category: 1: Gold 1u ; 2: Gold 2u ; 3: Gold 3u ; 4: Gold 5u ; 5: Gold 15u ;
 6: Gold 30u ; 7: Terminal half- Gold Bright Tin ; 8: Terminal half- Gold 2u Bright Tin
 9: Terminal half- Gold 3u Bright Tin ; 10: Terminal half- Gold 5u Bright Tin
 11: Terminal half- Gold 15u Bright Tin ; 12: Terminal half- Gold 30u Bright Tin
 13: Terminal half- Gold Matte Tin ; 14: Terminal half- Gold 2u Matte Tin
 15: Terminal half- Gold 3u Matte Tin ; 16: Terminal half- Gold 5u Matte Tin
 17: Terminal half- Gold 15u Matte Tin ; 18: Terminal half- Gold 30u Matte Tin
 ⑥ B: Black W: White BL: Blue
 ⑦ 1: TYPE-1; 2: TYPE-2
 ⑧ H: Heightened



NO.OF CONTACT	A ± 0.20	B ± 0.20	C ± 0.20	D
09	16.34	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	D-USB
CHKD		UNIT: mm/in	PART NO.: X03XXFTXXXH
APPD		SIZE: A4	DWG NO.: X-X03XXFTXXXH
			WEIGHT
			SHEET
			REVISION
			1/1
			A0

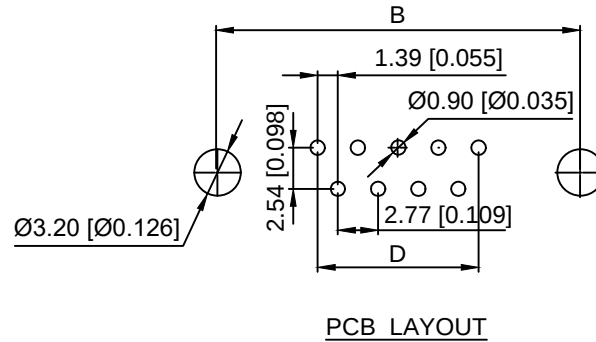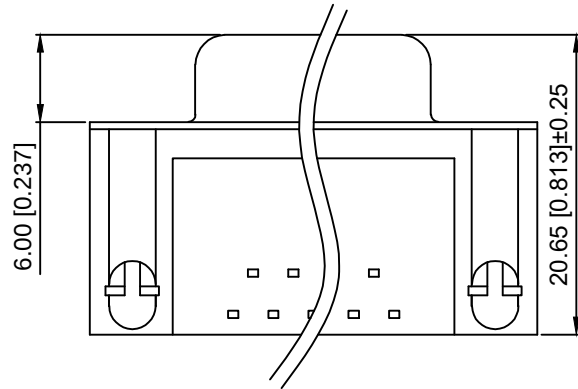

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED