


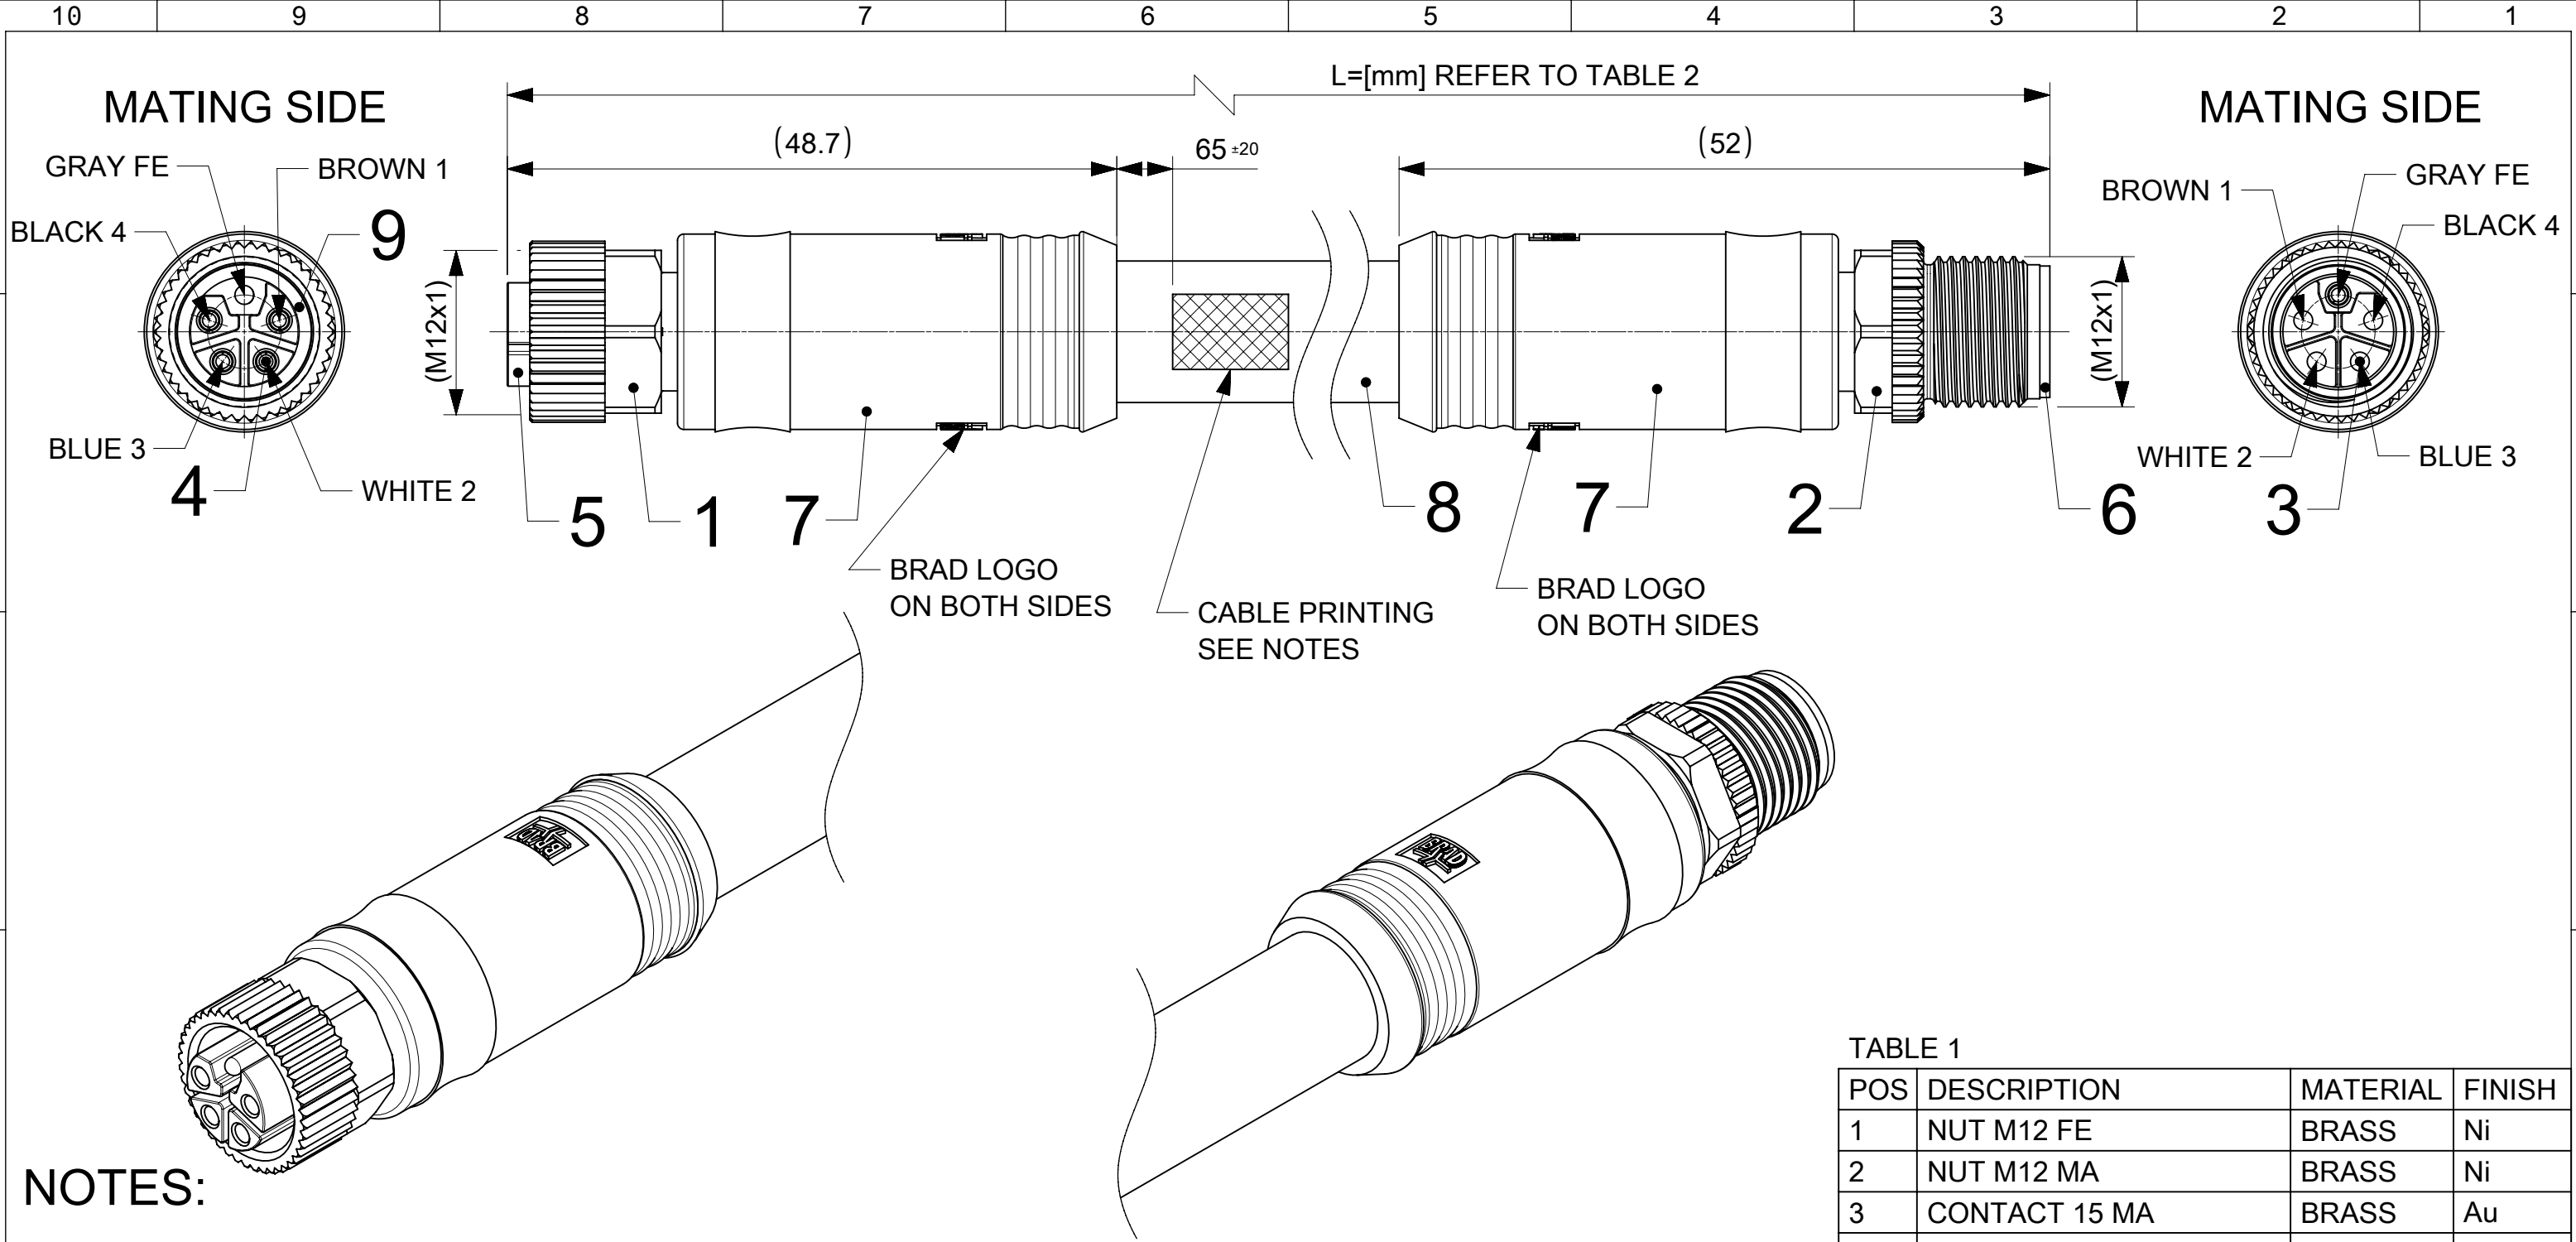

NOTES:

RATED VOLTAGE: MAX. 63V AC/DC
RATED CURRENT: MAX. 16A at 40°C (derating has to be considered)
IP RATING: IP67 (mated and locked condition)
TEMPERATURE RANGE: -25°C TO +85°C

CABLE PRINTING (sequence as shown below):

- MOLEX engineering no. (see page 2)
- MOLEX material no. (see page 2)
- MOLEX MAX. 63V AC/DC MAX. 16 A USL
- MOLEX AND DATE OF MANUFACTURING (YY=YEAR; WW=WEEK): MXYWW
- Not for current interrupting
- PROFINET 24V Power 4x2,5 + FE

PART ACCORDING PRODUCT SPEC: 1205010169
PACKAGING ACCORDING PACKAGING SPEC: 1201202000

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

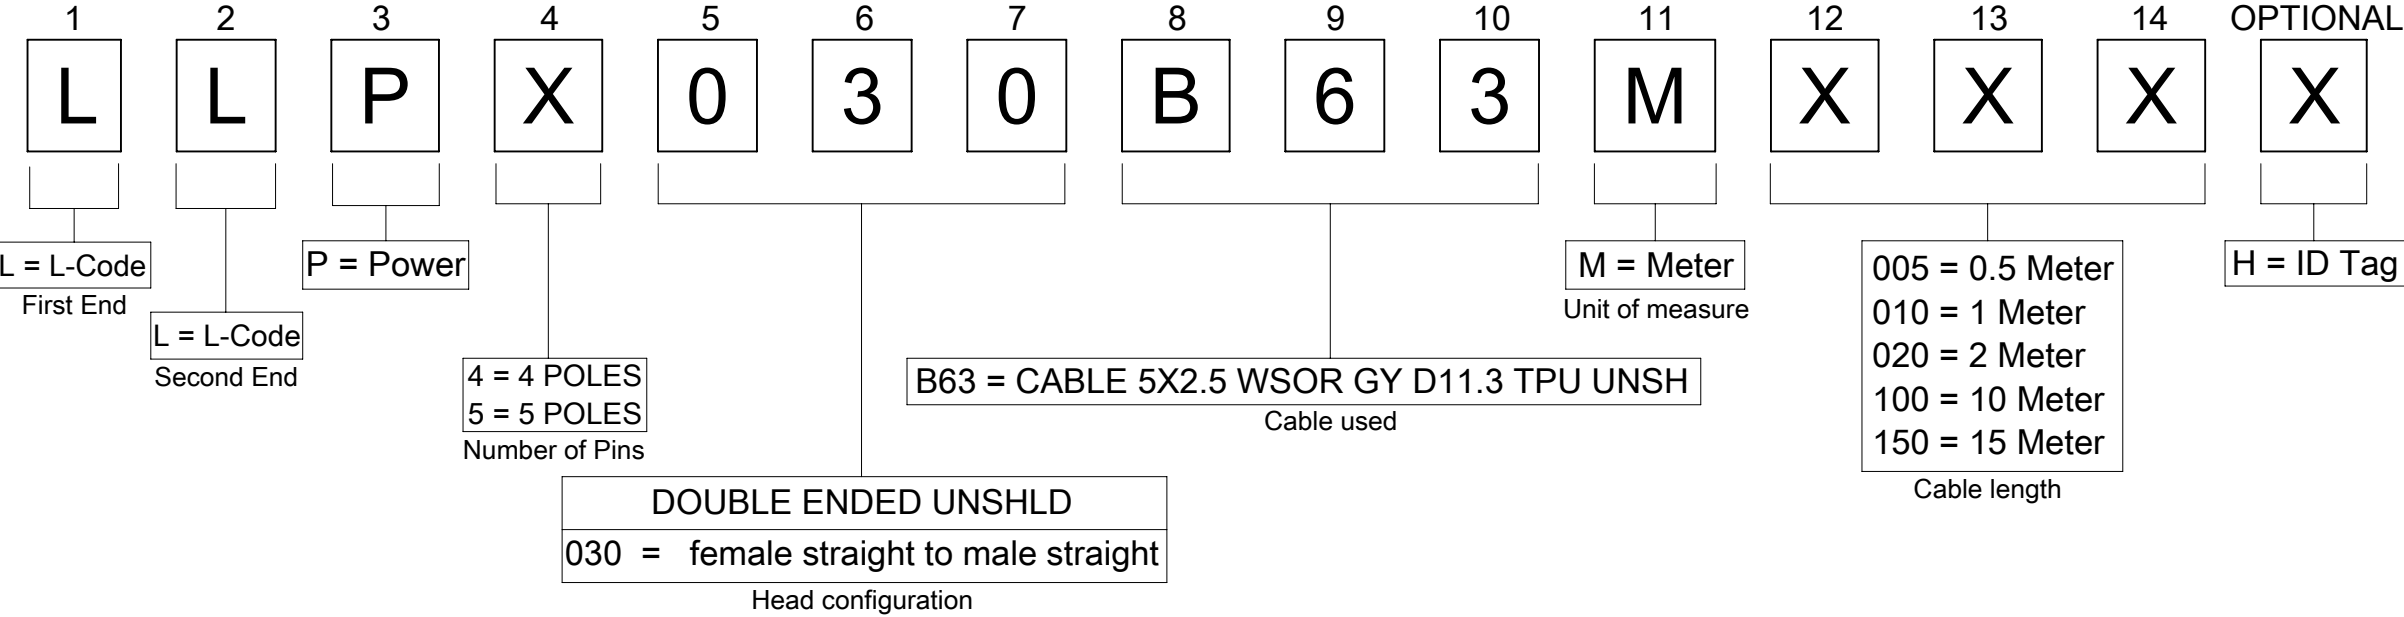


TABLE 2

NOMINAL SECTION 2,5mm²			
MATERIAL NO.	ENGINEERING NO.	L [mm]	TOLERANCE [mm]
1205010283	LLP5030B63M003	300	+40
1205010100	LLP5030B63M005	500	+40
1205010286	LLP5030B63M070	700	+40
1205010101	LLP5030B63M010	1000	+40
1205010102	LLP5030B63M020	2000	+60
1205010103	LLP5030B63M030	3000	+60
1205010284	LLP5030B63M040	4000	+60
1205010104	LLP5030B63M050	5000	+60
1205010285	LLP5030B63M060	6000	+80
1205010286	LLP5030B63M070	7000	+80
1205010287	LLP5030B63M080	8000	+80
1205010105	LLP5030B63M100	10000	+80
1205010288	LLP5030B63M120	12000	+140
1205010289	LLP5030B63M140	14000	+140
1205010106	LLP5030B63M150	15000	+140
1205010290	LLP5030B63M180	18000	+160
1205010107	LLP5030B63M200	20000	+160
1205010291	LLP5030B63M230	23000	+160
1205010292	LLP5030B63M270	27000	+160
1205010293	LLP5030B63M300	30000	+160
1205010294	LLP5030B63M340	34000	+350
1205010295	LLP5030B63M380	38000	+380
1205010296	LLP5030B63M420	42000	+420
1205010297	LLP5030B63M460	46000	+460
1205010298	LLP5030B63M500	50000	+500
1205010299	LLP5030B63M540	54000	+540
1205010300	LLP5030B63M570	57000	+570
1205010301	LLP5030B63M610	61000	+610

NOMINAL SECTION 2,5mm²				
MATERIAL NO.	ENGINEERING NO.	L [mm]	TOLERANCE [mm]	QYT. ID CARRIER
1205010169	LLP5030B63M005H	500	+40	2
1205010170	LLP5030B63M010H	1000	+40	2
1205010164	LLP5030B63M020H	2000	+60	2
1205010165	LLP5030B63M030H	3000	+60	2
1205010036	LLP5030B63M050H	5000	+60	2
1205010037	LLP5030B63M100H	10000	+80	2
1205010035	LLP5030B63M150H	15000	+140	2
1205010039	LLP5030B63M200H	20000	+160	2
1205010040	LLP5030B63M250H	25000	+160	2
1205010038	LLP5030B63M300H	30000	+160	2
1205010166	LLP5030B63M350H	35000	+350	2
1205010167	LLP5030B63M400H	40000	+400	2
1205010168	LLP5030B63M450H	45000	+450	2

FUNCTIONAL SYMBOLS

FA

=

0

FE

=

0

FE

=

0

DIVISIONAL SYMBOLS

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

CURRENT REV DESC: NEW P/N'S ADDED

EC NO: 776660

DRWN: RSCHIEBER

CHK'D: RSILLER

APPR: RSILLER

INITIAL REVISION:

DRWN: FDAFERNER

APPR: RSILLER

2024/02/08

2024/02/09

2020/01/30

2021/03/15

DOCUMENT NUMBER

1205010100

DOC TYPE

PSD

DOC PART

000

REVISION

A3

2 OF 2

moLEX

CSE M12 5P LC FE STR MA STR WSOR GY XM

PRODUCT CUSTOMER DRAWING

DOCUMENT STATUS P1 RELEASE DATE 2024/02/09 14:24:19

FORMAT: moLEX 16-05-A3
REVISION: 1
DATE: 2020/01/11