
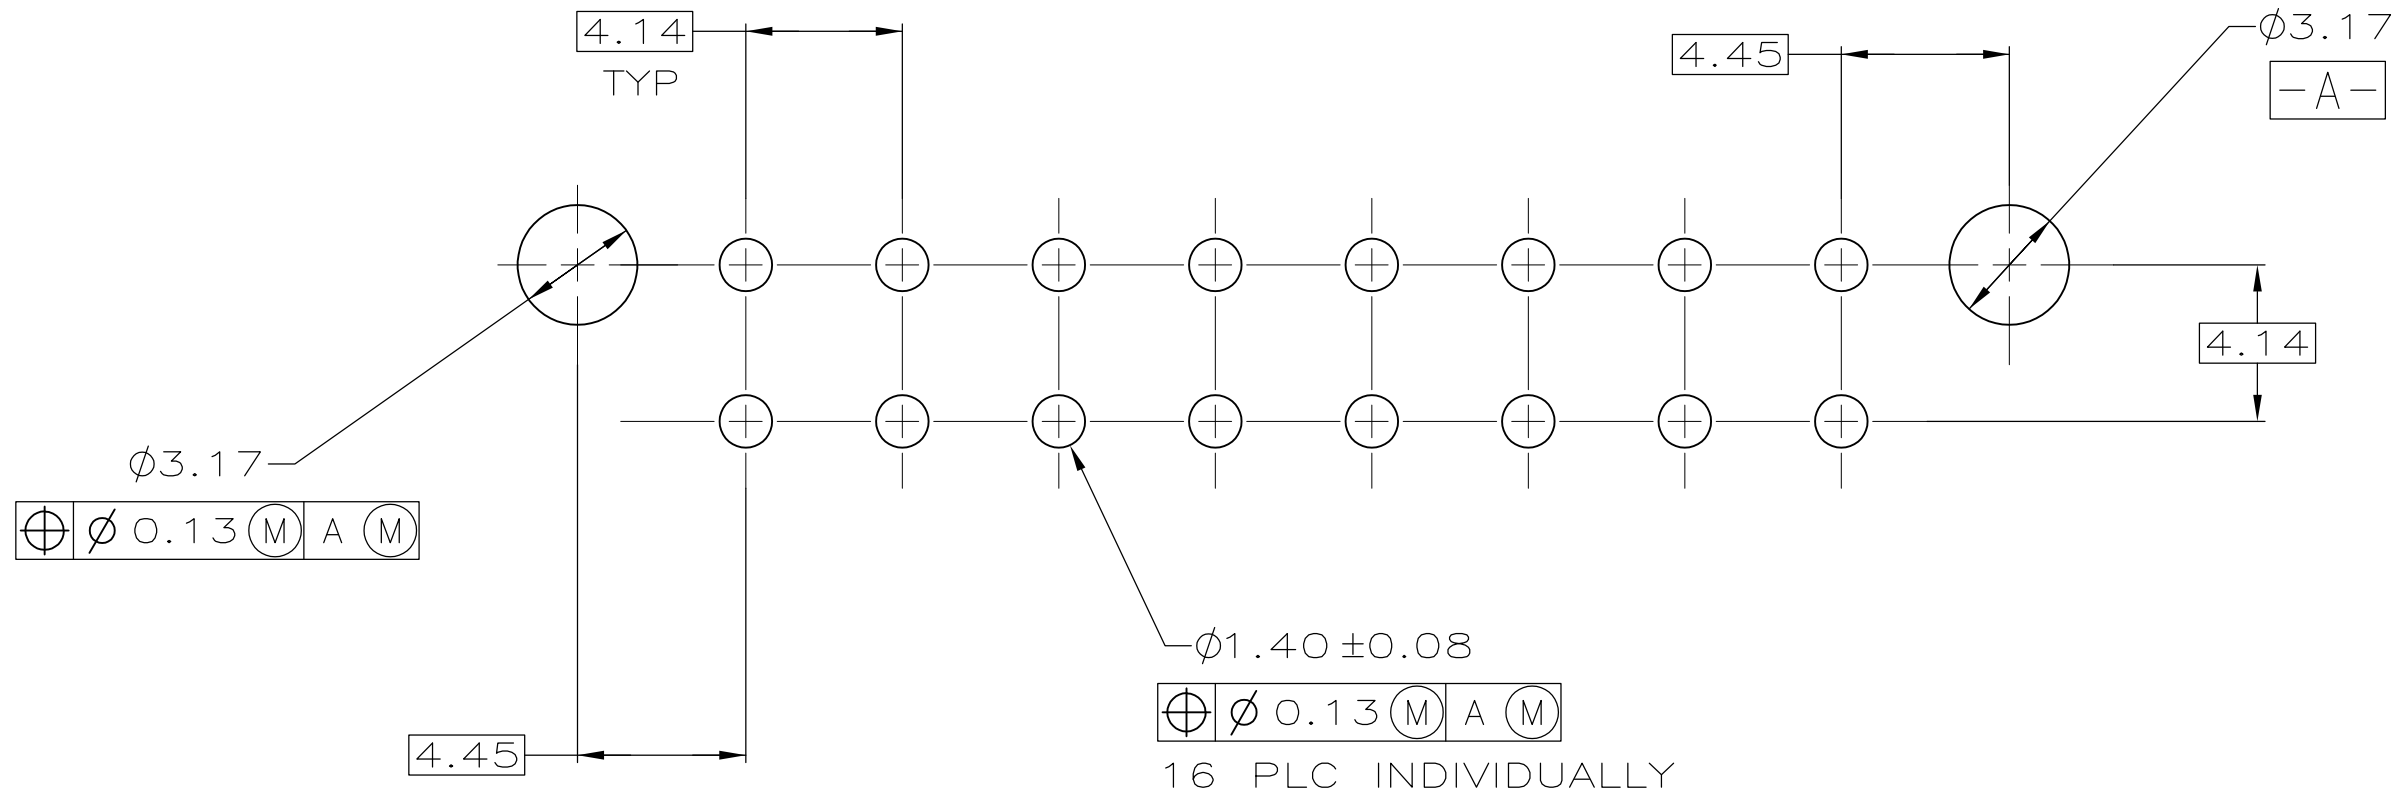
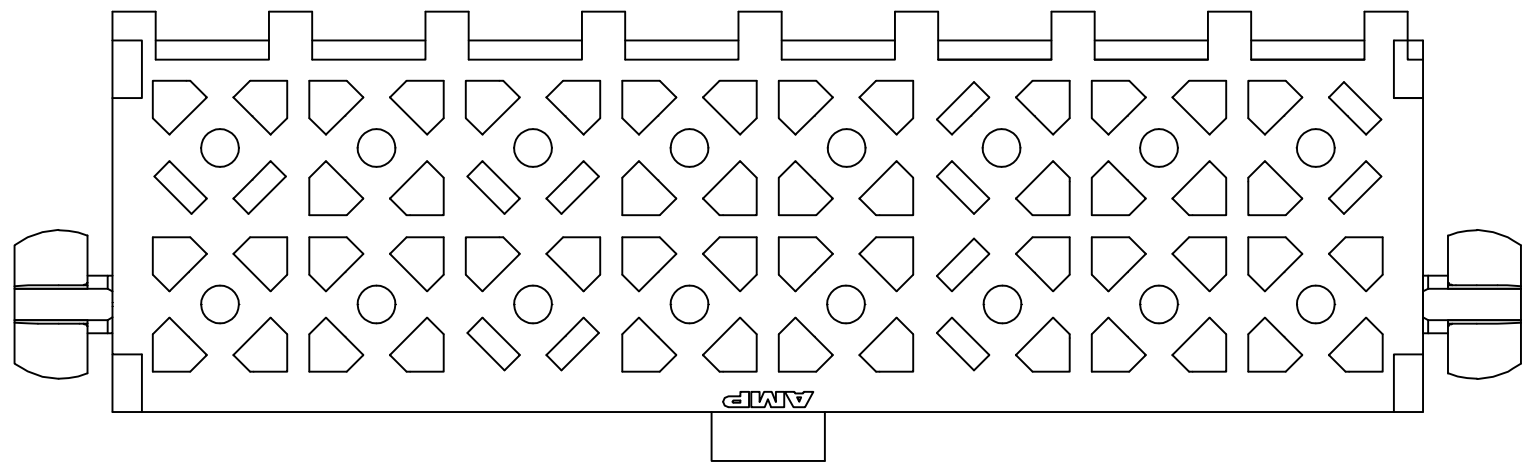
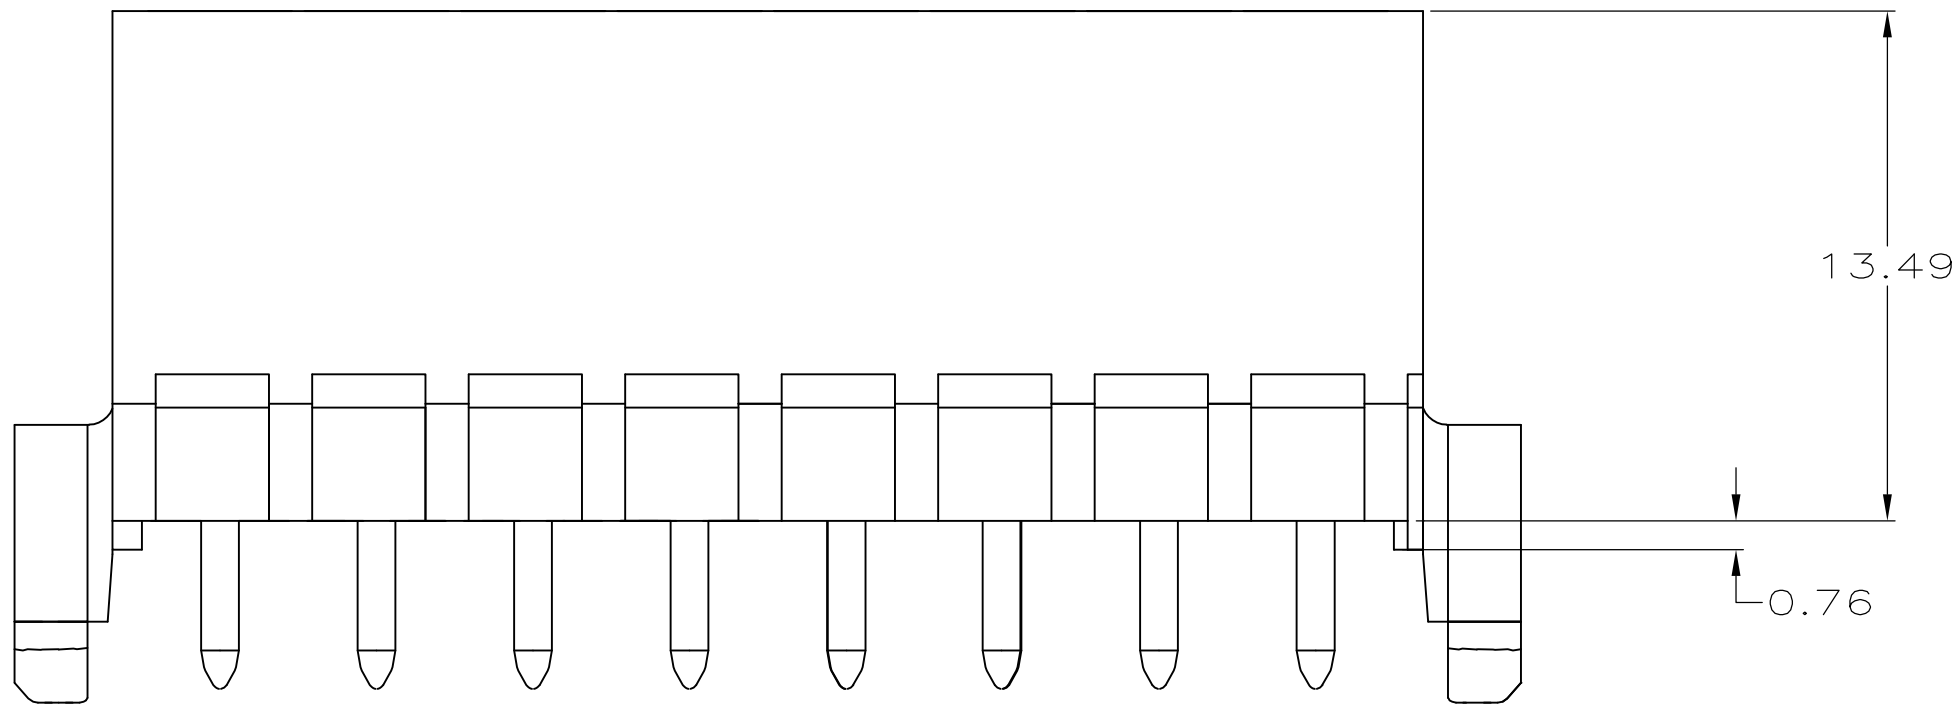
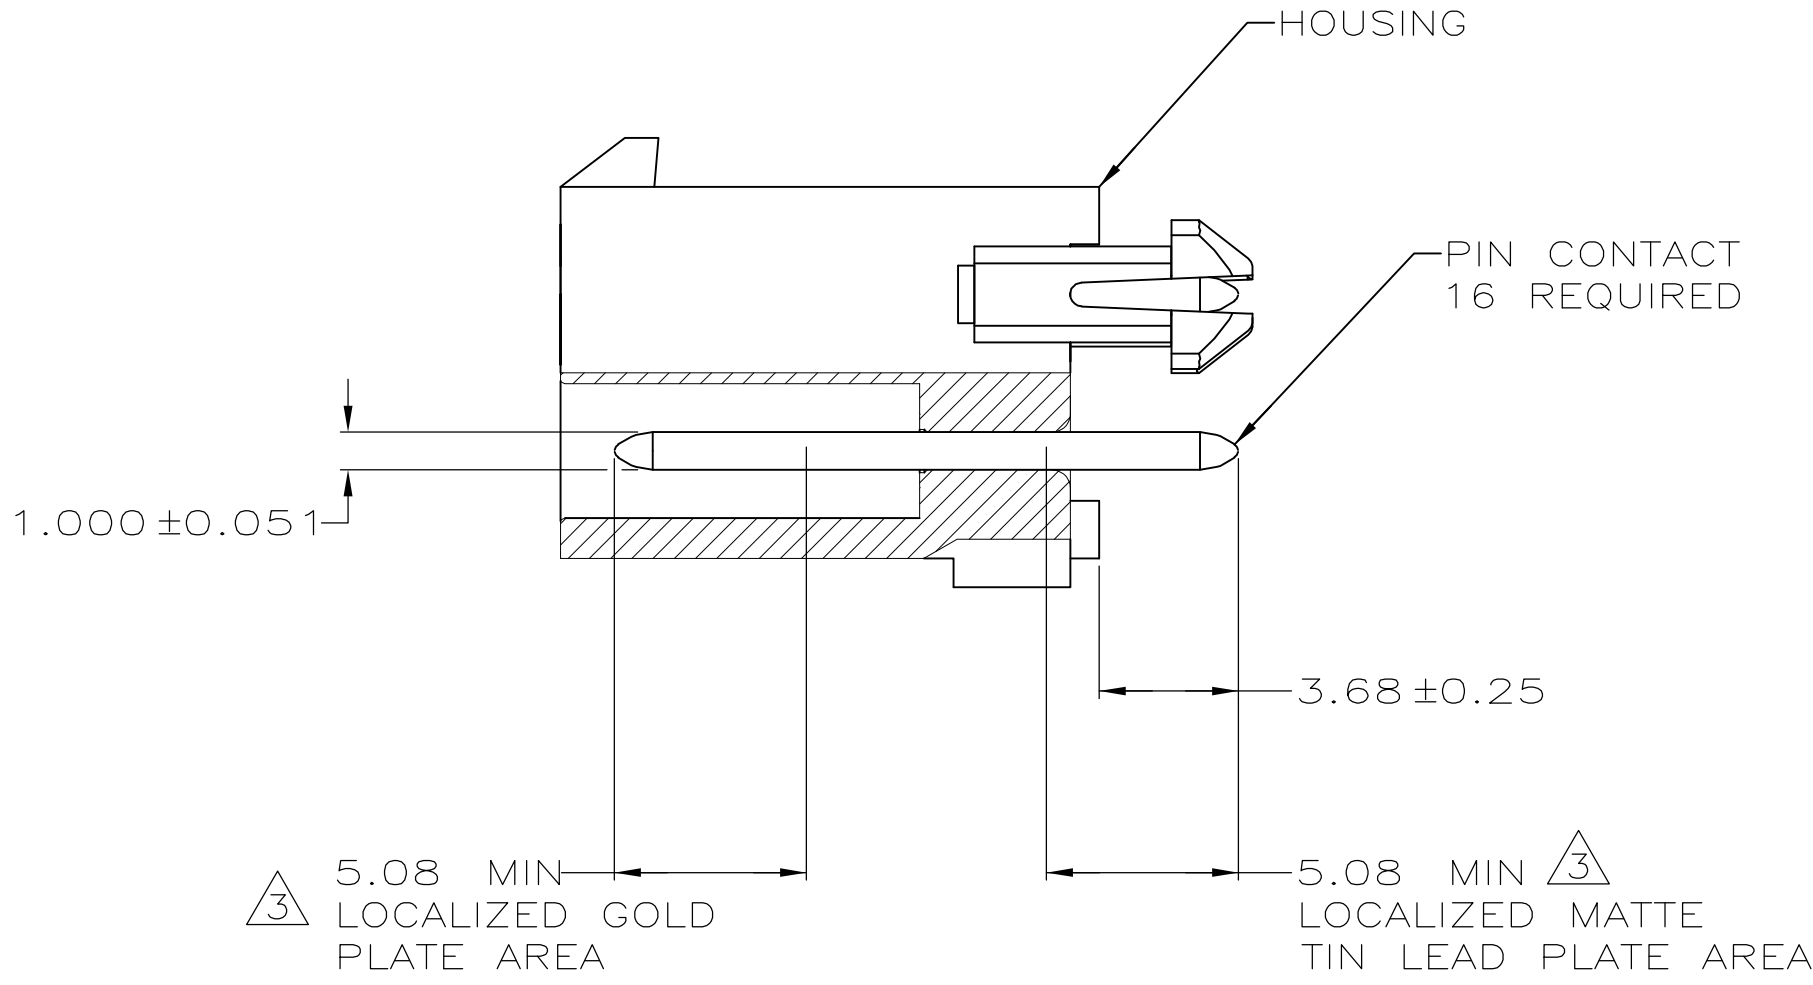


1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
△ 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.

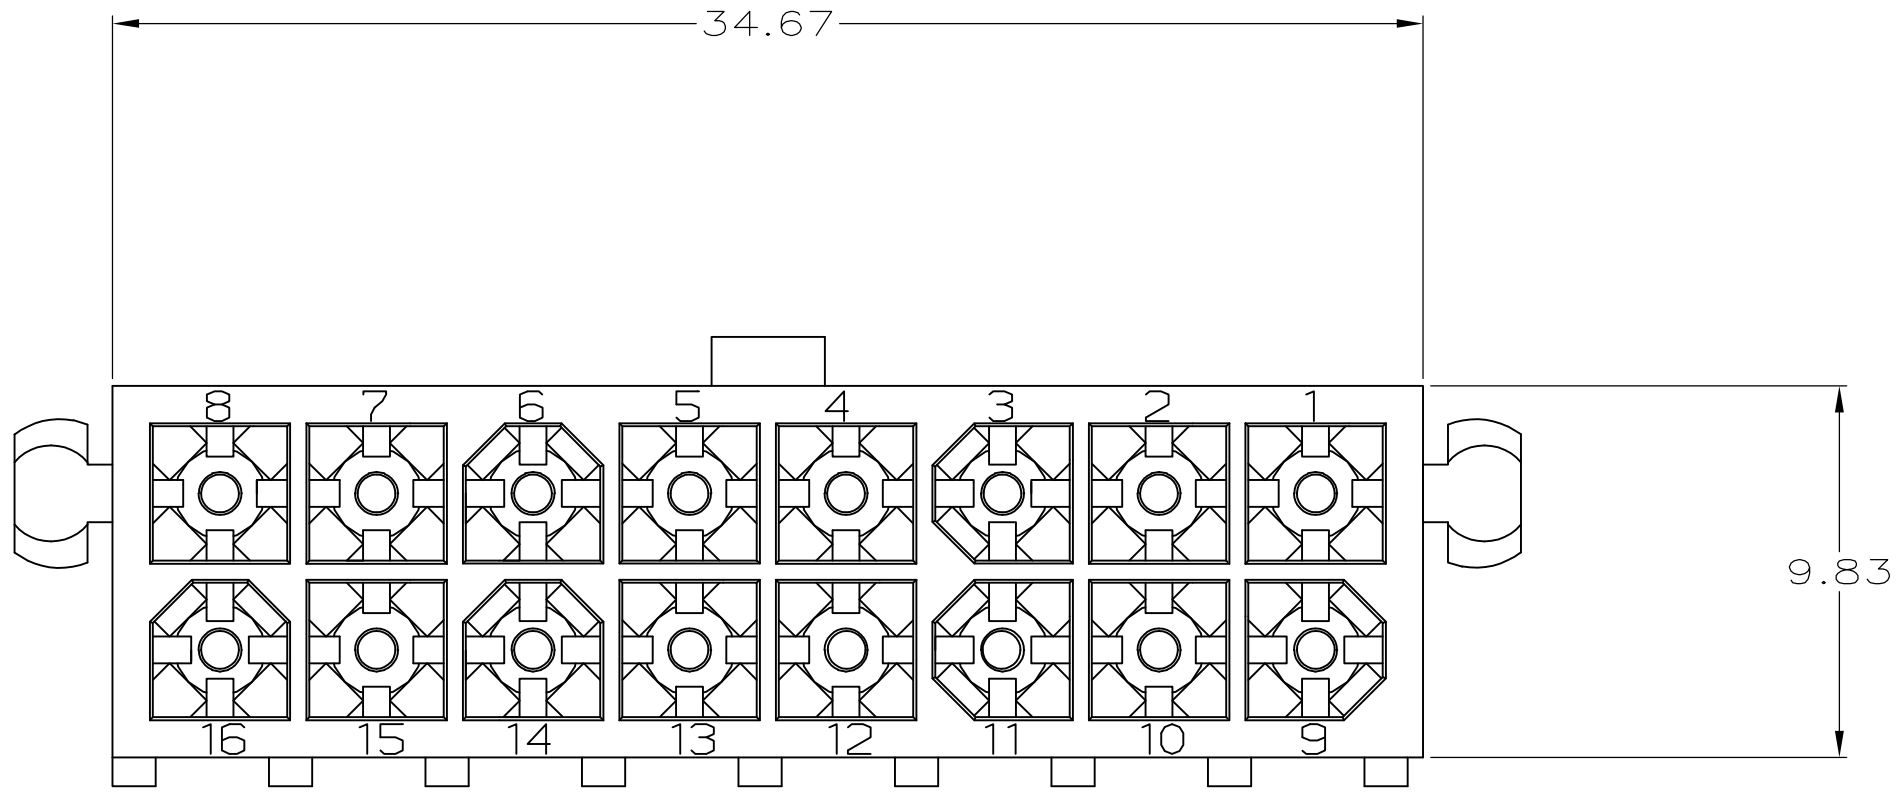

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

0.25	.010	4.14	.163	—	—
0.13	.005	3.68	.145	—	—
0.08	.003	3.17	.125	34.67	1.365
0.051	.0020	1.57	.062	13.49	.531
0.00381	.000150	1.40	.055	9.83	.387
0.00127	.000050	1.000	.0394	5.08	.200
0.00076	.000030	0.76	.030	4.45	.175
MM	IN	MM	IN	MM	IN
CONVERSION TABLE					

BRASS, TIN LEAD △		NYLON,94V-0,DARK RED		1586016-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 05-SEP-2002 CHK C. JONES 05-SEP-2002		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD C. JONES 05-SEP-2002 PRODUCT SPEC		HEADER ASSEMBLY, 16 CIRCUIT, DOUBLE ROW VERTICAL, MINI-UNIVERSAL MATE-N-LOK™	
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE CAGE CODE DRAWING NO. A1 00779 C=1586016	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1 REV A	