



Datenblatt - Fiche technique - Data sheet


11.04.5811



ROLINE DisplayPort Kabel, 4K, DP ST - ST, 2,0 m

ROLINE Câble DisplayPort DP M - DP M, 2,0 m

ROLINE DisplayPort Cable, DP-DP, M/M, 2.0 m

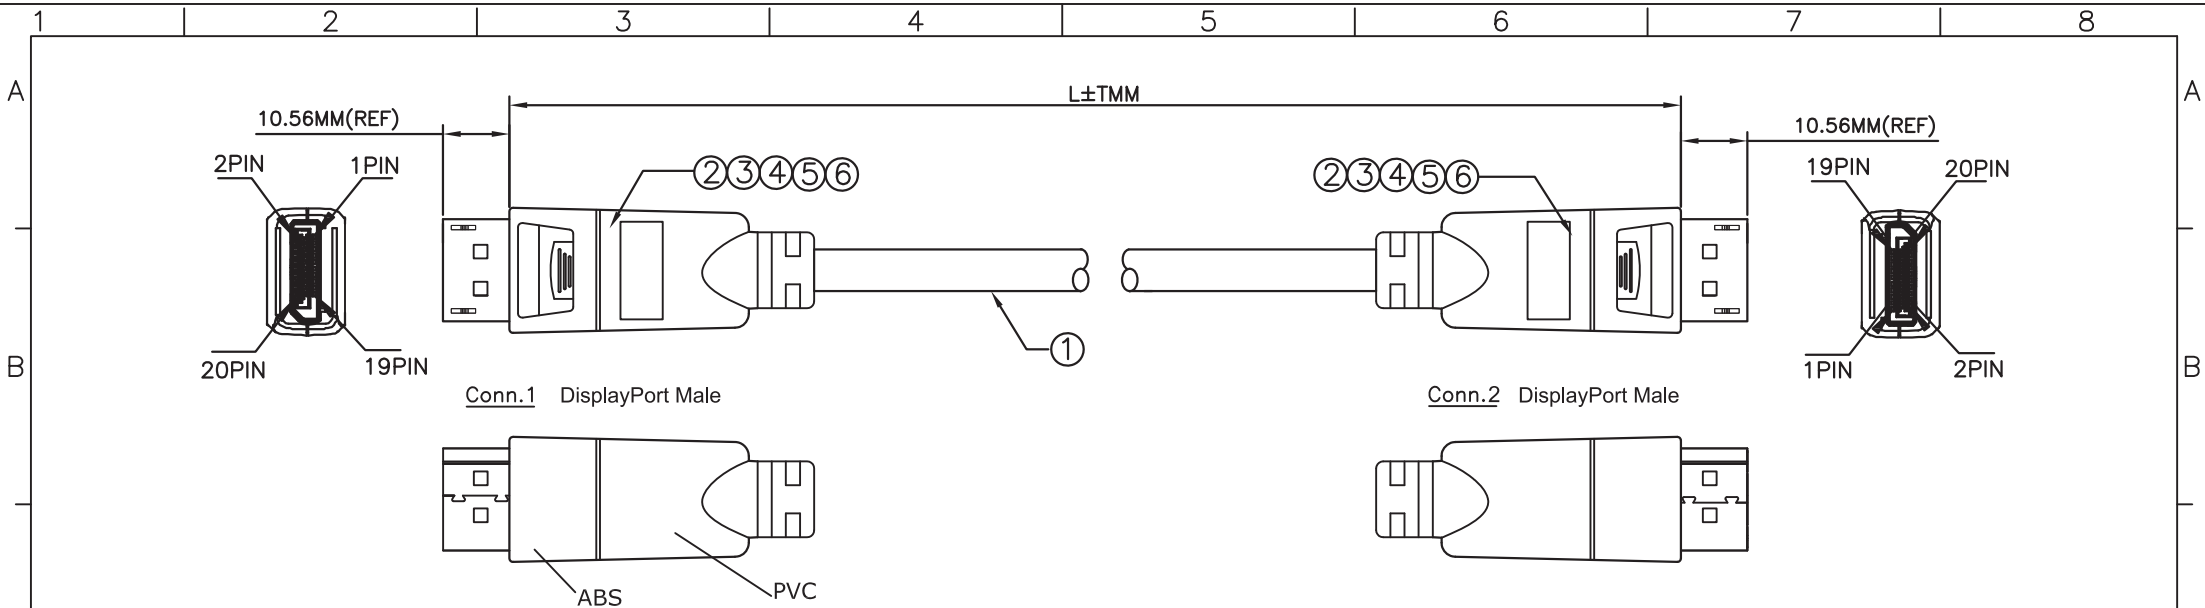

Electrical Test :

- 100% Test(Open, Short, Miss Wire)
- Contact Resistance: 2 ohm Max
- Insulation Resistance: 10M ohm Min
- Hi-Pot: 100V DC/10ms


Table:

P/N	Length
11.04.5810	1000±30mm
11.04.5811	2000±50mm

DESCRIPTION :

- DisplayPort UL20276 [(30AWG*1PR+D+AL/MY)*5+30AW*4C]+AL/MY+BD
OD:6.0MM, Jacket Color: Black
- DisplayPort, Male, Pin: Gold Plated, Insulator: Black, Shell: Gold Plated
- DisplayPort, Shell: ABS, Color: Black
- DisplayPort, Shell: ABS, Color: Black
- Outer Molding: PVC 45P, Color: Black
- Inner Molding: PE

Pin Assignment

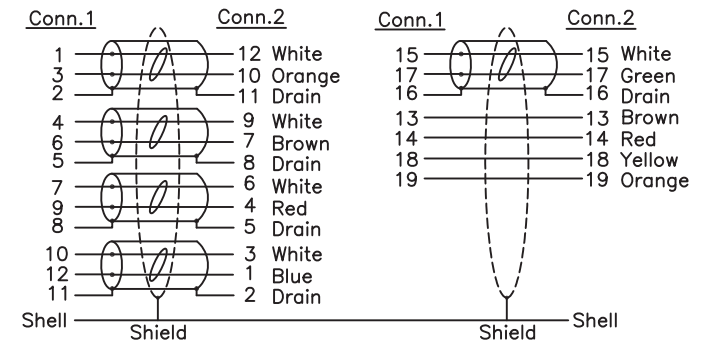

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±	Plc	Met	Ins	Por	Cab	Pac	Gas	DIS	APPROVAL	CHECK	DRAWING	DESIGN	DRAWING NAME	ROLINE DisplayPort Cable v1.3, DP-DP, M/M, Black		
1				RANGE									PHILIP	PHILIP		henry	DATE	PART NO.	11.04.5810 / 11.04.5811	
2				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2					2016-12-05			
3				6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
4				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3								
5				80~180	.15	.15	.25	0.3	2	2	1	.45								
				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1								
													SCALE	1:1	UNIT	MM	SECOMP			