


HONEYWELL
PART NUMBER
BZ-2RQ18M-A2
PRODUCT CODE
ALH1965

REV	DOCUMENT	CHANGED BY	CHECK
4	0059260	SSK 15DEC09	CMH

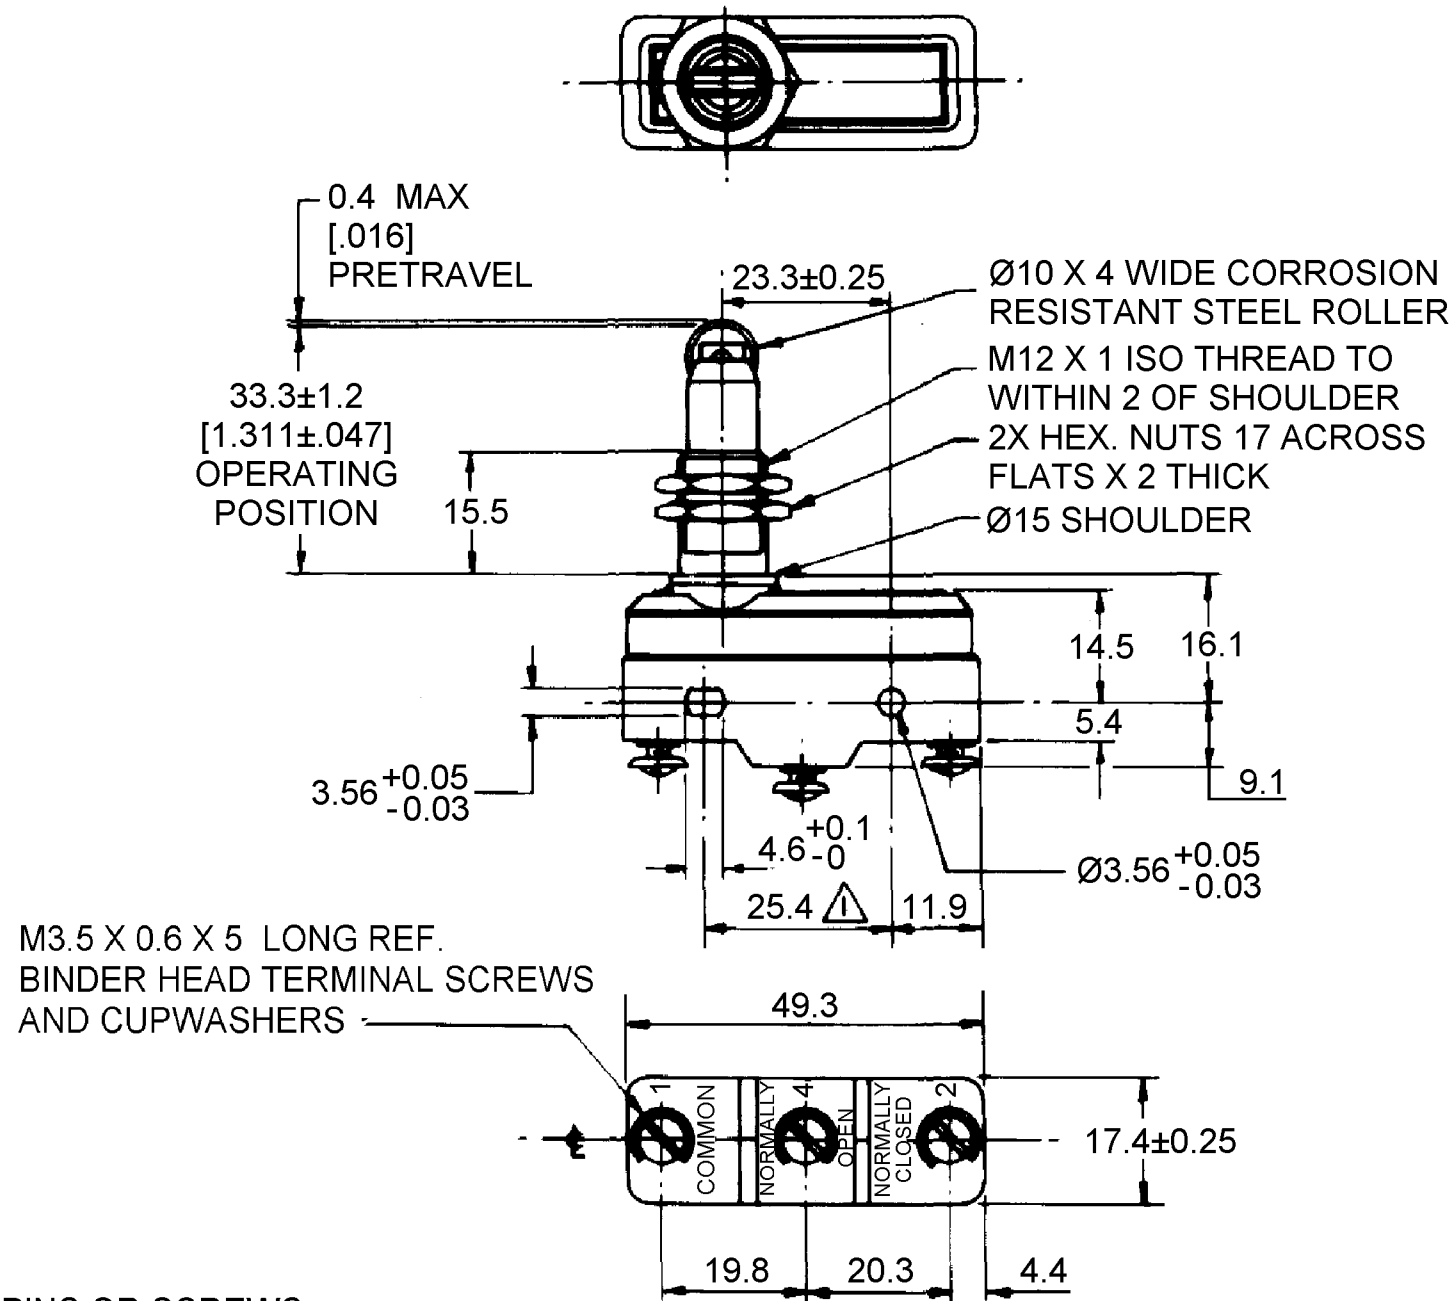

NOTES:

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø3.5 MAX ON 25.4±0.4 CENTRES
- MOUNTING NUTS SUPPLIED UNASSEMBLED

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED:		DRAWN		SSK		15DEC09		Honeywell			
OPERATING FORCE <u>250 - 370g.</u>		CONTACT ARRANGEMENT S.P.D.T.				CHECK		HME		15DEC09					
RELEASE FORCE <u>110g MIN.</u>		L348  15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC  1/2A 125 VDC, 1/4A 250 VDC 16A/250V ~ T85 5E4 μ  		NO PLACES X ± - ONE PLACE .X ± 0.4 TWO PLACE .XX ± - THREE PLACE .XXX ± - ANGLES X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL <u>0.01 - 0.05</u> <u>(.0004 - .0020)</u>															
OVERTRAVEL <u>3.6 / (.142) MIN</u>						INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE	TYPE	CAGE CODE	DRAWING NAME	REV	
						THIRD ANGLE PROJECTION 				RASTER		A3	I	-	BZ-2RQ18M-A2
								SCALE	NONE		SHEET	1 OF 1			