


Y
(Lochbild)
(board drillings)

alle Löcher
all holes

$\phi 1 \pm 0,1$


Position
position

Reihe
row

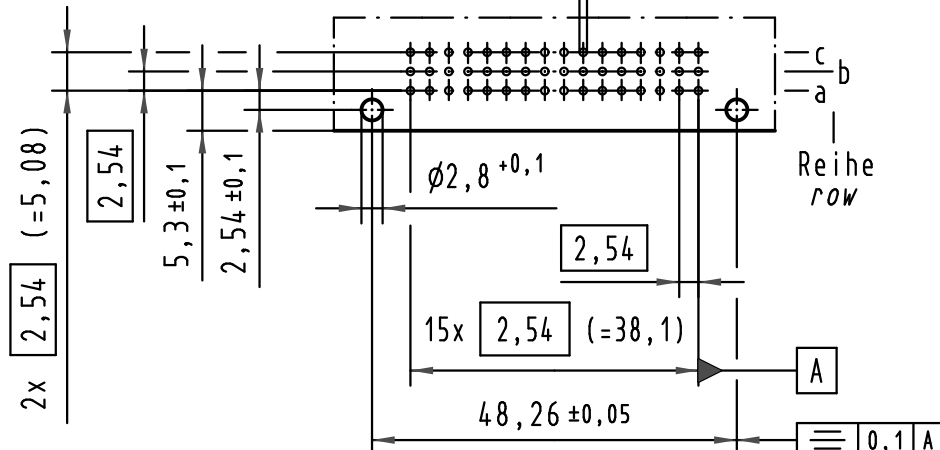


Position
position

Reihe
row

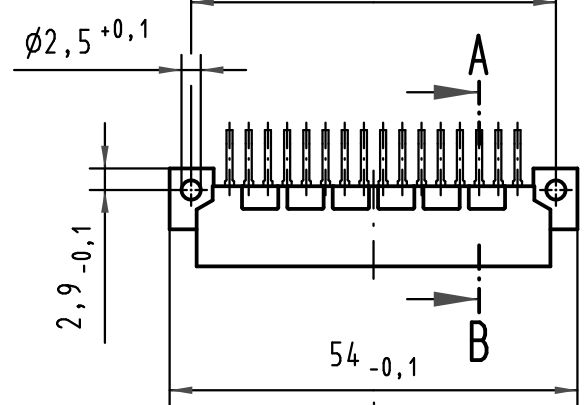


Z
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

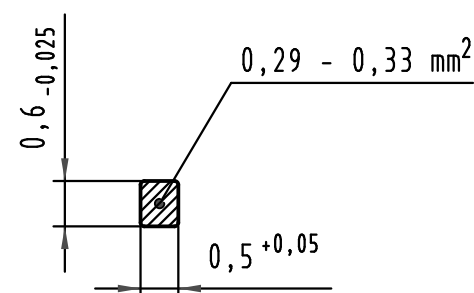


Montageloch-Mittellinie
mounting hole center-line

Referenzebene Tiefe
datum plane depth

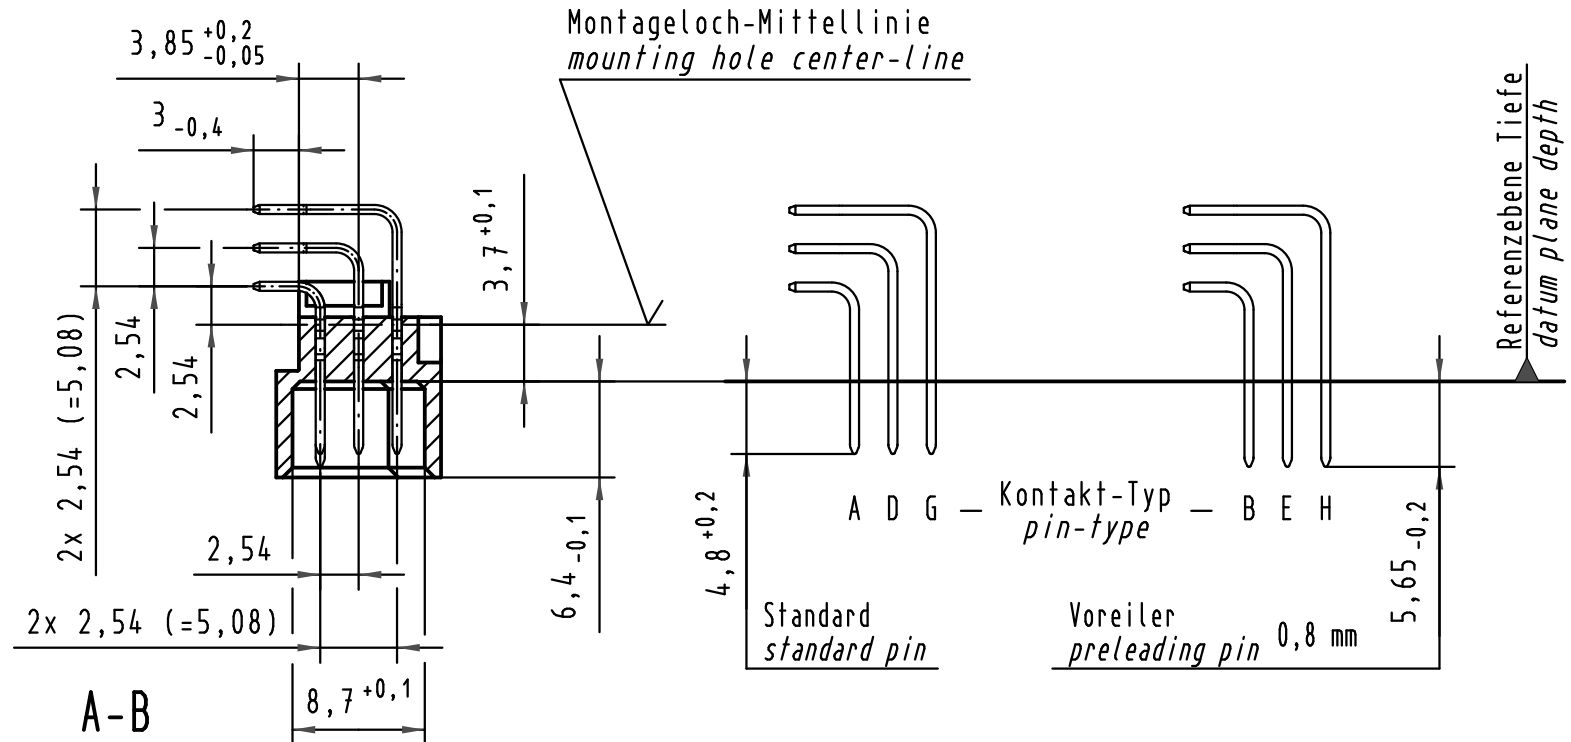


A-B
2:1

X Kontaktbelegung
contact loading

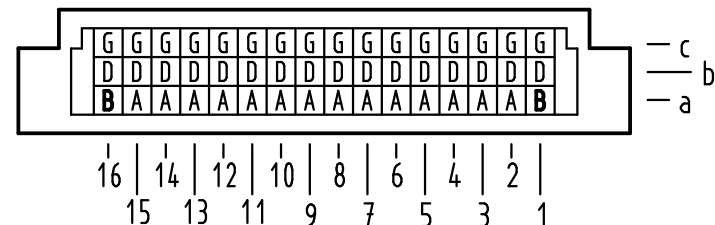

09 23 148 7951	3	Au flash over PdNi over Ni
09 23 148 6951	2	Au flash over PdNi over Ni
09 23 148 2951	1	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating



All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Detail. 31.07.00 Rie.
Insp. 31.07.00 Pa.
Stand.

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



Nicht tolerierte Maße/Free size tolerances
IEC 60603-2

Bauform 2C Messerleiste
Einlöt, 48 pol.
type 2C male connector
solder, 48 pol.

TB 09 23 148 x951

Blatt/ page

Sub.