
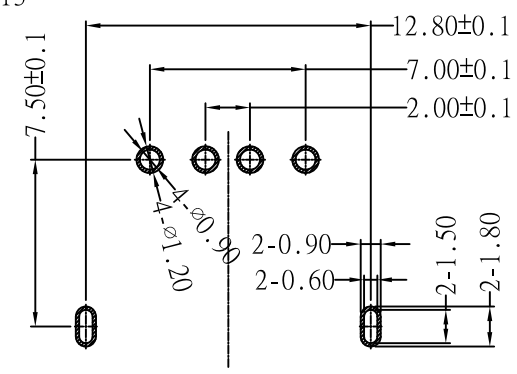
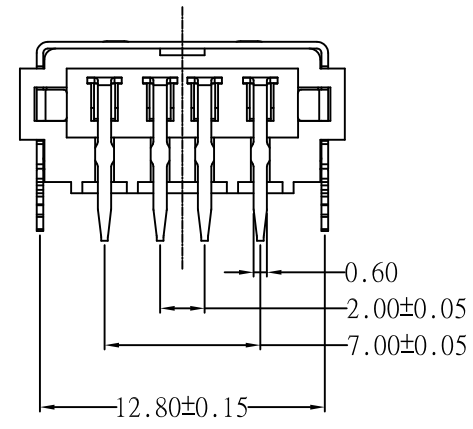
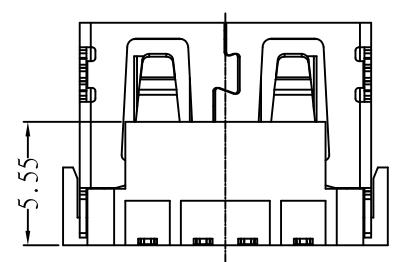
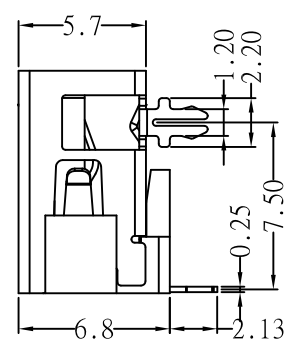
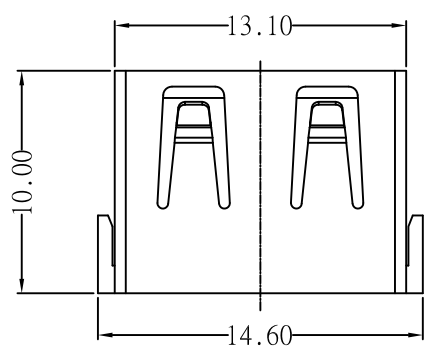



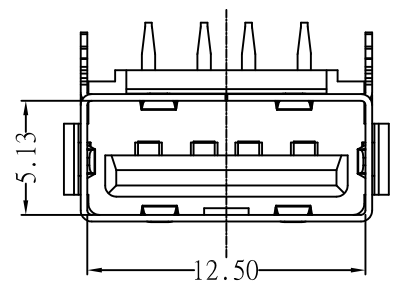

RECOMMENDED P.C.B LAYOUT

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION

FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel

underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Bronze, SPCC,H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: PBT PA9T LCP Black White

4.Environmental:

Operating Temperature: 0°C to +85°C.

908-X X X A X XX X X X XX

01/02=1U 04=3U 07=15U 08=30U

1=氟铜 2=磷铜

D=90度 Y=180度 S=贴板

1=A款6.3 2=A款6.8,

01=白色 02=黑色

1=PBT 2=LCP 3=PA9T

A=正向

1=铁壳24H 2=铜壳24H

5=有边 6=无边 7=有边有缺口

1=前两脚 2=后两脚 3=四脚

产品图			
PRODUCT CHART DWG			
公差一览表			
TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	YANG	制图料号	908-161A1012D10100
UNITS	MM	DRAWING	YANG	PRODUCT PART NO.	908-161A1012D10100
比例	1:1	审核	郭志富	产品名称	AF10.0A款前两脚无边铁壳PBT白胶6.8DIP
SCALE	1:1	CHKD	郭志富	PRODUCT NO.	AF10.0A款前两脚无边铁壳PBT白胶6.8DIP
日期	2019.11.23	核准	黄国荣	角法	角法
DATE	2019.11.23	APPD	黄国荣	VIEW	角法
				版本	AD
				VER	AD