



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

Connector System: **Wire-to-Board**

Number of Positions: **12**

Number of Rows: **2**

Centerline (Pitch): **4.14 mm [.162 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	12
Number of Columns	6
Number of Loaded Positions	12
Connector Contact Load Condition	Fully Loaded
Number of Positions	12
Number of Rows	2
PCB Mount Orientation	Vertical



Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

PCB Retention Feature Material	Nylon
Primary Product Color	White

Contact Features

Contact Size	1mm
PCB Contact Termination Area Plating Material Thickness	3.81 – 8.89 µm[150 – 350 µin]
Contact Layout	Matrix
Mating Pin Diameter	1 mm[.039 in]
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	3.81 – 8.89 µm[150 – 350 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Round
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	9.5 A

Termination Features

Termination Post & Tail Diameter	1 mm[.039 in]
Termination Post & Tail Length	3.69 mm[.145 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Chamfered Edges
Mating Retention	With
Panel Mount Feature	Without
PCB Mount Retention Type	Boardlock
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount



Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With

Housing Features

Mating Entry Location	Top
Housing Material	Nylon
Centerline (Pitch)	4.14 mm[.162 in]

Dimensions

Connector Length	26.39 mm[1.039 in]
Connector Height	13.49 mm[.531 in]
Connector Width	11.88 mm[.468 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Profile Height from PCB	14.25 mm[.56 in]
Row-to-Row Spacing	4.14 mm[.162 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Rating	Recognized
Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 794198-1
12P MINI UMN2 PLUG HSG DBLROW

TE Part # 770581-1
12P MINI UMN1 PLUG HSG

Also in the Series | Mini-Universal MATE-N-LOK

Connector Caps & Covers(2)

Connector Contacts(89)

Connector Hardware(4)


Connector Seals & Cavity Plugs(17)



Connector Strain Relief(2)



Insertion & Extraction Tools(1)

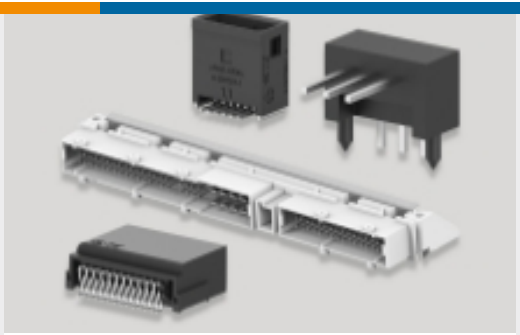


PCB Headers & Receptacles(93)



Rectangular Power Connectors(104)

Customers Also Bought

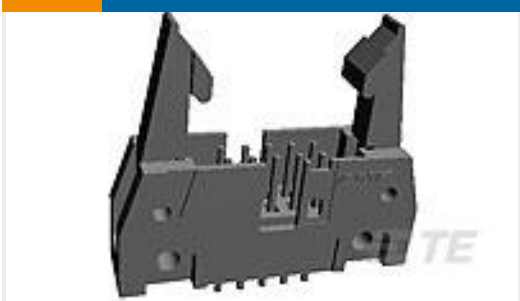

TE Part #5499160-6
A/L UNIV HDR 26P VERT SHT LAT




TE Part #1-794072-1
24P MINI UMNL HDR W/DH AU LF




TE Part #2-1445050-3
MICRO MNL HDR ASSY S/ROW LF



TE Part #770902-4
MINI UMNL SOCK 26-22 AWG SN

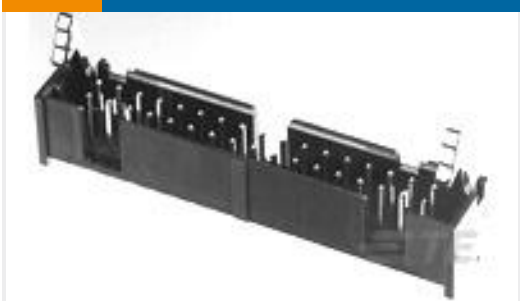


TE Part #1761608-6
IDC LOW PRO HDR 16P VERT SHT LAT BLK

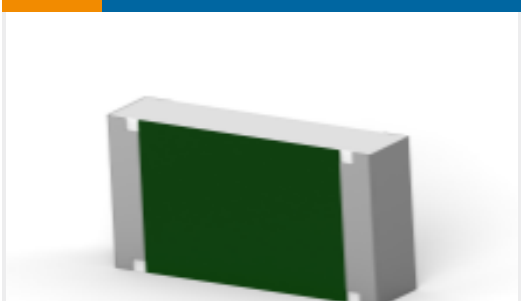

TE Part #2176398-6
3502 22K 1%




TE Part #9-2176380-9
RQ 0805 12K1 0.1% 10PPM 5K RL

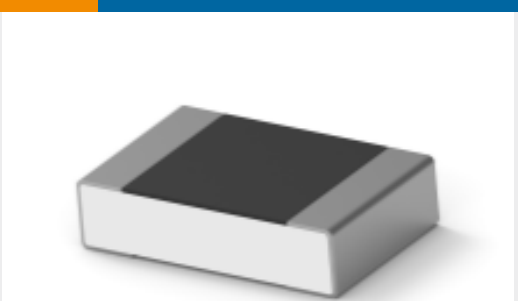

TE Part #5-2176379-6
RQ 0805 402R 0.1% 10PPM 5K RL



TE Part #1971845-8
8P, RAST 5 Tab Header, THV

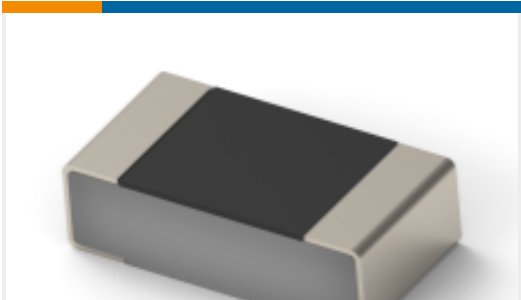

TE Part #2176467-4
TLRP 1206 1.0W R015 1% 50PPM 5K RL

Documents

Product Drawings

12P MINI UMNL DBL ROW HDR ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-770621-0_M.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1-770621-0_M.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-770621-0_M.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[UL](#)

English