
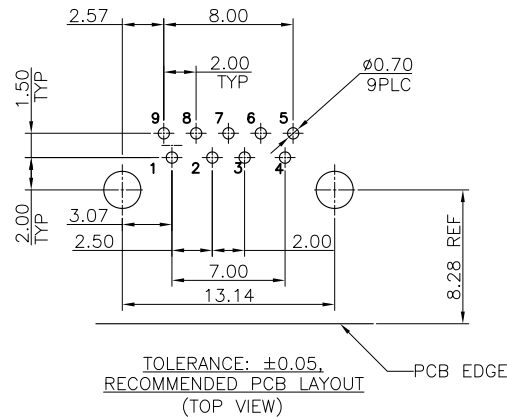
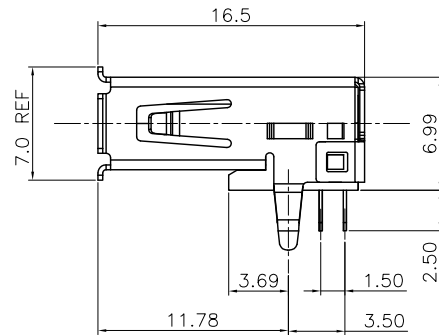
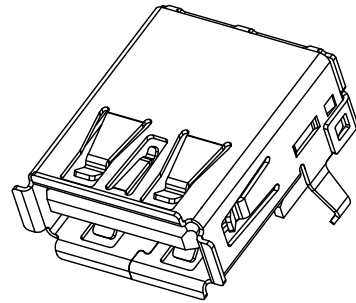
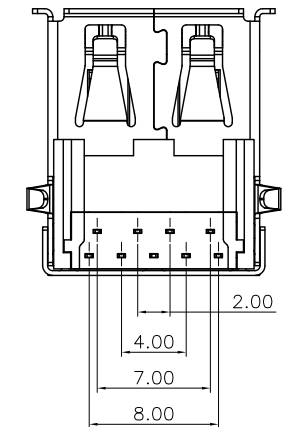
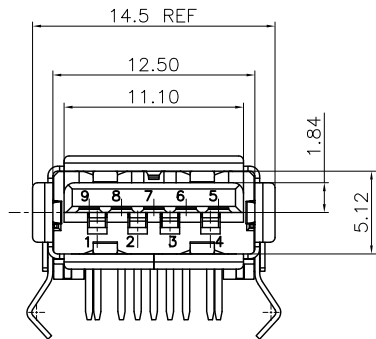


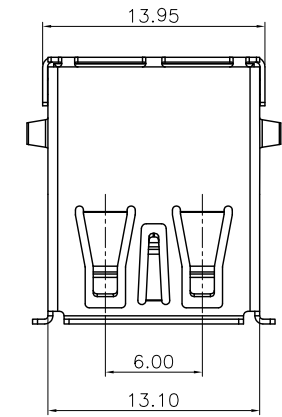

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnc Withstanding Voitage:
500 V AC AT Sea Levol
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Thermaplastics,
U1 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

 深圳市万骏达电子有限公司 http://www.wanjunda.com	图号 (DWG NO)	单位 (UNIT): MM
品名 (ITEM NO)	USB 3.0, A TYPE, R/A,DIP,CONNECTOR.短翻边	比例 (SCALE) 1:1
料号 (PART NO)	USB3.0-AF-WCS-JB	设计 (DESIGN)
模号 (MODEL NO)		审核 (CHECKED)
		核准 (APPROVED)
		未注公差 TOLERANCE UNSPECIFIED
		X.X ±0.30
		X.XX ±0.15
		X.XXX ±0.10
		X" ±5°
		X.X" ±2°