

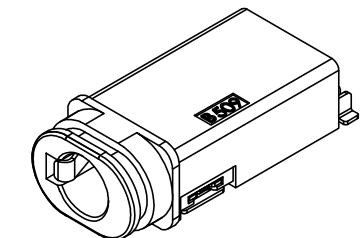

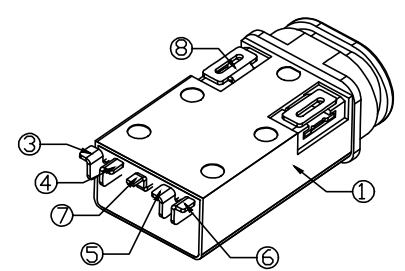
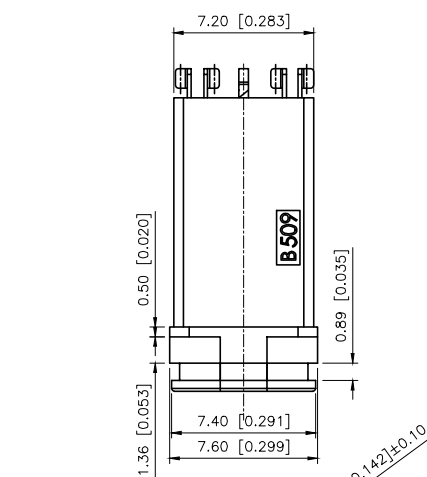
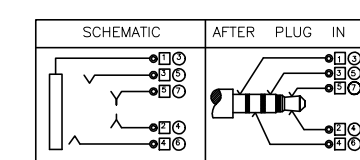
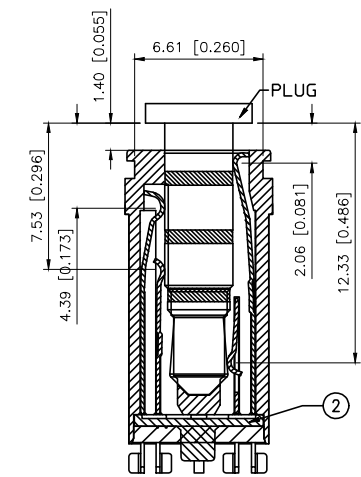
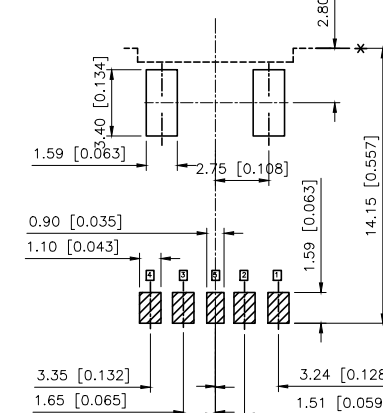
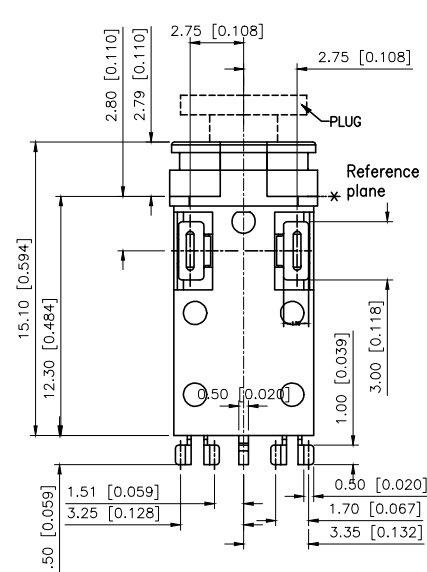



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.27	阿树

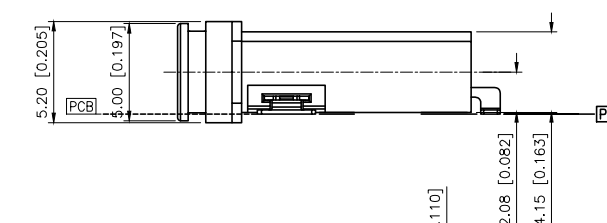

- SPECIFICATIONS:
- 1.INSULATION RESISTANCE: 1F 500V DC SHALL BE APPLIED TO THE TERMINALS.AFTER WHICH MEASUREMENT SHALL BE MADE A CAUSE FOR THE MEASUREMENT SHALL BE USED THE INSULATED GALCE
 - 2.CONTACT RESISTANCE:30mA OR LESS
 - 3.VOLTAGE:PR11E500V AC FOR ONE MINUTE
 - 4.DURABILITY:5,000 INSERTION/REMOVAL CYCLES(MINIMUM)
 - 5.INSET IN F1RCE:D.3KGFN3.0KGF
 - 6.WITHDRAWAL FORCE:0.3KOF-3.0KOF
 - 7.WATER PROOFNESS:THIS PRODUCT IS CONFORM TO JIS STANDARD IPX7 BY WATERPROOF JACK
 - 8.USING PLUG:43.5MM. 4-POLE STEREO EARPHONE LCH/RCH/GND/MIC
 - 9.0-RING ASSEMBLY AREA TO MAINTAIN SMOOTH. SHALL HAVE NO BURRS



□: TERMINAL NO ○: ITEM NO

⑨	Bond		1	Copper alloy t=0.2
⑧	Terminal			Ti-Cu t=0.2
⑦	Tip Spring-2	5	1	Ti-Cu t=0.2
⑥	Ring Spring-2	4	1	Ti-Cu t=0.2
⑤	Ring Spring-1	3	1	Ti-Cu t=0.2
④	Tip Spring-1	2	1	Ti-Cu t=0.2
③	Earth Spring	1	1	Ti-Cu t=0.2
②	Cover		1	PA9T(BLACK)
①	Housing		1	PA9T(BLACK)
No.	PART NAME	Terminal	QTY	MATERIAL(THICK)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCE	±0.05



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	PART NO.:
APPROVED		SIZE: A4	DWG NO.:
			3.5 PHONE JACK
			PJ-3255B