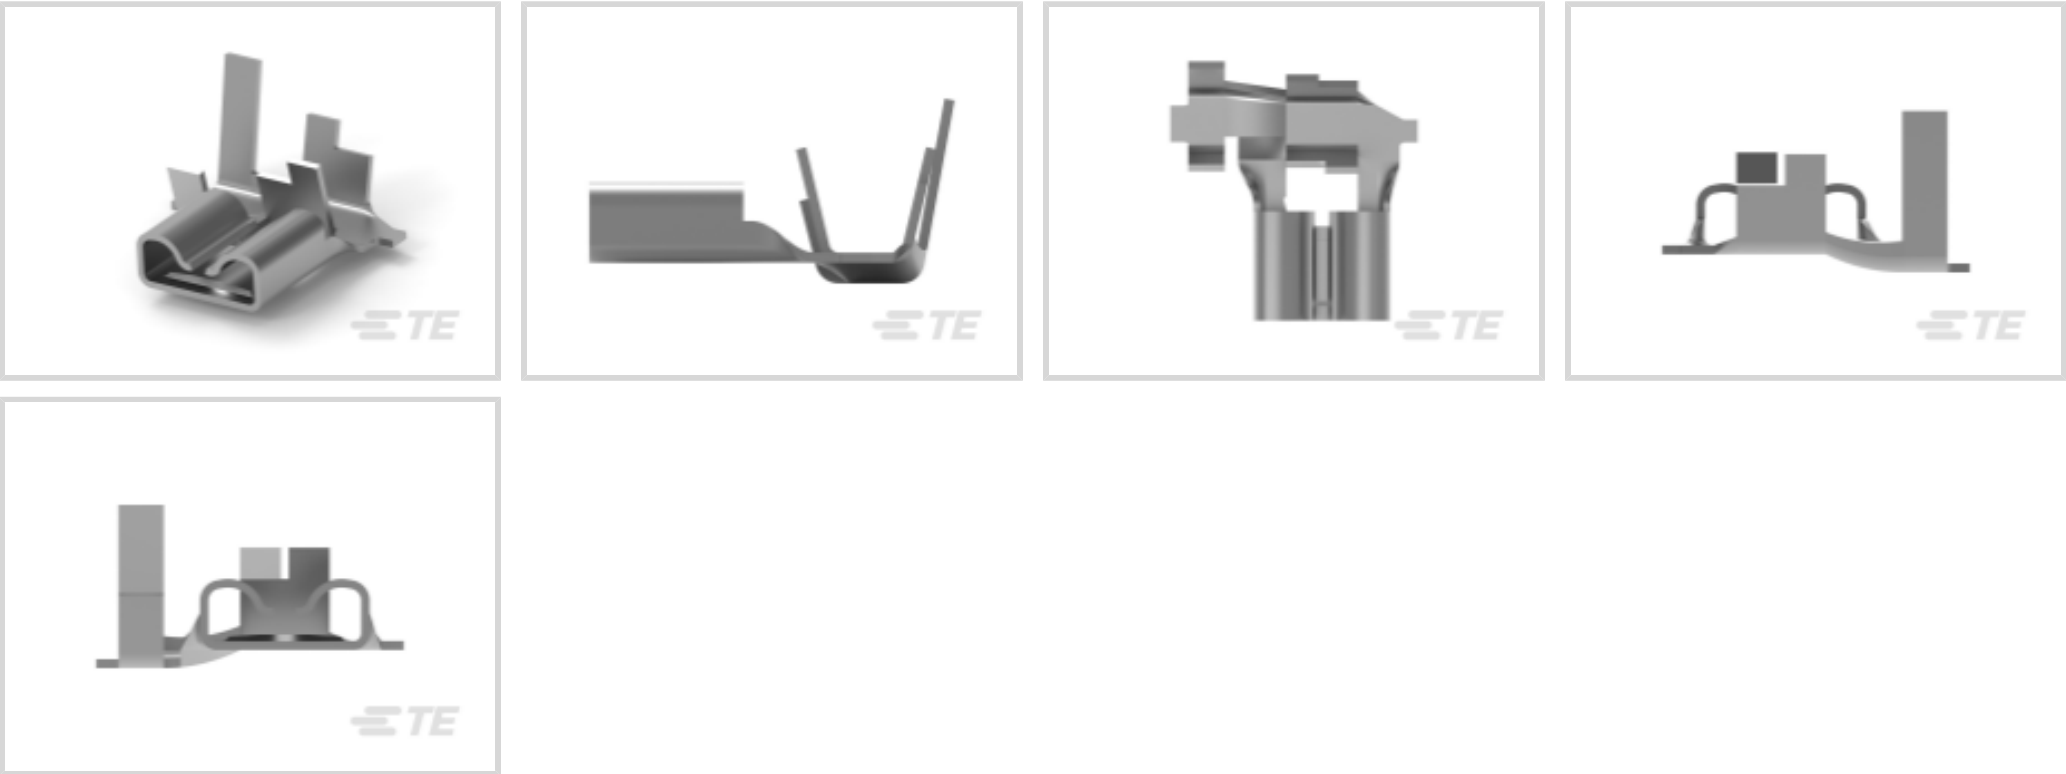




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1600 – 6500 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Connection Capacity	Single
Compatible With Wire & Cable Type	Discrete Wire

Electrical Characteristics

Voltage Rating	600 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Tab-Lok
Barrel Type	Open



Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Compatible Insulation Diameter Range	2.79 – 5.33 mm[.11 – .21 in]
Wire Size	1600 – 6500 CMA

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 125 °C[-49 – 257 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
Compatible With Approved Standards Products	UL E66717

Packaging Features

Packaging Quantity	3500
Packaging Method	Reel/Carton

Other

Line	FASTON .250
------	-------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free




Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

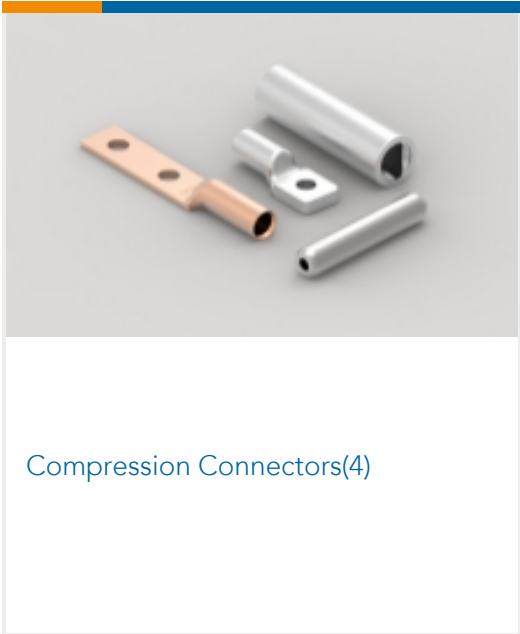
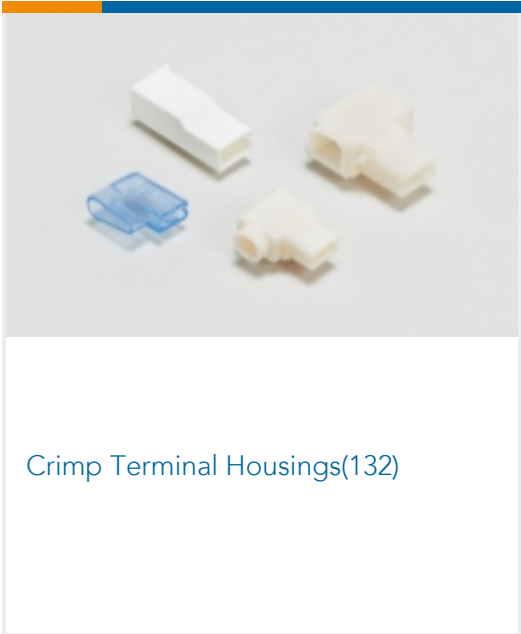
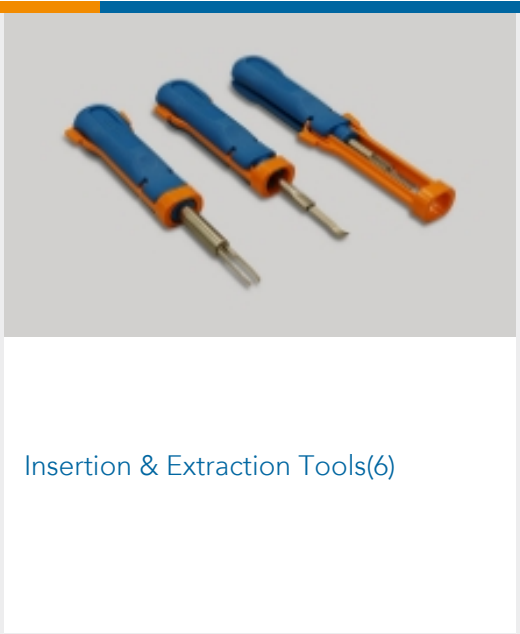
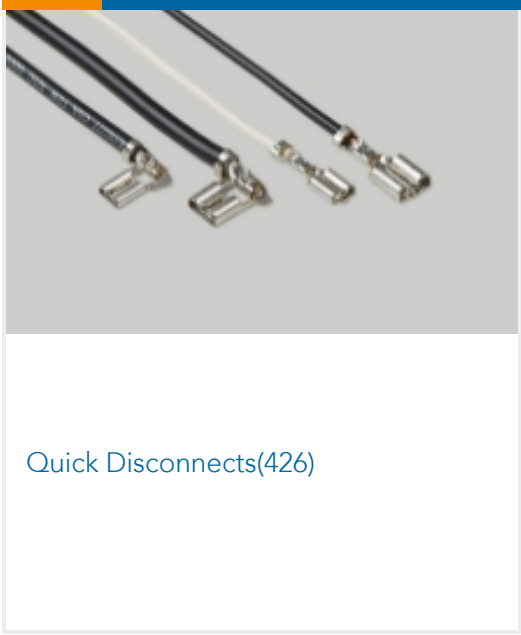
 TE Part # CAT-SCH691-T1 PCB Power Relay: 30 Amp, Monostable DC	 TE Part # 1-1649341-7 T9CP5A54-24	 TE Part # 1649341-2 T9CP1A54-240	 TE Part # 1-1649341-9 T9CP5A54-120
 TE Part # 5-2425506-1 HSG, RECEP, 250 FASTON LH FLAG, 3P, T9A	 TE Part # 5-2425507-2 HSG, RECEP, 250 FASTON LH FLAG, 2P, T9A	 TE Part # 2-1649341-5 T9CP2A54-120	 TE Part # 1649341-5 T9CP1A52-120
 TE Part # 1649341-8 T9CP1A54-24	 TE Part # 1-1649341-2 T9CP5A52-24	 TE Part # 2-1649341-0 T9CP5A54-240	 TE Part # 2238142-1 250 FASTON, FLAG, REC., 22-16 AWG, NPST



 TE Part # 1649341-6 T9CP1A52-240	 TE Part # 1-1649341-0 T9CP1A54-120	 TE Part # 1-1649341-4 T9CP5A52-120	 TE Part # 1-1649341-5 T9CP5A52-240
 TE Part # 1969900-1 250 FASTON HSG., FLAG, REC., 2 POS, NATURAL	 TE Part # 2238271-1 HSG, RECEP, 250 FASTON FLAG, 2P, T9G	 TE Part # 4150013-1 OCEAN-2.0-APPLICATOR-E-130SP160O-SEM	 TE Part # 4150013-2 OCEAN-2.0-APPLICATOR-E-130SP160O-SEA

Also in the Series

FASTON 250

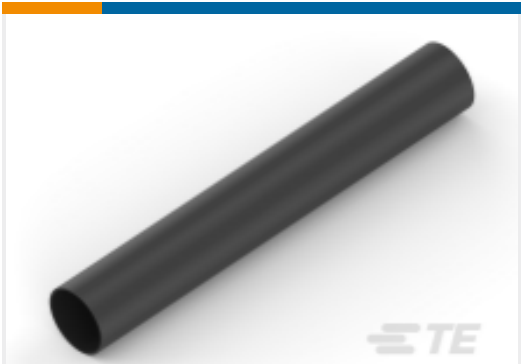
 Compression Connectors(4)	 Crimp Terminal Housings(132)	 Insertion & Extraction Tools(6)	 Magnet Wire Terminals(1)
 PCB Terminals(134)	 Quick Disconnects(426)	 Splices(4)	

Customers Also Bought

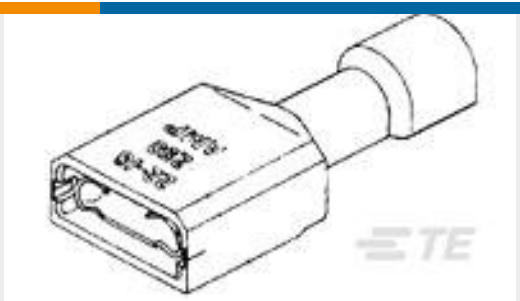
 TE Part #5-1393211-7 T92P7A22-120	 TE Part #52937-1 TERMINAL,PIDG SPR SPD 16-14 10	 TE Part #52420-3 TERMINAL,PIDG SPR SPD 16-14 6	 TE Part #42400-2 250 FASTON REC 18-14 AWG TPBR
--	---	---	---



TE Part #A81736-000
RNF-100-MINI-SPL-1/2-BK



TE Part #NB25822001
SCL Heat Shrink Tubing



TE Part #5-520183-2
ULTRA-FAST 250 ASY REC 22-18 AWG TPBR



TE Part #60635-1
250 FASTON REC 14-10 AWG TPBR



TE Part #465468-1
INSERTION TOOL TIP

Documents

Product Drawings

250 FASTON,FLAG,REC.,22-12 AWG,PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2238209-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2238209-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2238209-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English