


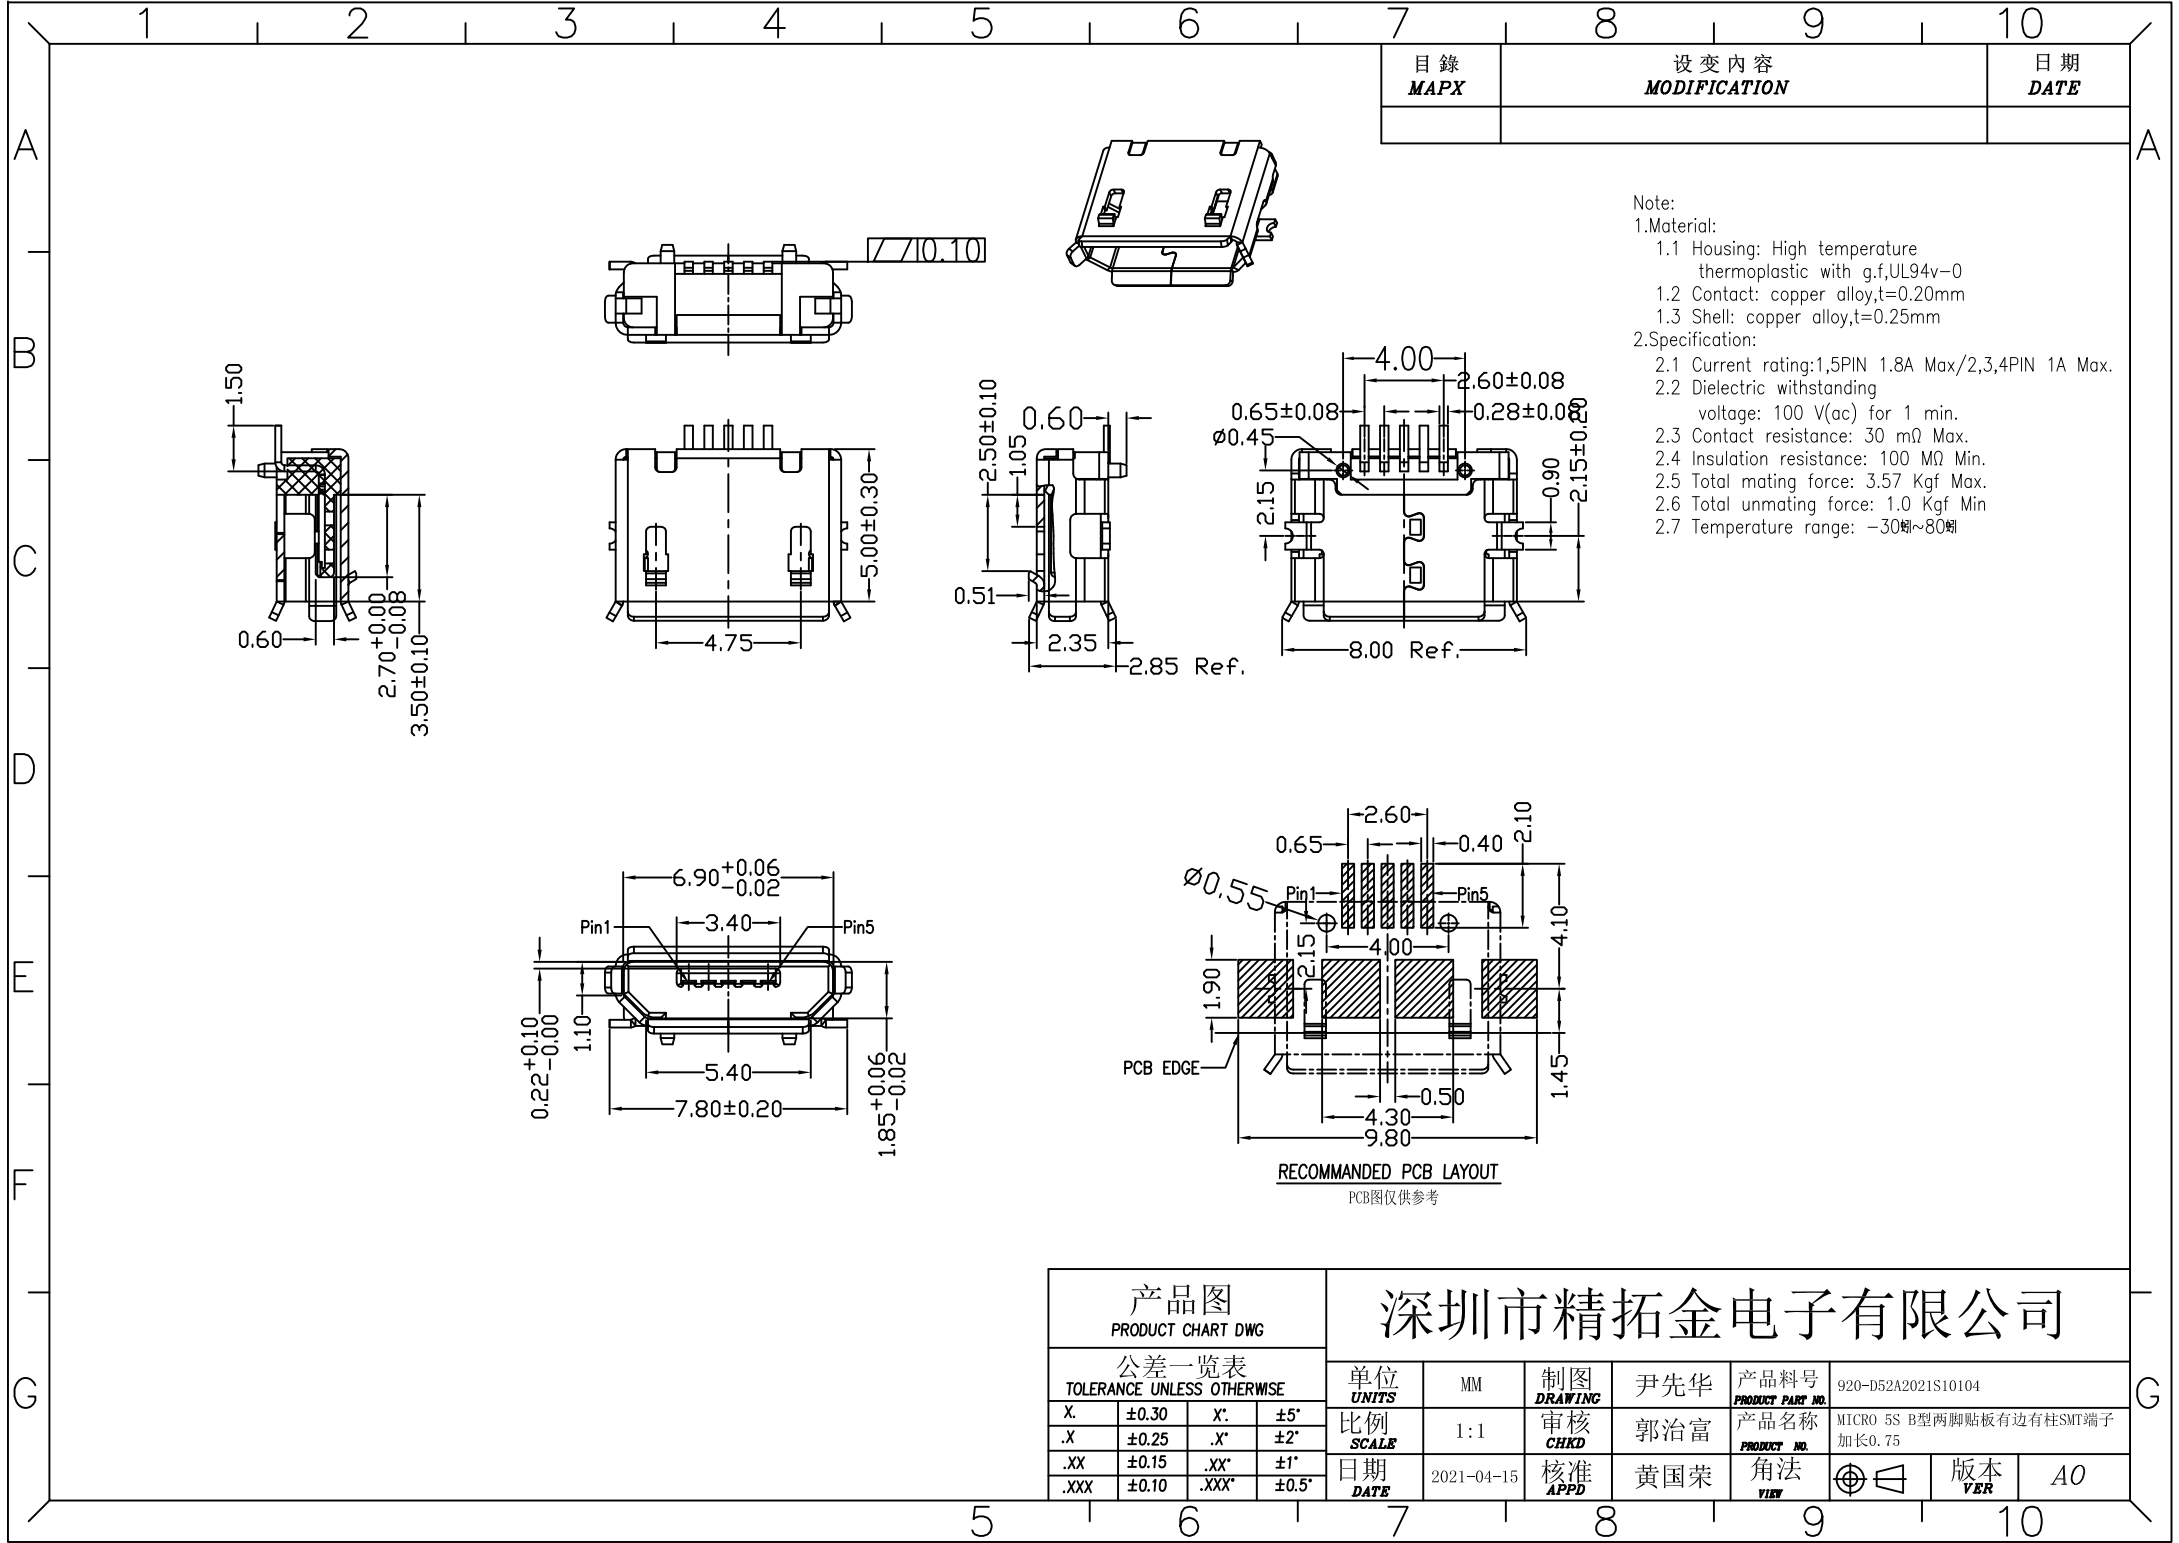

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

- Note:
- 1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm
- 2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min
- 2.7 Temperature range: -30℃~80℃

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	尹先华	产品料号 PRODUCT PART NO.	920-D52A2021S10104		
X.	±0.30	X'.	±5°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO 5S B型两脚贴板有边有柱SMT端子 加长0.75
.X	±0.25	.X'.	±2°	日期 DATE	2021-04-15	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.15	.XX'.	±1°					版本 VER	A0
.XXX	±0.10	.XXX'.	±0.5°						