
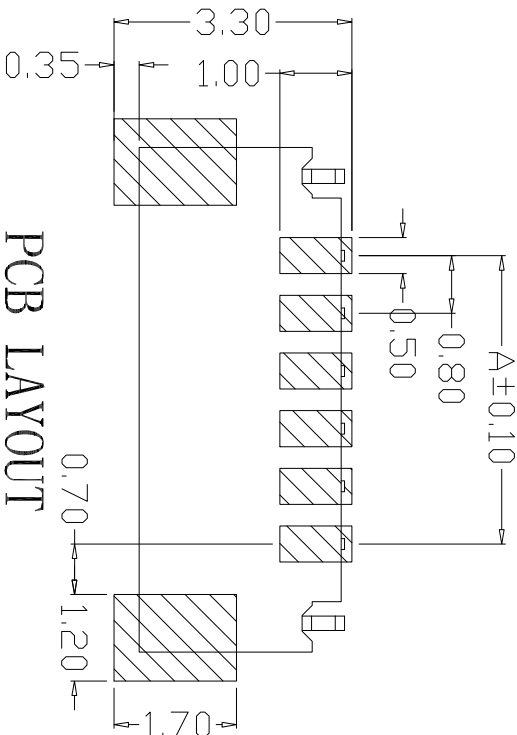
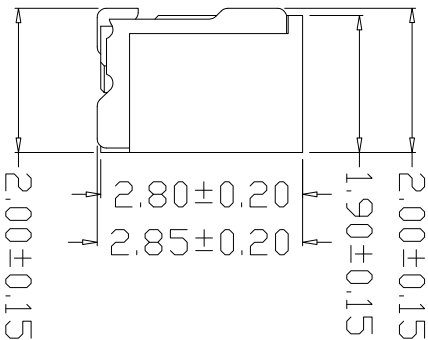


RoHS

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
 - 2、Voltage Rating: 30V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 30mΩ Max
 - 5、Insulation Resistance: 100MΩ Min
 - 6、Withstanding Voltage: 200V AC/minute
 - 7、Material: Wafer LCP, UL94V-0
- PIN Brass Tin-plated
Solder tad Phosphoric bronze/tin-plated

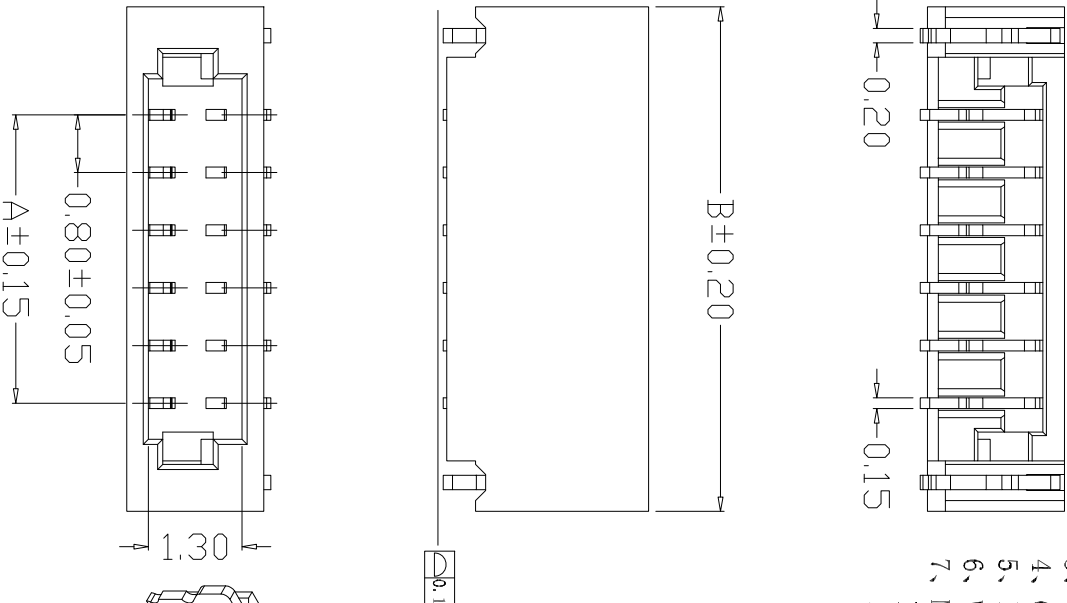

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A0800-02AWB	0.80	3.80
A0800-03AWB	1.60	4.60
A0800-04AWB	2.40	5.40
A0800-05AWB	3.20	6.20
A0800-06AWB	4.00	7.00
A0800-07AWB	4.80	7.80
A0800-08AWB	5.60	8.60
A0800-09AWB	6.40	9.40
A0800-10AWB	7.20	10.20
A0800-11AWB	8.00	11.00
A0800-12AWB	8.80	11.80
A0800-20AWB	15.20	18.20



X. ± 0.5

X. ± 0.30

. XX ± 0.20

. XXX ± 0.005, XXX ±

单位	mm
比例	
SCALE	
核准:	版本: A0
APPORVED BY	Production name
审核:	页次: 1/1
CHECKED BY	Product No
制图:	日期:
DRAWN BY	客户料号
	Client No

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

F

E

D

C

B

A

F

E

D

C

B

A

版本	变更原因	变更日期
1.0	CHANGE COMMENT	TH00000000

1

2

3

4

5

6

7

8

2

2

3

3

4

4

5

5

6

6

7

7

8

8