
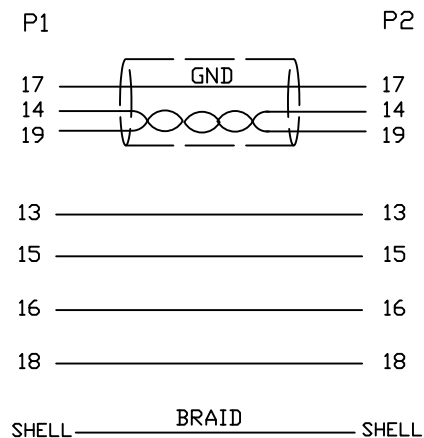


1.Wiring Diagram.

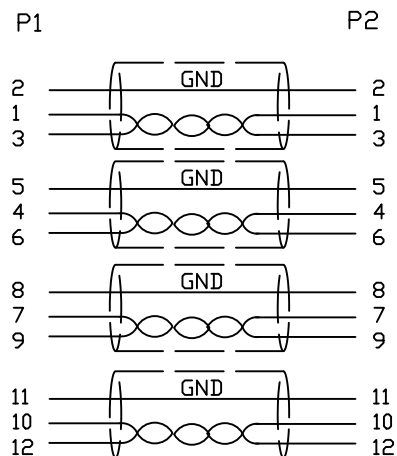

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE polybag.

4.For HDMI 2.0Ver.and Support Resolution ratio 3840x2160(4k)

And 60fps frame rate

5	COPER	W20MM*L35MM	2		B	ADD COPPER	2021/2/28
4	PVC	45P PVC BLACK OVERMOLD	25g		A	INITIAL RELEASE	2014/11/12
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g		REV	ECN	DESCRIPTION
2	CONN	HDMI A TYPE MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK	2	P1.P2			DATE
1	CABLE	UL20276 《26AWG (7/0.16TC) *1P+D+EA+AL/MY》 *5P+26AWG (1/0.16TC) *4C +AEM(16/8/0.12AM) OD8.5 BLACK HDMI2.0V.	1	10M			
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	CnC Tech,LLC		
BILL OF MATERIAL					HDMI A/M TO HDMI A/M CABLE		
					DWN NO.	740-10012-01000	REV B
					DRAWN	EDWINLAI	DATE 2/28/21
					CHECKED	Win.C	DATE 2/28/21
					APPROVAL		
					CUSTOMER P/N:		REV
					CUSTOMER:		
					SHEET 1 OF 1		