
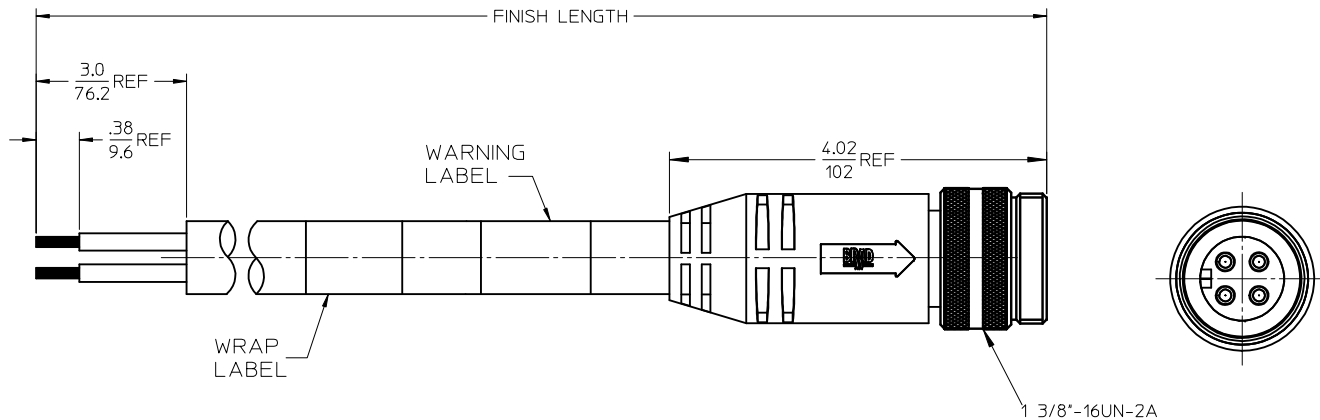


13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300630042	C03006A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300630150	C04006A48M020	32	2M +89-0MM (6'7"+3.50-0)								

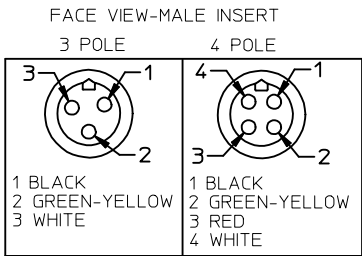

SPECS:
OVERMOLD: GRAY PVC W/BLACK STRIP
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & ST00W
ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRWNG:GUSTAFSON 2013/12/23 CHKD:VOU 2014/01/15 APPR:BWOODMAN 2014/05/12	REV B	DESCRIPTION ▽=0 ▽=0	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY B.RUPERT		DATE 01/12/2010	TITLE QUICK CHANGE MALE STRAIGHT 3 & 4 POLE PORTABLES		
				4 PLACES	± ---	± ---	CHECKED BY B.WOODMAN		DATE 01/12/2010			
				3 PLACES	± ---	± .005	APPROVED BY JFMURPHY		DATE 2010/01/15			
				2 PLACES	± 0.13	± .010	MATERIAL NO.		DOCUMENT NO.	SHEET NO.		
				1 PLACE	± 0.25	± .020	SEE CHART		SD-130063-042		1 OF 1	
ANGULAR ±1/2°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1300630160