

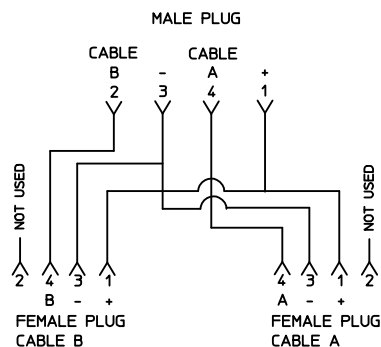


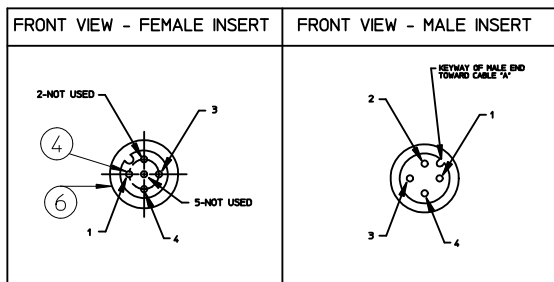

VOLTAGE RATING:	300V
AMPERAGE RATING:	max. 4A
PROTECTION CLASS:	IP 68
OPERATING TEMPERATURE:	FLEXING -5°C TO +80 °C STATIC -30 °C TO +80 °C

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	ULTRA-LOCK	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au OVER Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE #22	PVC	YELLOW

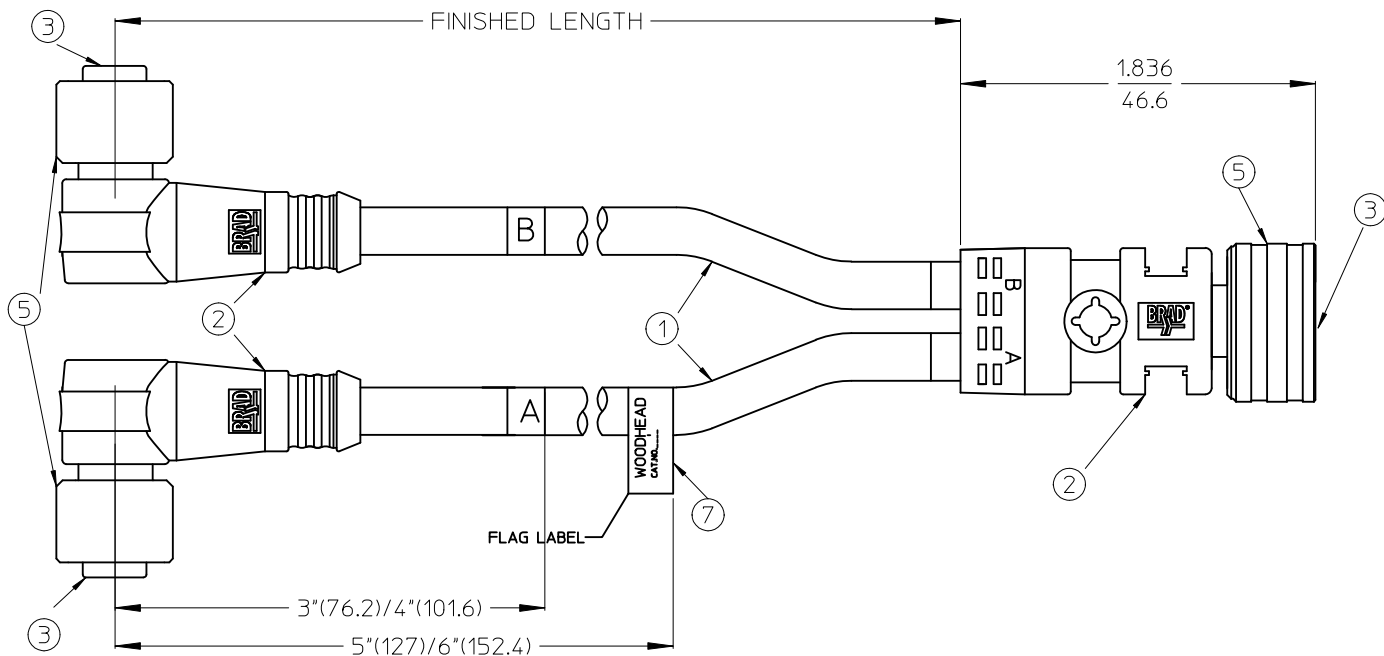

1200800040	8W4A31A09M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200800039	8W4A31A09M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200800038	8W4A31A09M006	1.97' +1.75" -0 [0.6M +44.5 -0]
1200800037	8W4A31A09M003	0.98' +0.75" -0 [0.3M +19.1 -0]
MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH

ENTER DESCRIPTION EC NO: WEU2010-0333 DRWN: APOHL WEU 2010/02/10 CHKD: REISSNER 2010/02/11 APPR: FPACHER 2010/02/25 1		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY APOHL WEU	DATE 2010/02/10	TITLE MIC INL. SPLITTER XM PVC 90 DEGREE				
				4 PLACES	± ---	± ---	CHECKED BY REISSNER					DATE 2010/02/11
				3 PLACES	± ---	± ---	APPROVED BY FPACHER	DATE 2010/02/24	MOLEX INCORPORATED			
				2 PLACES	± ---	± 0.1	MATERIAL NO. SEE NOTES					
1 PLACE		± 0.3	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200800037