


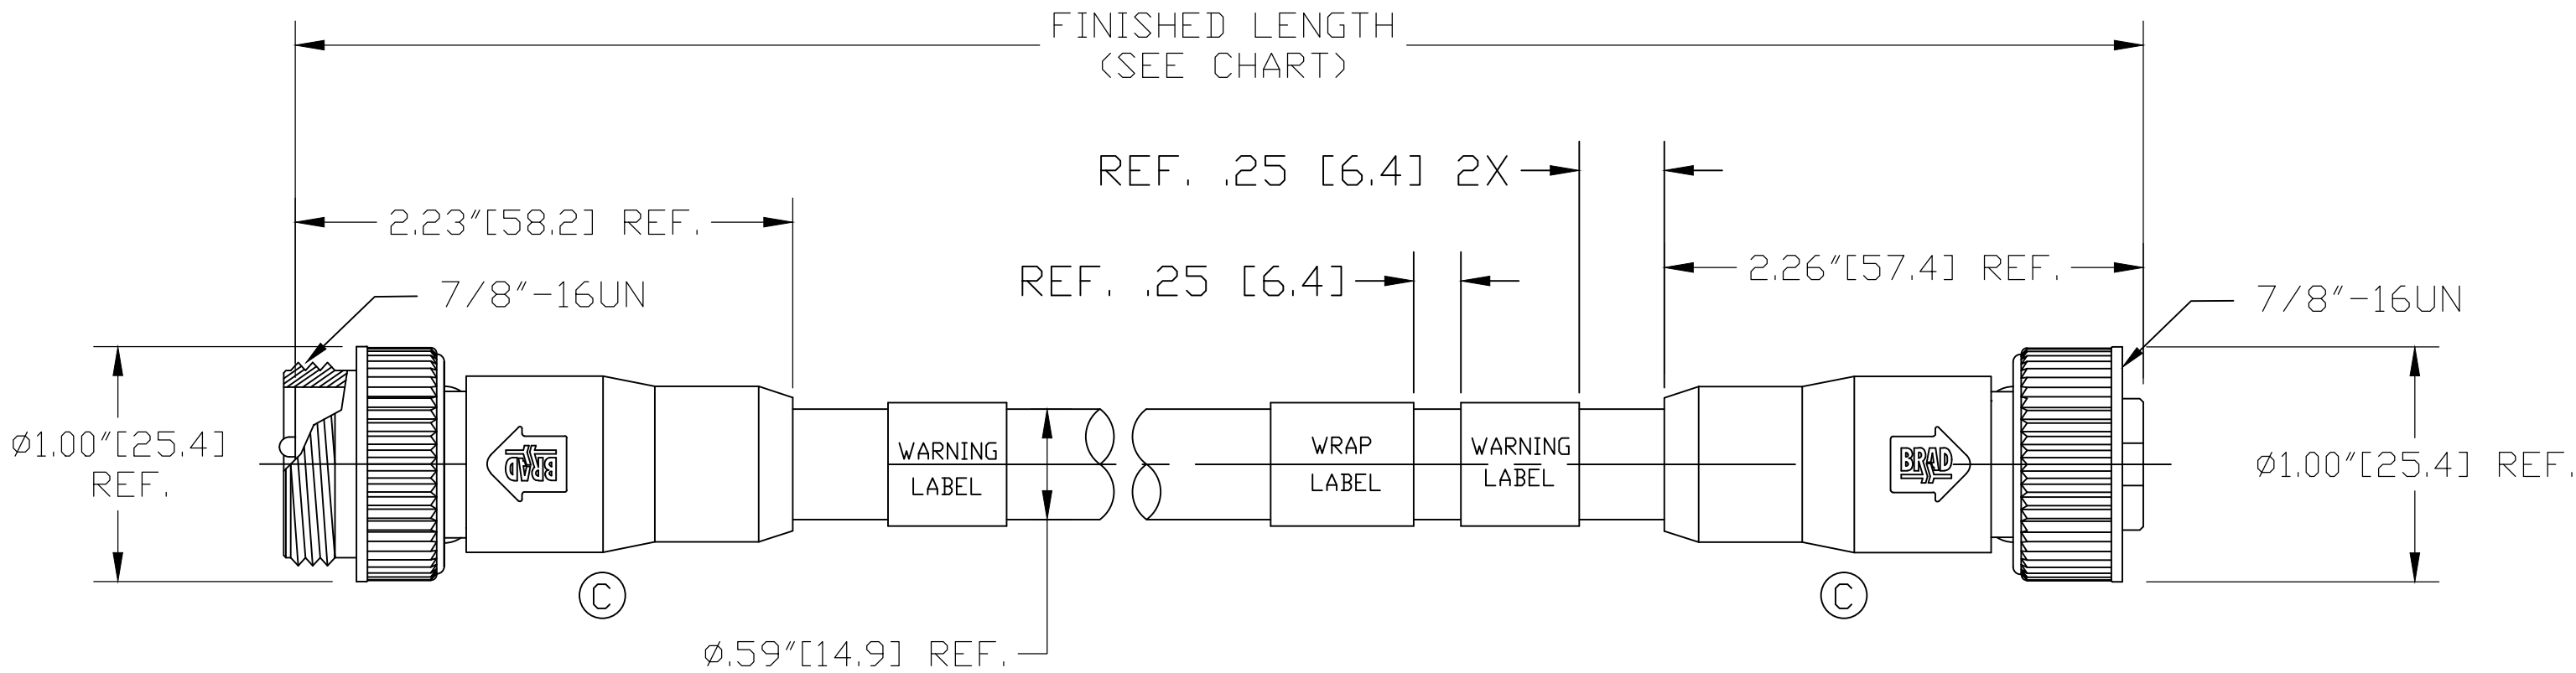

1	BLACK	1
2	WHITE	2
3	RED	3
4	GREEN/YELLOW	4



WIRING DIAGRAM

114030A46M020

Cable type
14/4 AWG TC/STOOD
Gray PVC

cable length
M020----2 Meter
M100----10 Meter

PART NUMBER MATRIX

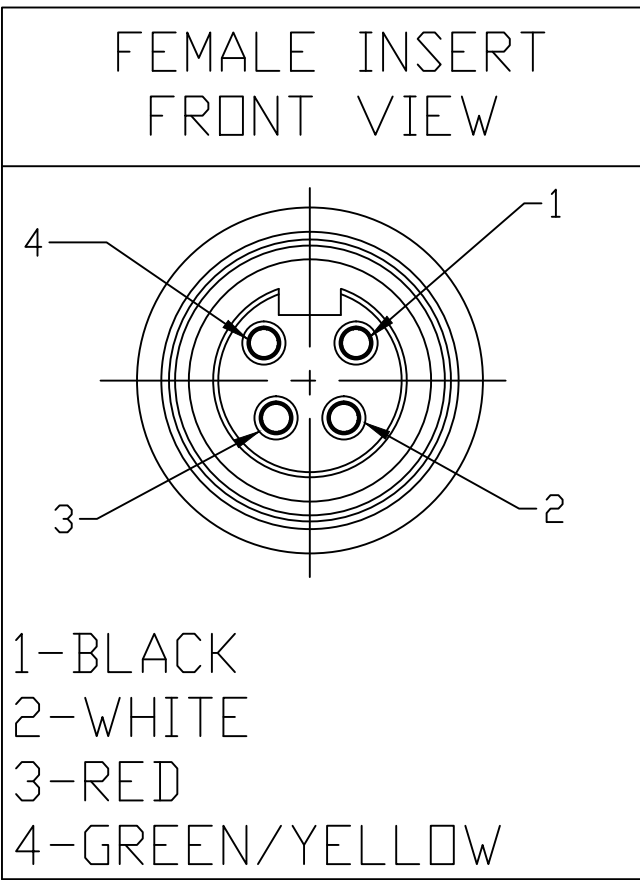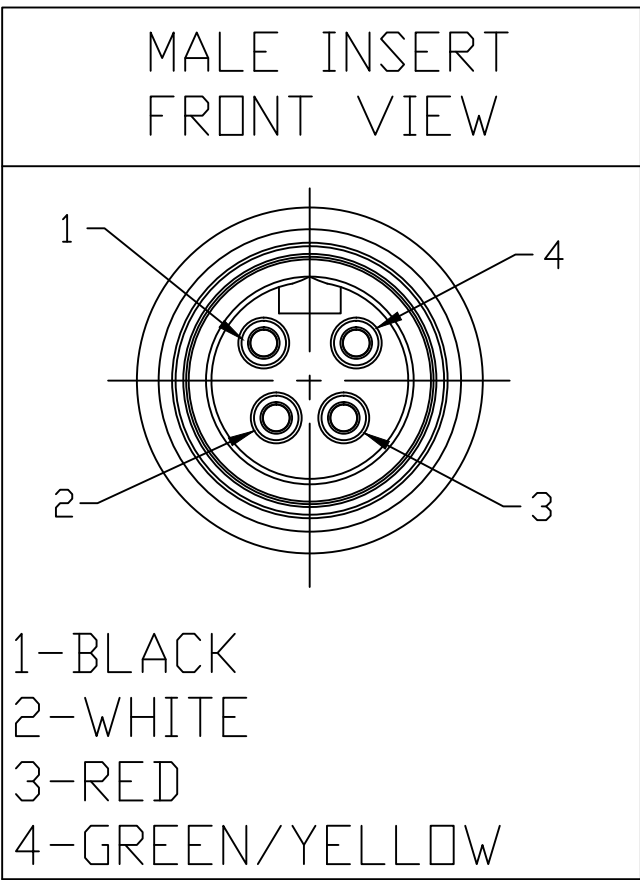

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PVC, BLACK
COUPLING NUT:	ZINC DIE CAST, BLACK E-COATED
MOLDED BODY:	PVC, GRAY
VOLTAGE RATING:	600 VAC/VDC
AMPERAGE RATING:	15 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-20°C TO 105°C
CERTIFICATIONS:	UL & CULUS LISTED, FILE NO. E258922

CHANGE OVERMOLD STYLE EC NO: IPG2017-0361 DRWN: TWOLDEGE 10/3/16 CHKD: M ZIELIN 2016/09/27 APPR: BWOODMAN2013/08/14	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY EBRACKEN	DATE 2013/06/18	TITLE MINI-CHANGE ASSEMBLY 4 POLE M/MFE #14/4 GRAY PVC				
			4 PLACES	±---	±---	CHECKED BY RSTONE	DATE ----					
			3 PLACES	±---	±---	APPROVED BY BWOODMAN	DATE 2013/08/14					
			2 PLACES	±0.13	±.01	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130062-017		SHEET NO. 1 OF 1		
			1 PLACE	±0.3	±---							
			ANGULAR ±.5°			MOLEX INCORPORATED						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[1300621062](#)