


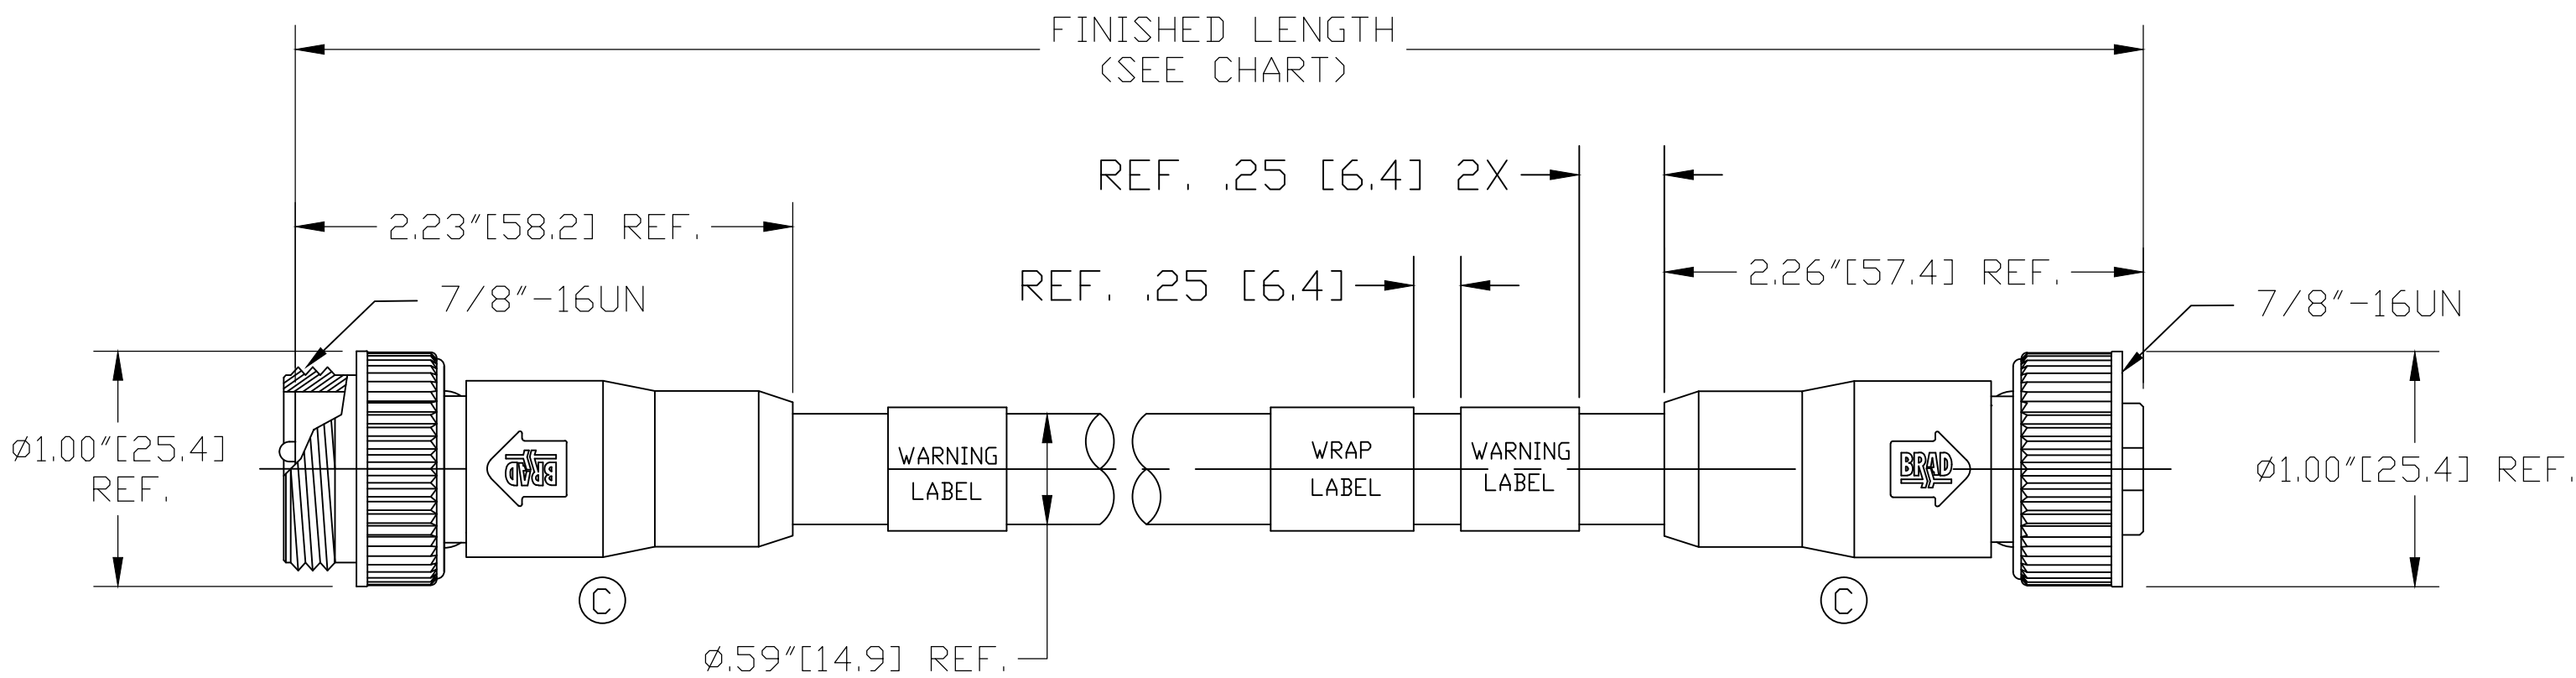

1	BLACK	1
2	WHITE	2
3	RED	3
4	GREEN/YELLOW	4

WIRING DIAGRAM


114030A46M020

Cable type
14/4 AWG TC/STOOD
Gray PVC

cable length
M020----2 Meter
M100----10 Meter


PART NUMBER MATRIX

MALE INSERT
FRONT VIEW

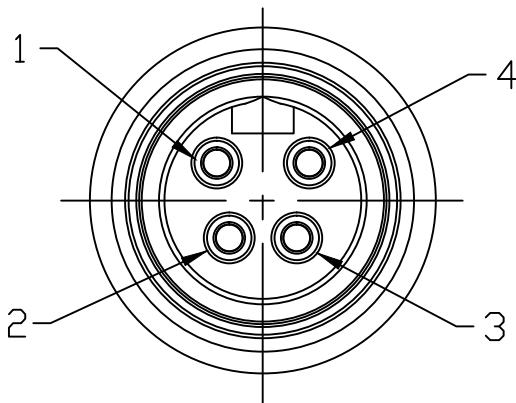


1-BLACK
2-WHITE
3-RED
4-GREEN/YELLOW

FEMALE INSERT
FRONT VIEW

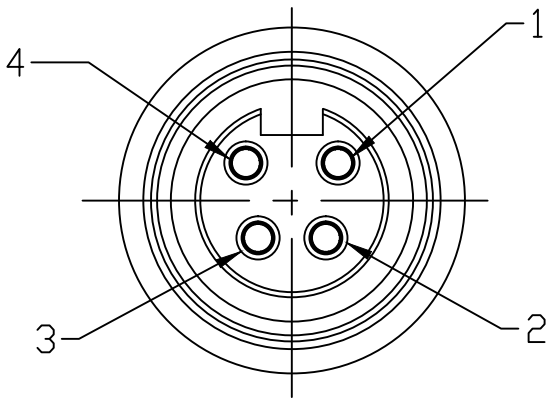

1-BLACK
2-WHITE
3-RED
4-GREEN/YELLOW

CONTACT:	GOLD/NICKEL OVER COPPER ALLOY
INSERT:	PVC, BLACK
COUPLING NUT:	ZINC DIE CAST, BLACK E-COATED
MOLDED BODY:	PVC, GRAY
VOLTAGE RATING:	600 VAC/VDC
AMPERAGE RATING:	15 AMPS
PROTECTION:	IP67
OPERATING TEMPERATURE:	-20°C TO 105°C
CERTIFICATIONS:	UL & CULUS LISTED, FILE NO. E258922

CHANGE OVERMOLD STYLE EC NO: IPG2017-0361 DRWN: TWOLDEGE 10/3/16 CHKD: M ZIELIN 2016/09/27 APPR: BWOODMAN2013/08/14	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY EBRACKEN	DATE 2013/06/18	TITLE MINI-CHANGE ASSEMBLY 4 POLE M/MFE #14/4 GRAY PVC MOLEX INCORPORATED			
			4 PLACES	±---	±---	CHECKED BY RSTONE	DATE ----				
			3 PLACES	±---	±---	APPROVED BY BWOODMAN	DATE 2013/08/14				
			2 PLACES	±0.13	±.01	ANGULAR ±.5°		 MOLEX	DOCUMENT NO. SD-130062-017		SHEET NO. 1 OF 1
			1 PLACE	±0.3	±---						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[1300620129](#)