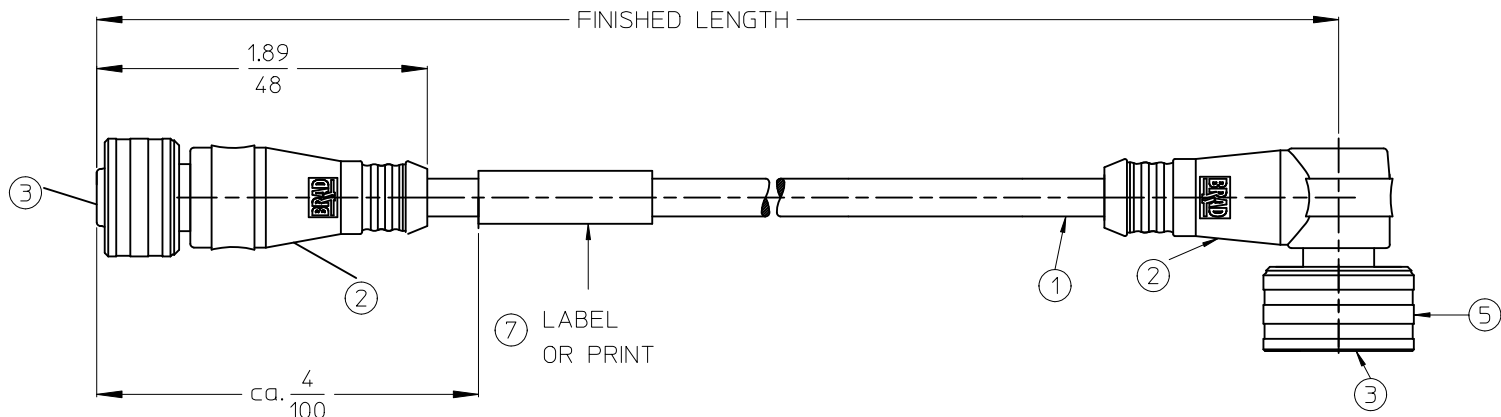



POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200800281	WW3032K05M010	3.28' +2.19" -0 [1.0M +55.6 -0]
4	1200800306	WW4032K05M010	3.28' +2.19" -0 [1.0M +55.6 -0]

CONNECTOR SPECIFICATION	
VOLTAGE RATING:	300V
AMPERAGE RATING:	4A
PROTECTION CLASS:	IP 68
OPERATING TEMPERATURE:	-30°C / 80°C
UL CERTIFICATION:	FILE NO. E152210
CSA CERTIFICATIONS:	FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	ULTRA-LOCK	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au OVER Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PUR	YELLOW
1	CABLE #22	TPE	YELLOW

ENTER DESCRIPTION
EC NO: WEU2010-0503
DRW:WBRAUCH 2010/04/14
CHKD:REISSNER 2010/02/16
APPR:REISSNER 2010/05/12

2

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± 0.1
1 PLACE ± 0.3 ± ---
ANGULAR ± ---°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY
APOHL_WEU

CHECKED BY
REISSNER

APPROVED BY
FPACHER

MATERIAL NO.
SEE NOTES

DATE
2010/02/16

DATE
2010/02/16

DATE
2010/02/24

SCALE
M12U-XP-FE-STR
XP-M-90-XM

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

MOLEX INCORPORATED

SD-120080-026

1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200800306