




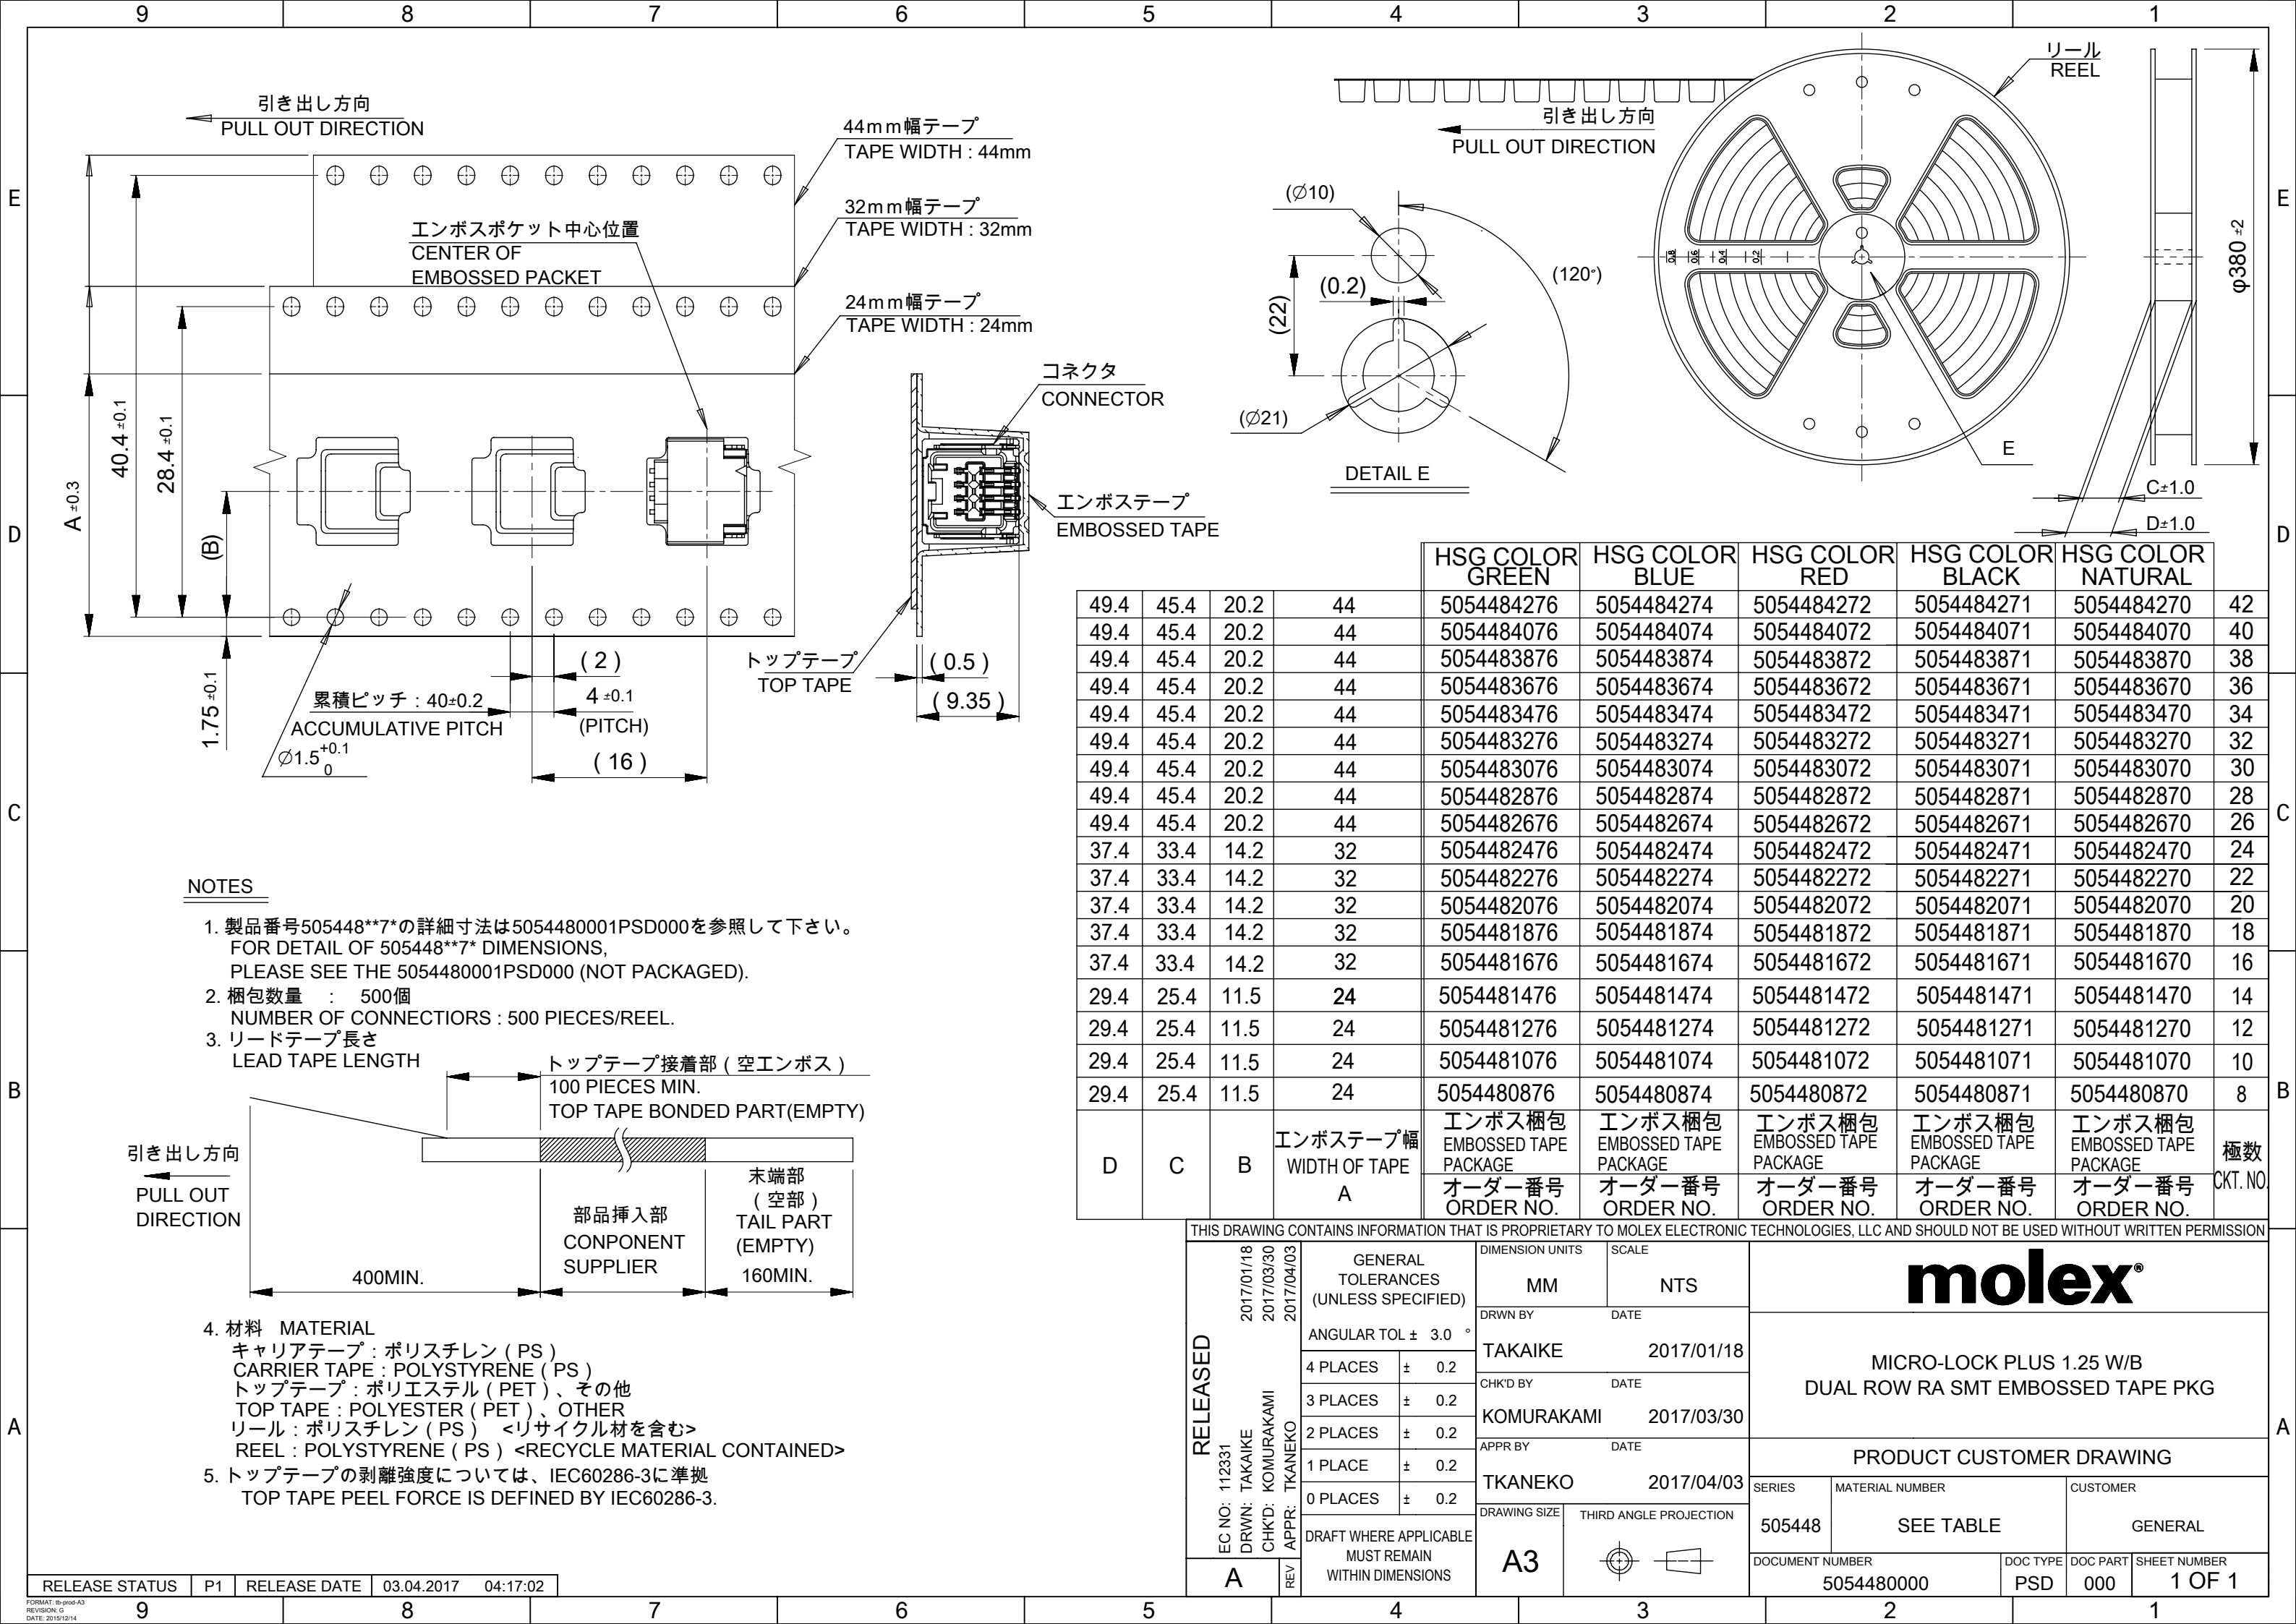


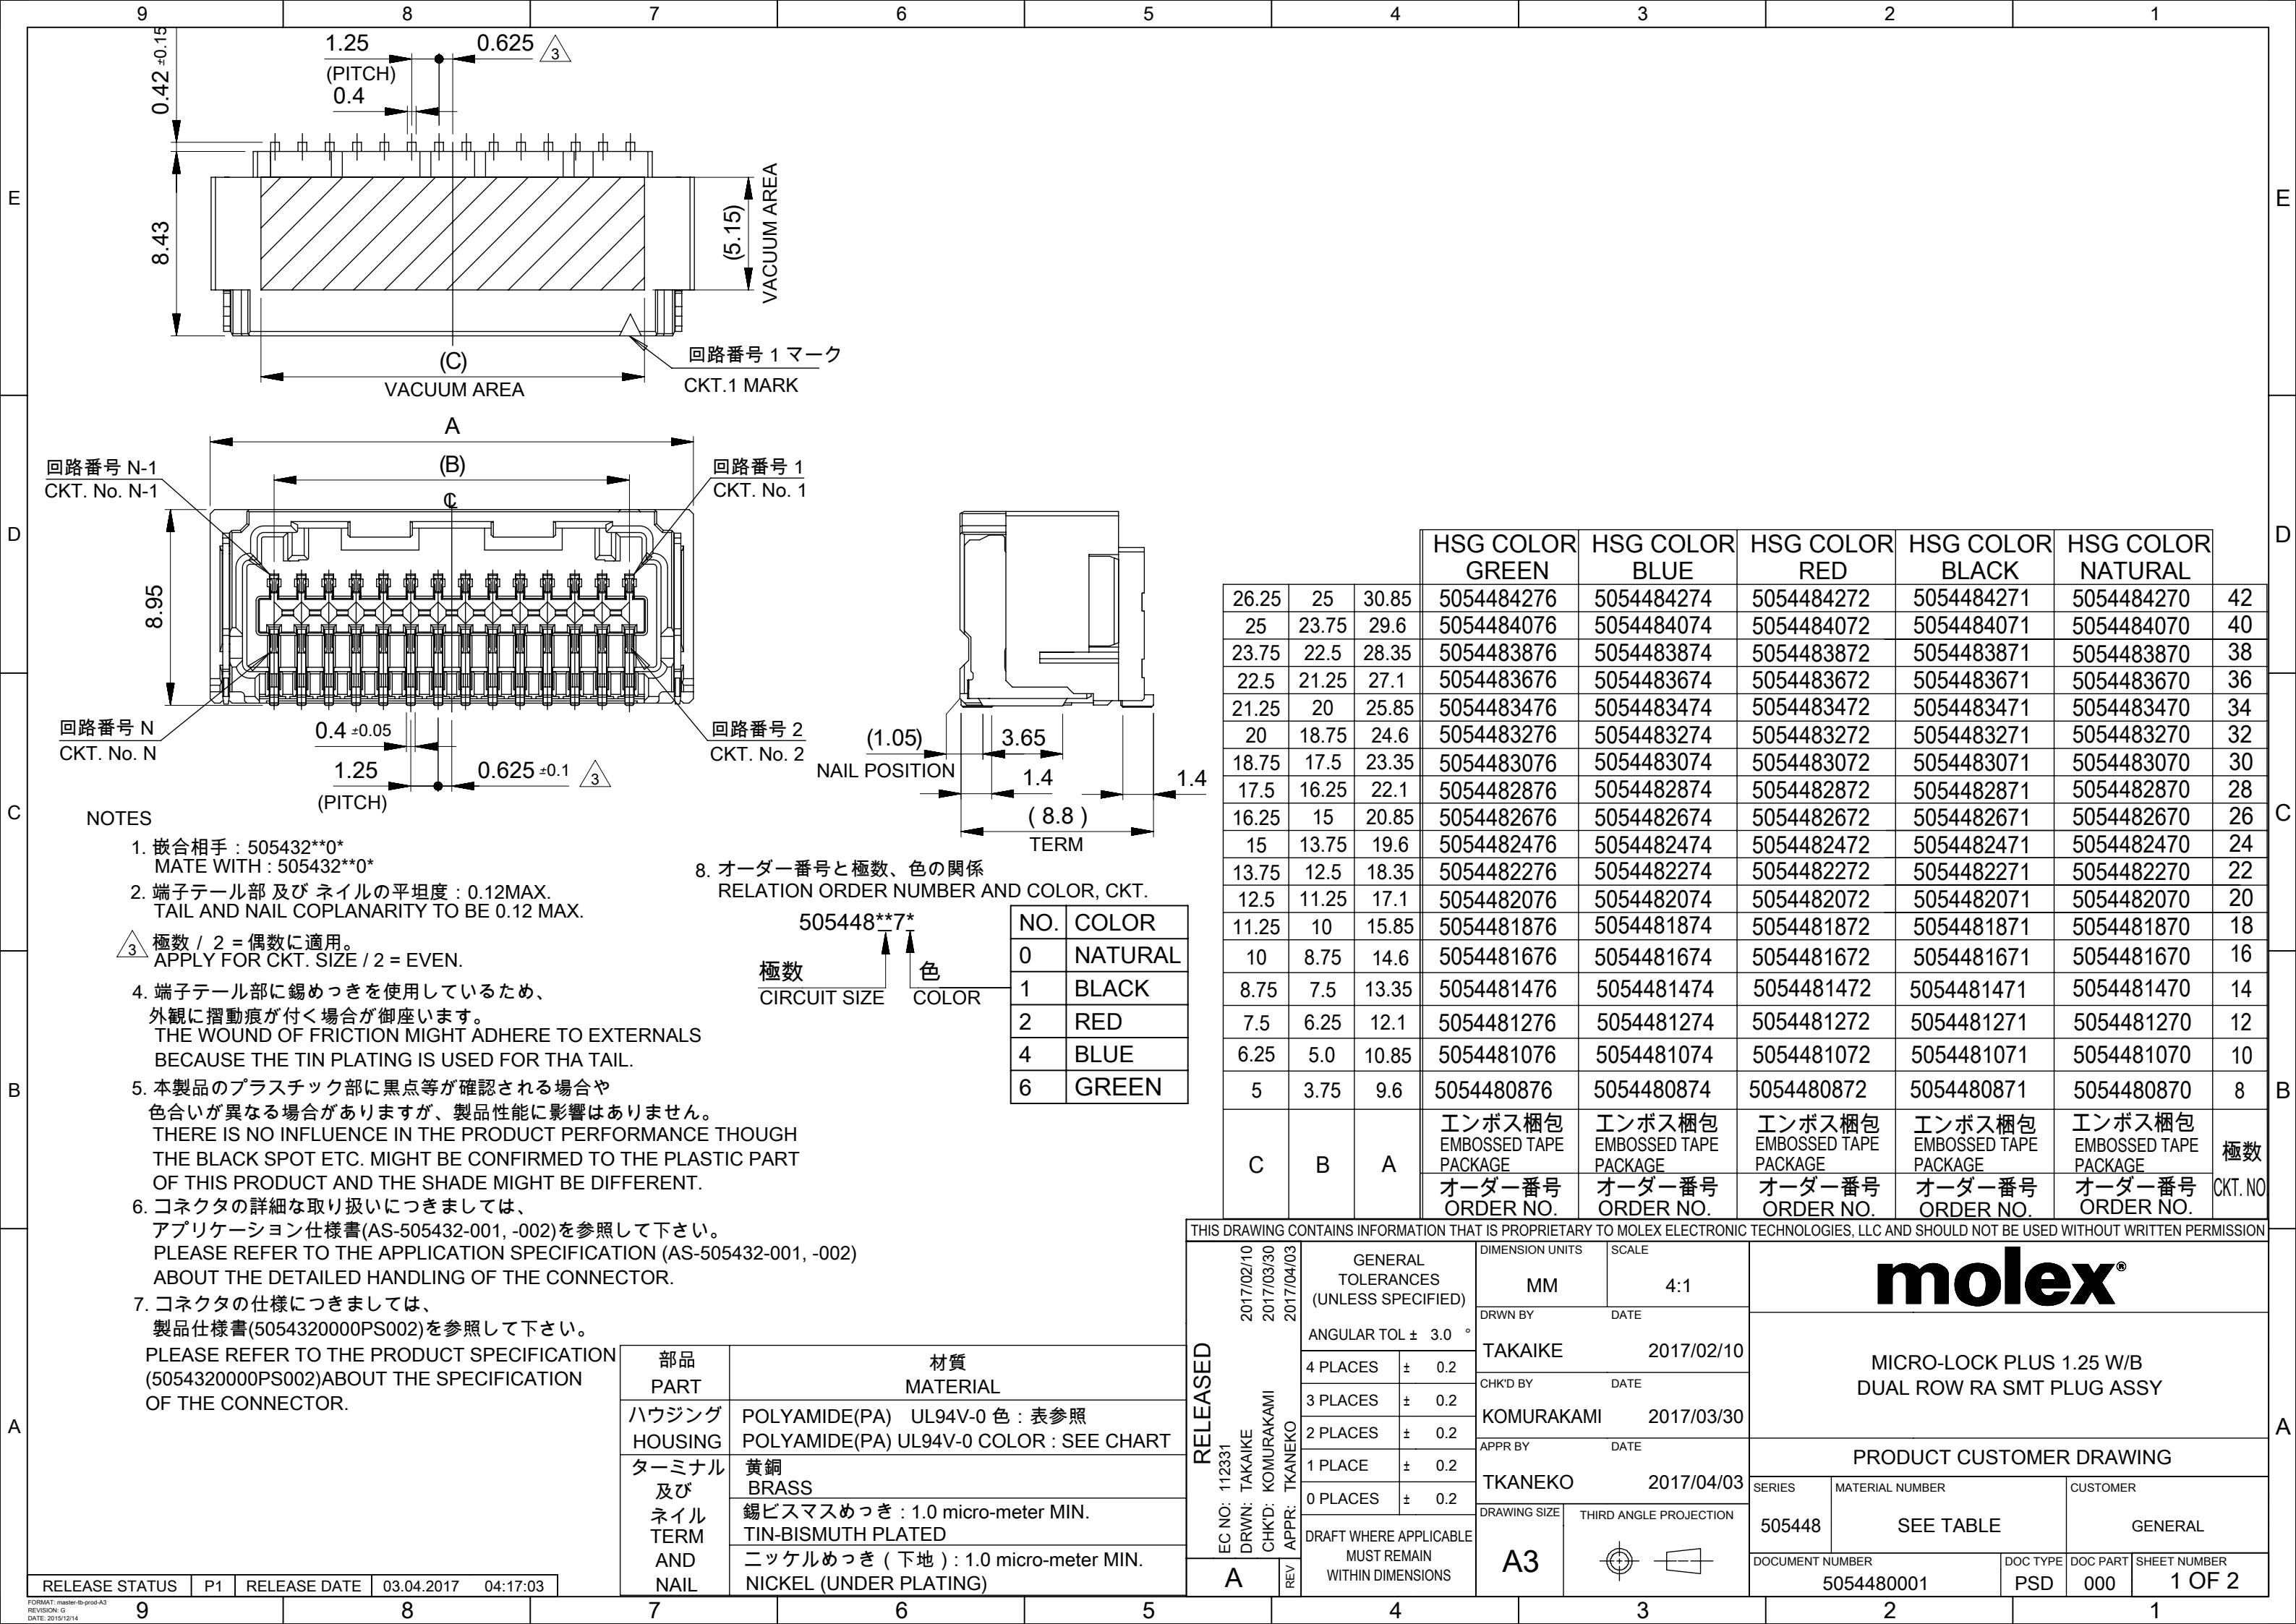




8-24CKT. 係止形状
LOCK SHAPE OF 8-24CKT.

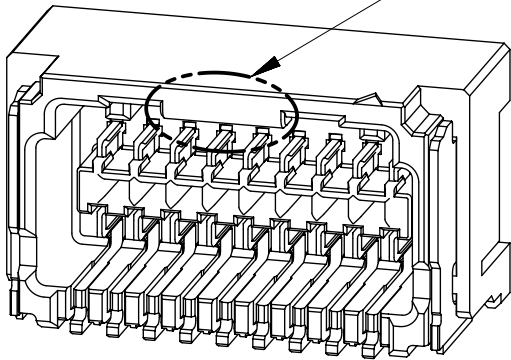


26-32CKT. 係止形状
LOCK SHAPE OF 26-32CKT.

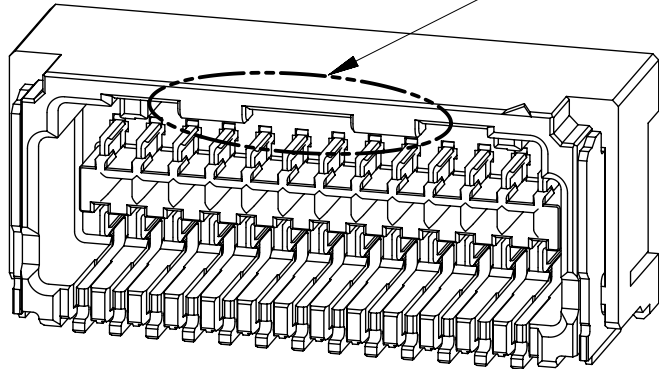

34-42CKT. 係止形状
LOCK SHAPE OF 34-42CKT.

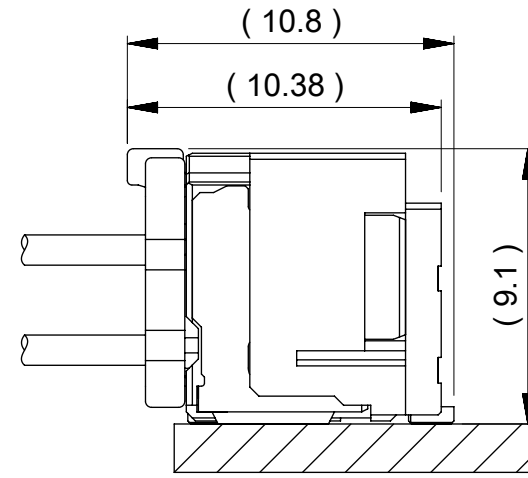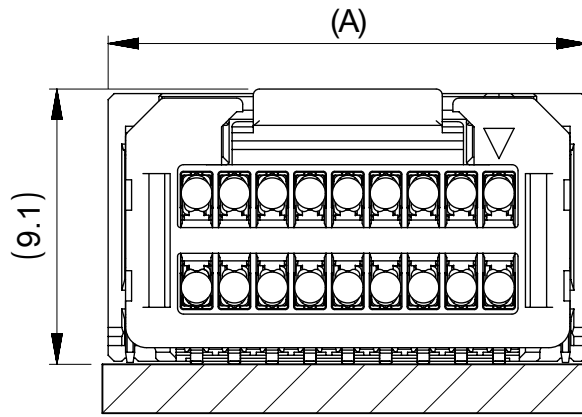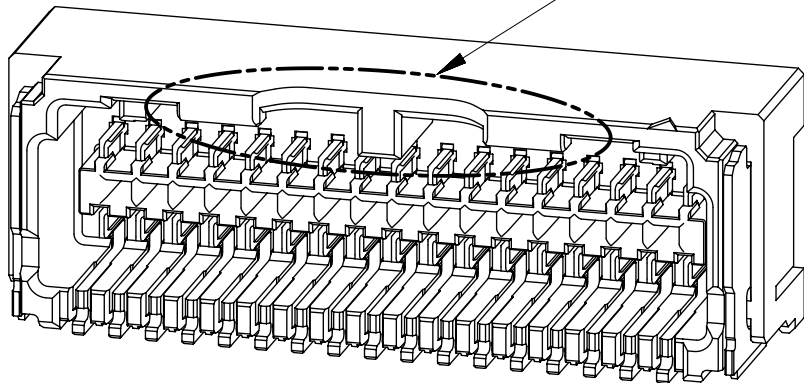

嵌合状態図
MATED CONNECTORS

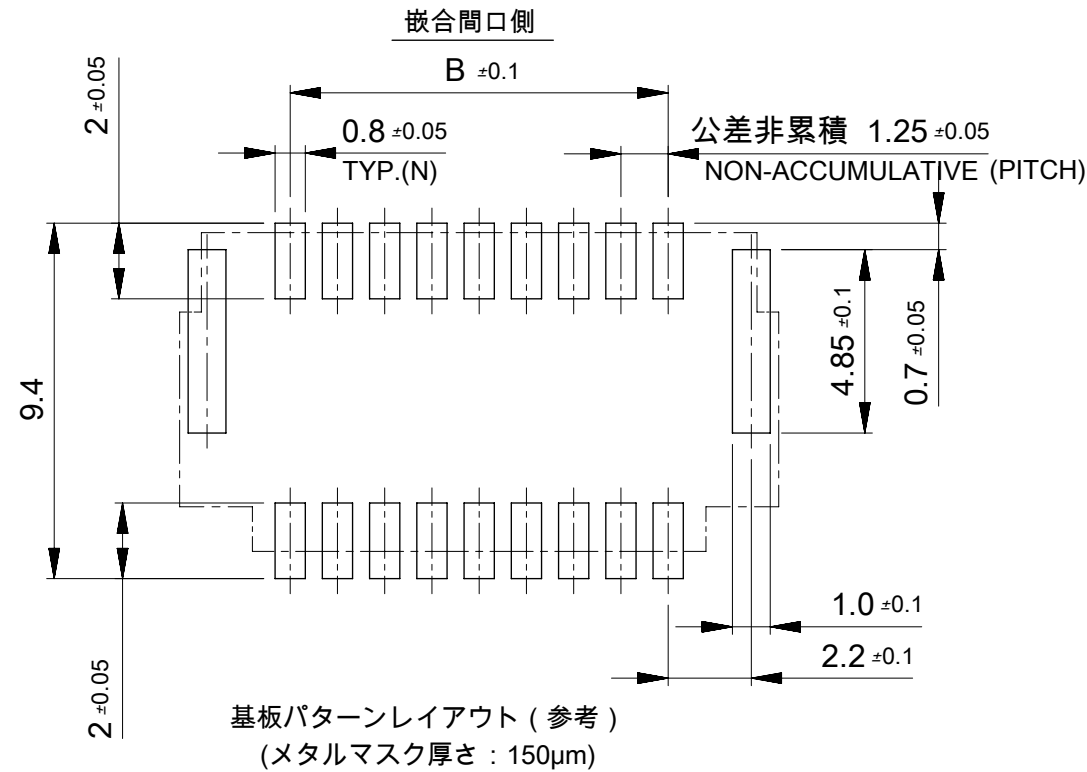

RECCOMENDED P.C.B. PATTERN LAYOUT (REF.)
(METAL MASK THICKNESS : $150\mu\text{m}$)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
RELEASED	EC NO: 112331 DRWN: TAKAIKE CHK'D: KOMURAKAMI APPR: TKANEKO	2017/02/10 2017/03/30 2017/04/03	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®							
					MM		4:1									
			ANGULAR TOL ± 3.0 °		DRWN BY		DATE		MICRO-LOCK PLUS 1.25 W/B DUAL ROW RA SMT PLUG ASSY							
					TAKAIKE		2017/02/10									
			4 PLACES ± 0.2		CHK'D BY		DATE						PRODUCT CUSTOMER DRAWING			
					KOMURAKAMI		2017/03/30									
	3 PLACES ± 0.2		APPR BY		DATE		SERIES				MATERIAL NUMBER		CUSTOMER			
			TKANEKO		2017/04/03											
	2 PLACES ± 0.2		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		505448		SEE TABLE		GENERAL			
															A3	
1 PLACE ± 0.2		0 PLACES ± 0.2		DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER						
												A		REV		5054480001