




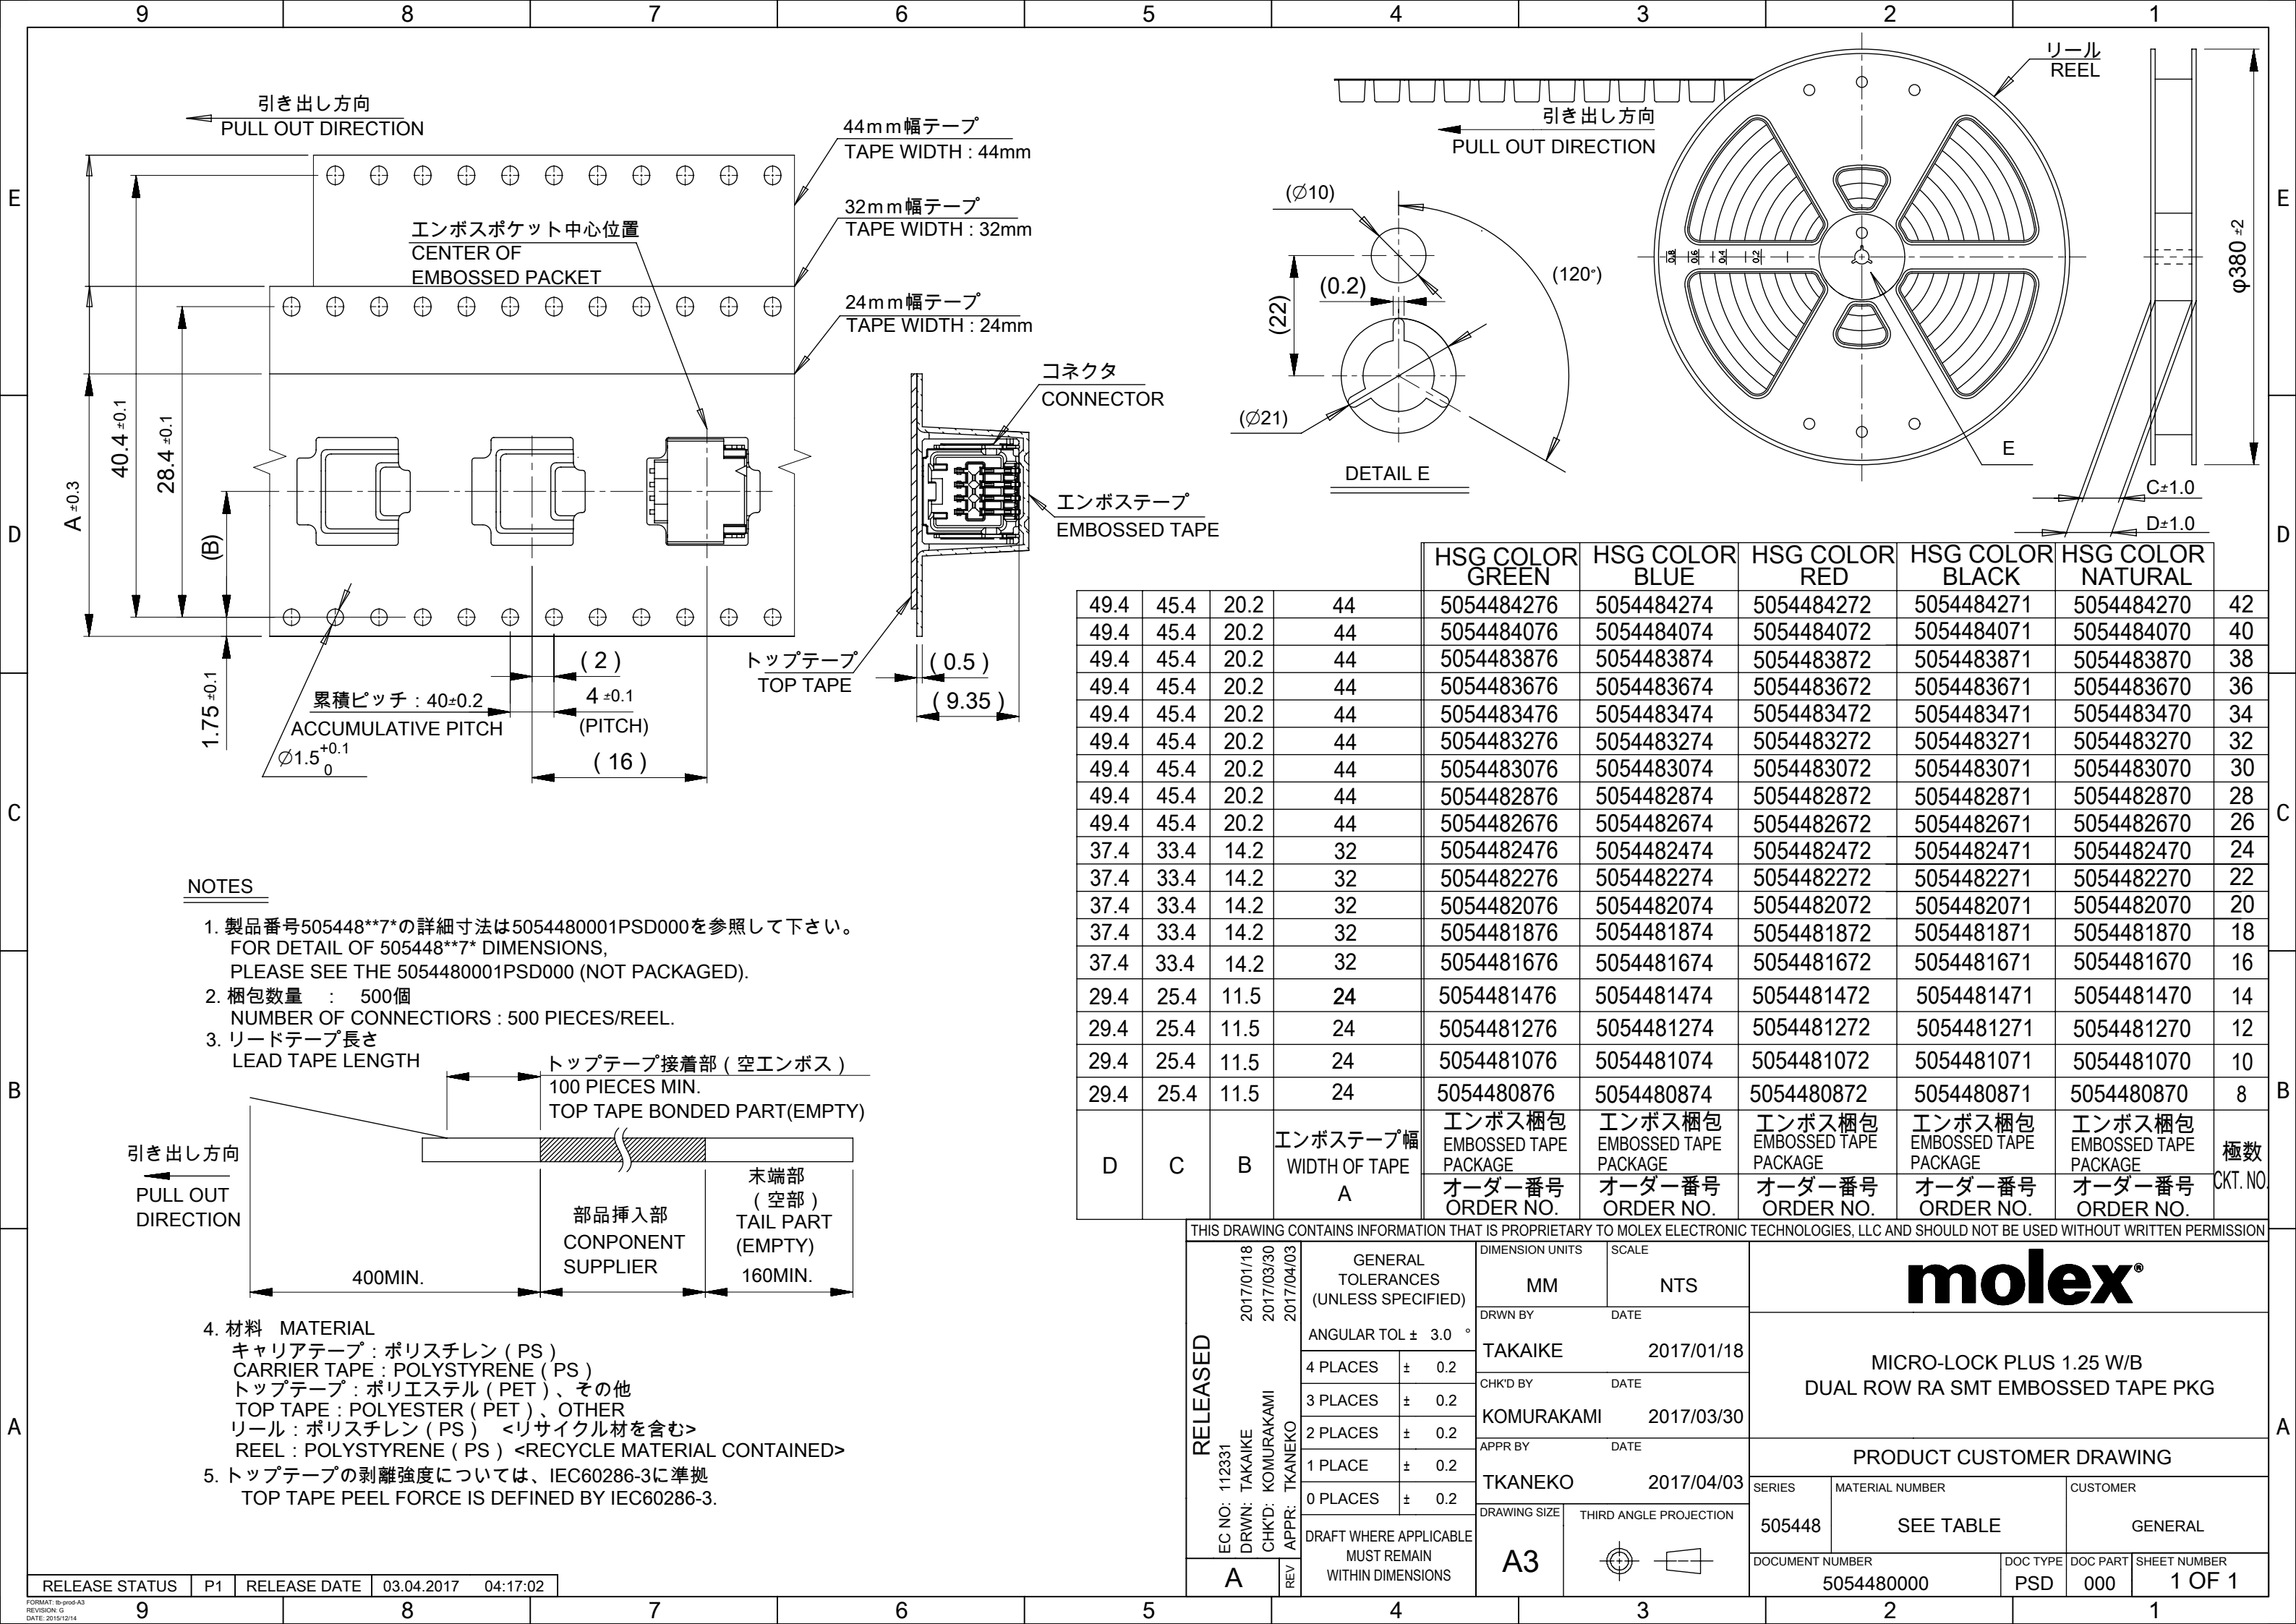


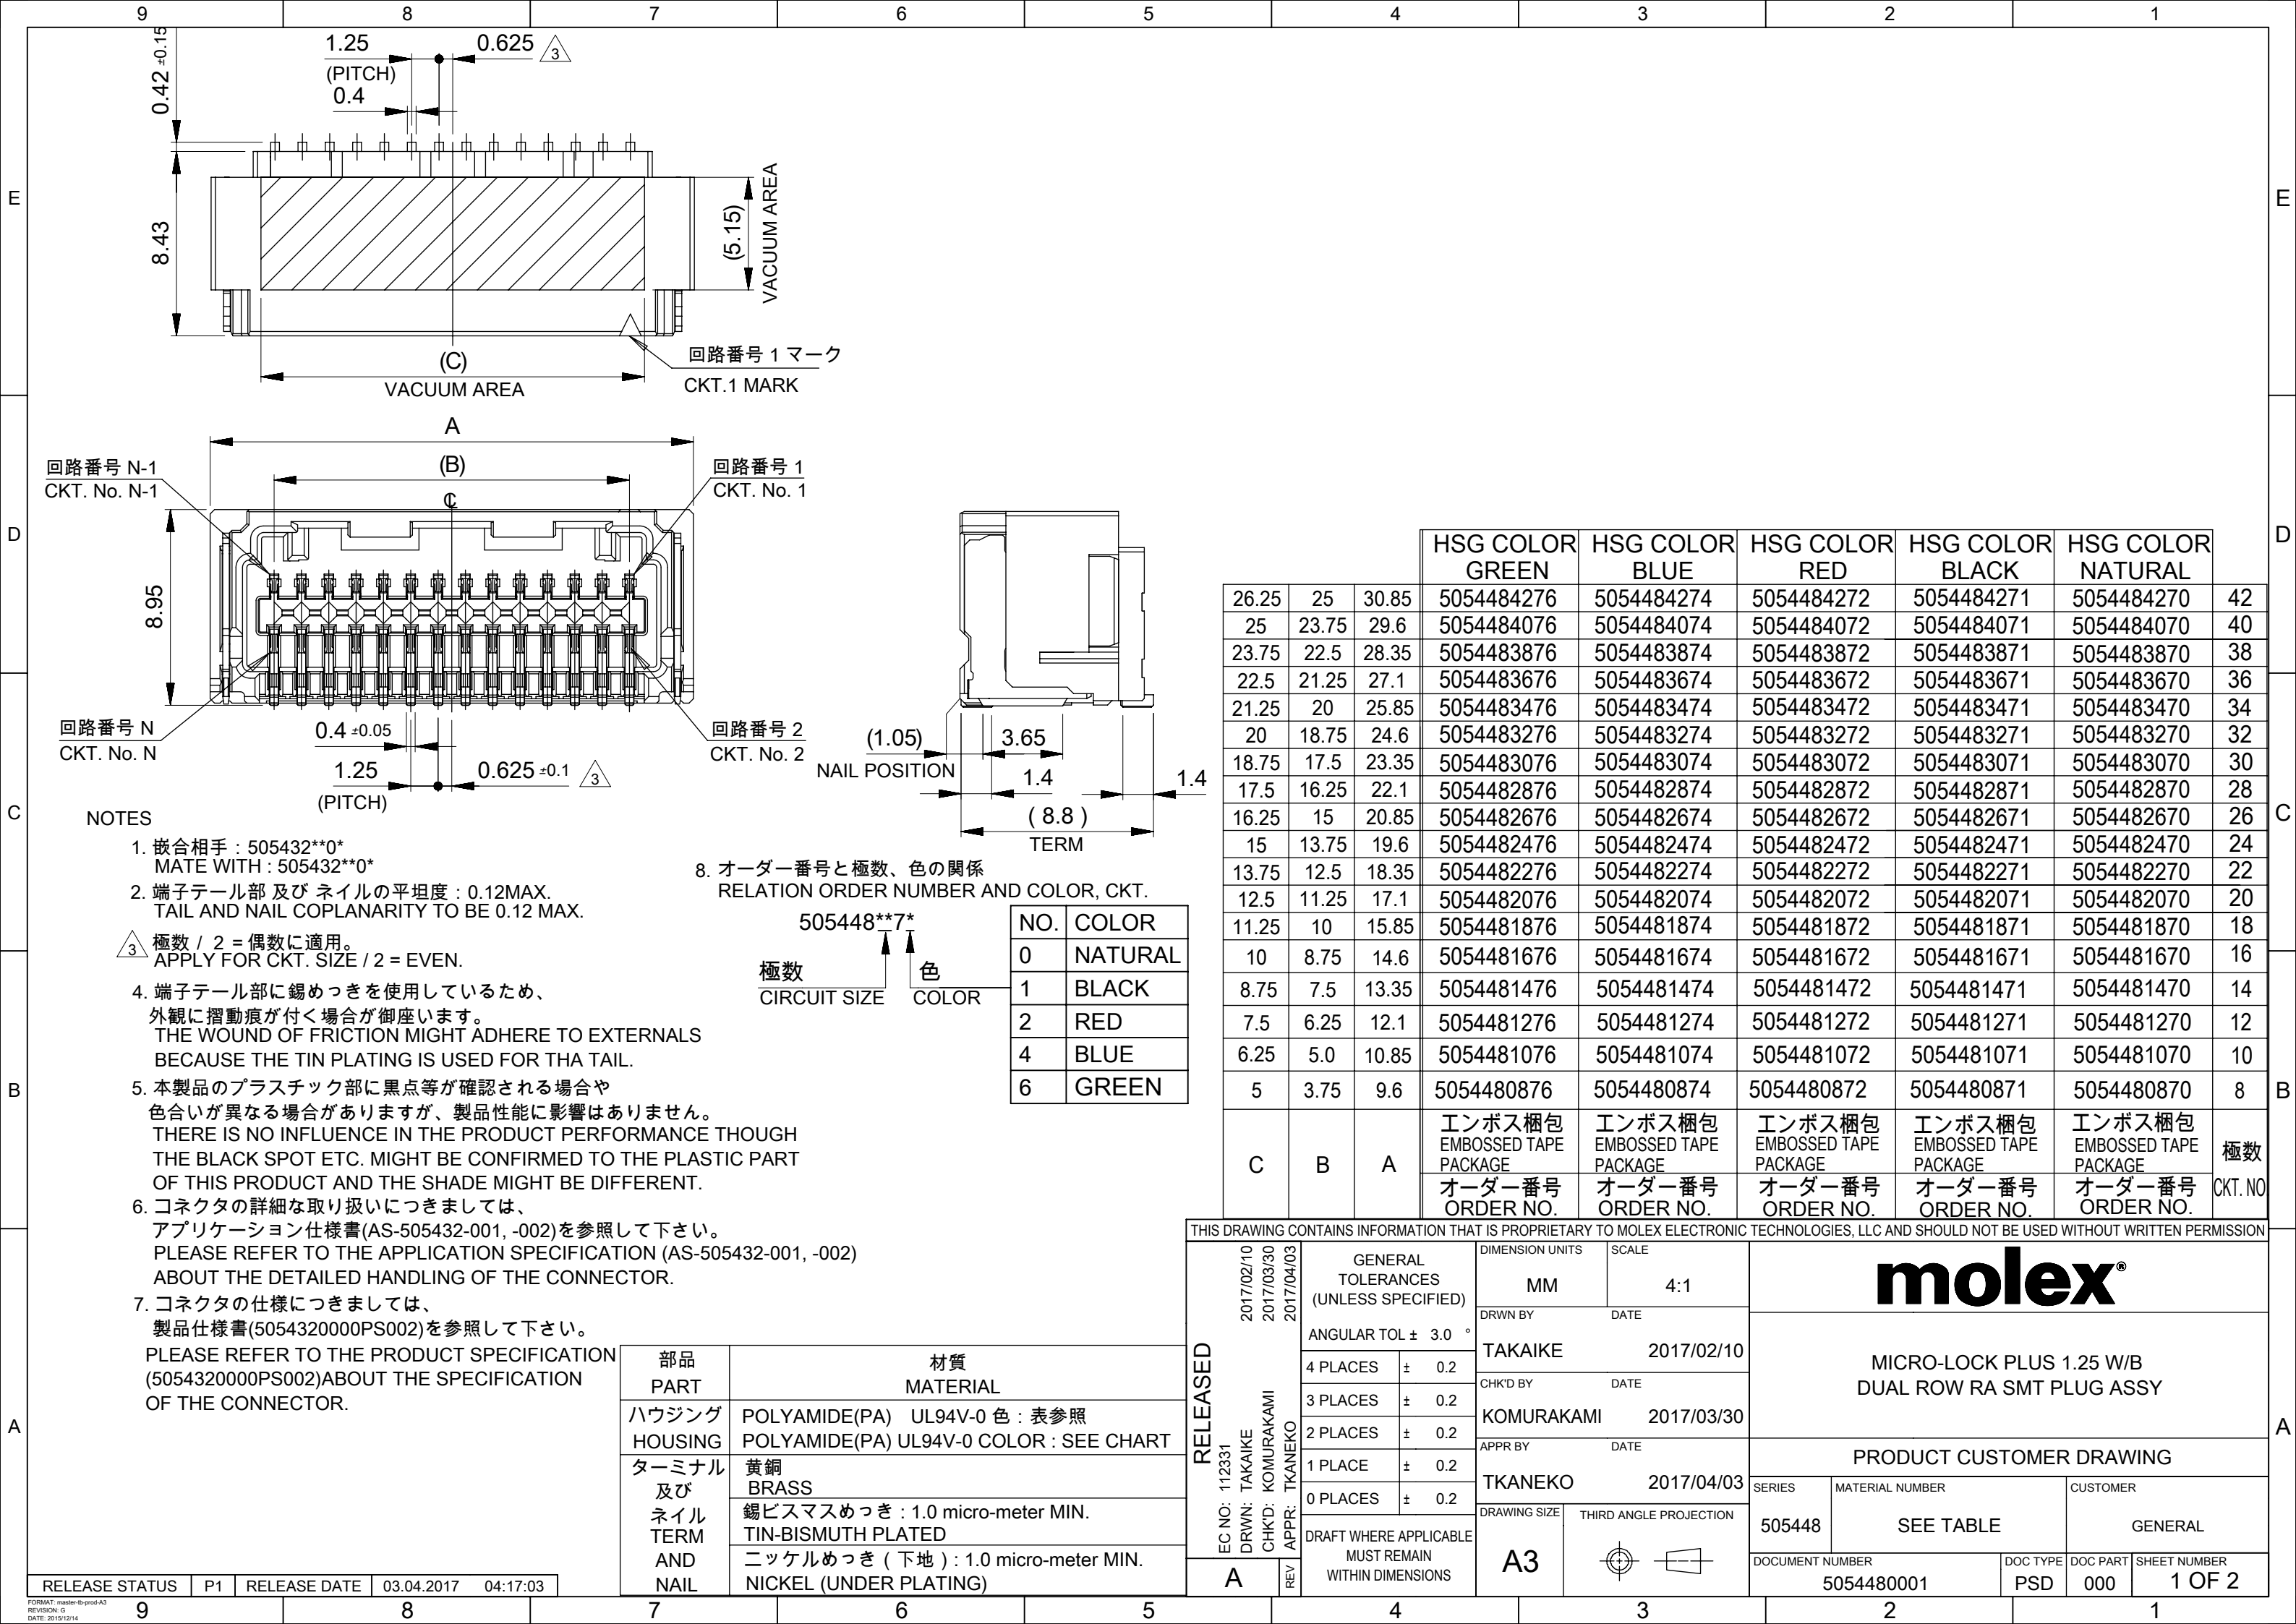




8-24CKT. 係止形状
LOCK SHAPE OF 8-24CKT.

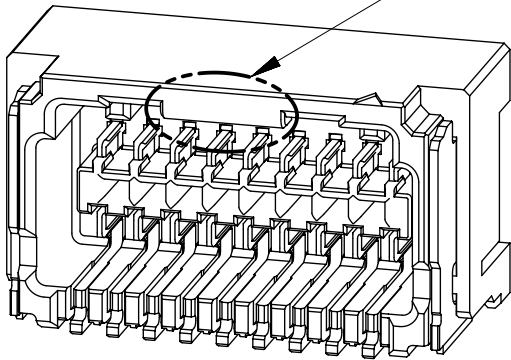


26-32CKT. 係止形状
LOCK SHAPE OF 26-32CKT.

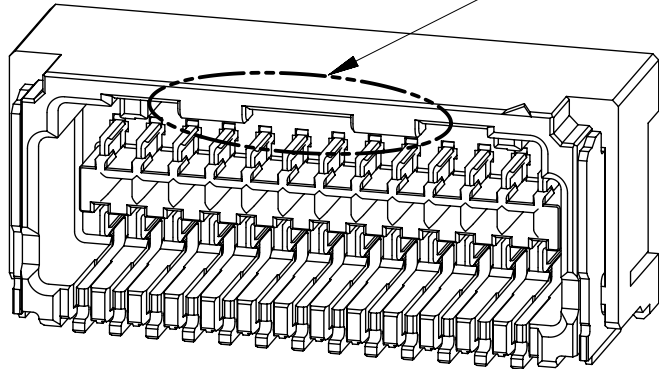


34-42CKT. 係止形状
LOCK SHAPE OF 34-42CKT.

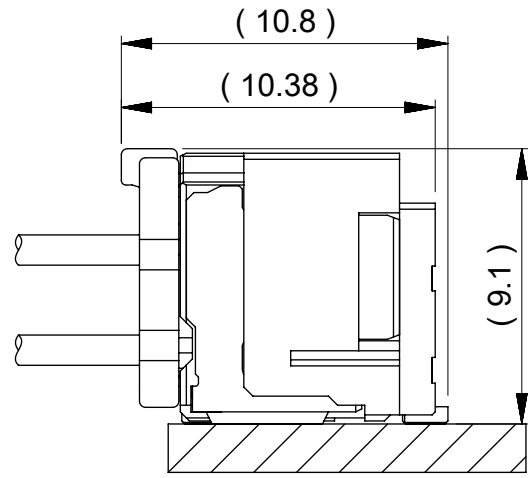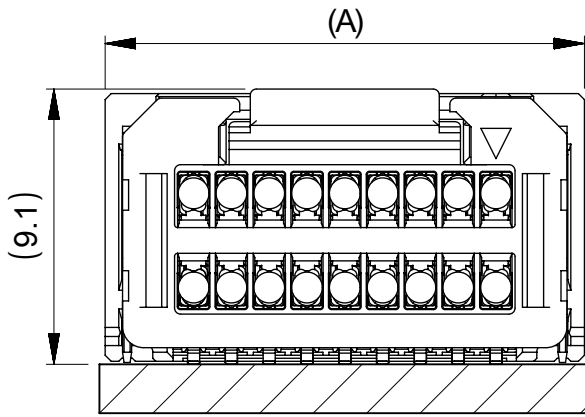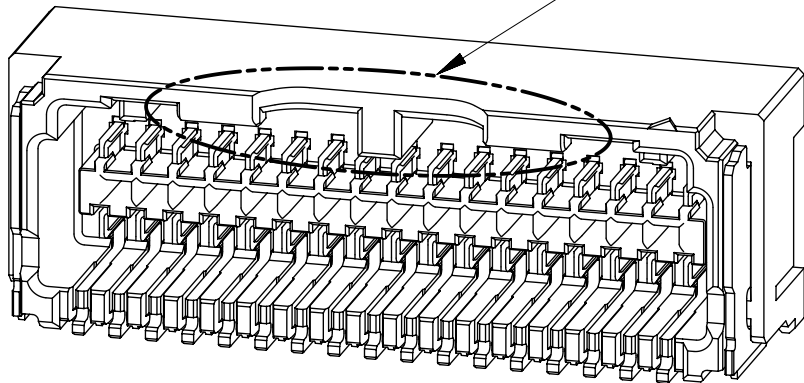

嵌合状態図
MATED CONNECTORS

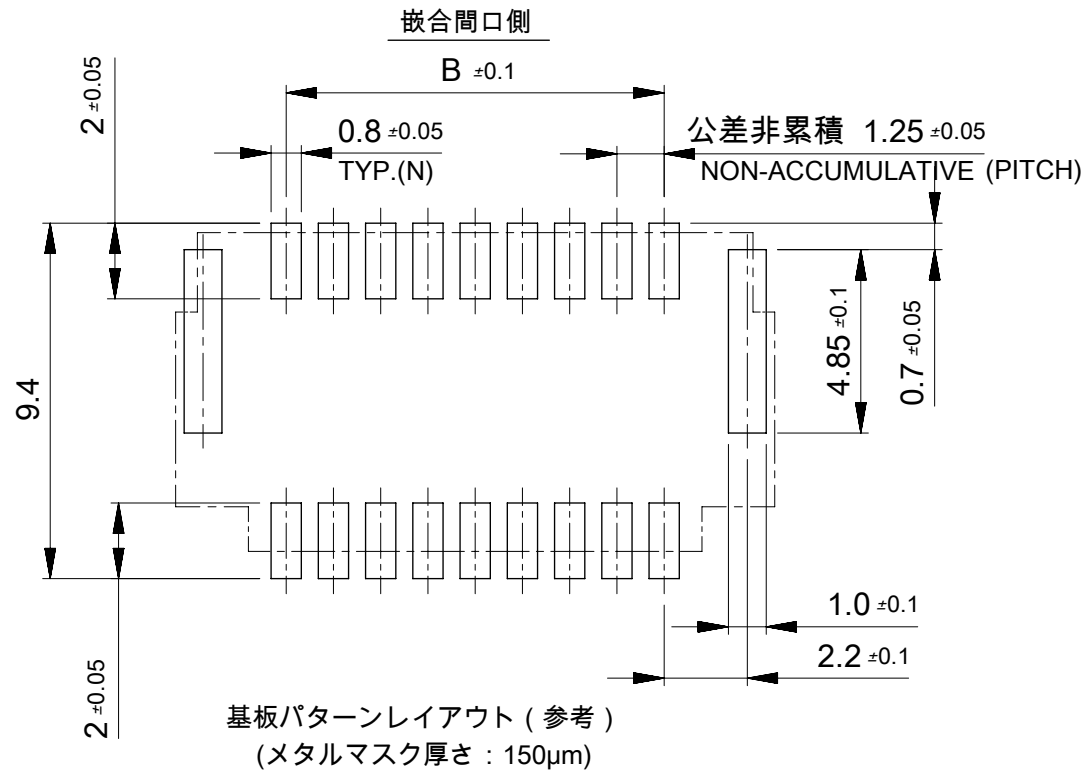

RECCOMENDED P.C.B. PATTERN LAYOUT (REF.)
(METAL MASK THICKNESS : 150μm)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
RELEASED	EC NO: 112331 DRWN: TAKAIKE CHK'D: KOMURAKAMI APPR: TKANEKO	2017/02/10 2017/03/30 2017/04/03	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION UNITS		SCALE		molex®								
						MM		4:1										
			ANGULAR TOL ± 3.0 °			DRWN BY		DATE		MICRO-LOCK PLUS 1.25 W/B DUAL ROW RA SMT PLUG ASSY								
						TAKAIKE		2017/02/10										
			4 PLACES ± 0.2			CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING								
						KOMURAKAMI		2017/03/30										
			3 PLACES ± 0.2			APPR BY		DATE		SERIES 505448					MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL	
						TKANEKO		2017/04/03										
			2 PLACES ± 0.2			DRAWING SIZE		THIRD ANGLE PROJECTION		DOCUMENT NUMBER 5054480001		DOC TYPE PSD		DOC PART 000		SHEET NUMBER 2 OF 2		
						A3												
1 PLACE ± 0.2			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS															
0 PLACES ± 0.2																		
A			REV															