


13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5*-0")								

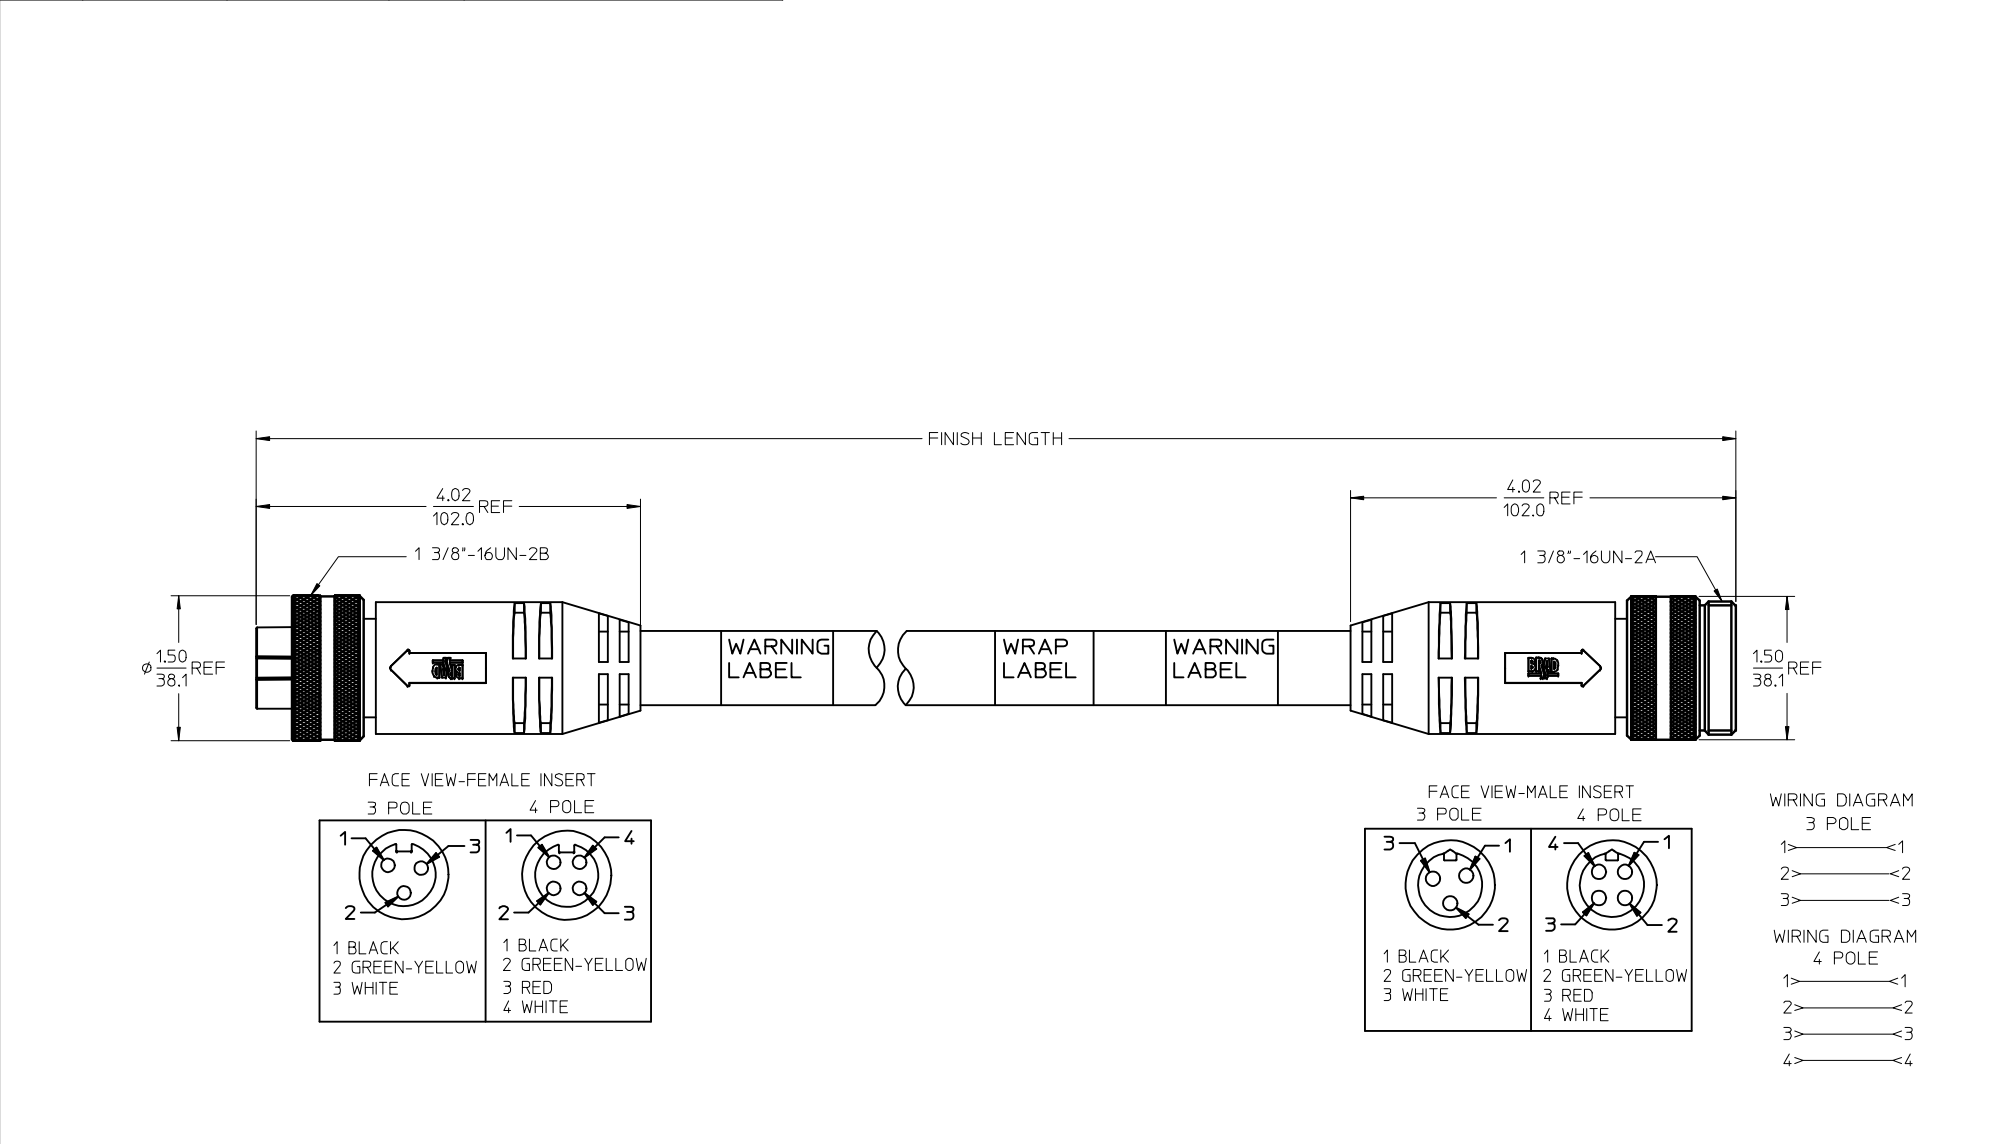

SPECS:

OVERMOLD: GRAY PVC

INSERT: BLACK PVC

COUPLING NUT: ANODIZED ALUMINUM

CABLE: #10AWG GRAY PVC

DUAL RATED UL TC/OPEN WIRING & STOOV

ELECTRICAL: 600V AC/DC

ADDED PART NUMBER EC NO: IPG2016-1155 DRWNGGUSTAFSON 2016/02/23 CHKD:MZIELINSKI 2016/03/15 APPR:BMWOODMAN 2016/02/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm	INCH	DRAWN BY B.RUPERT	DATE 01/12/10	TITLE QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES MOLEX INCORPORATED			
		4 PLACES ± --- ± ---	3 PLACES ± --- ±.005	CHECKED BY B.WOODMAN	DATE 01/12/10				
		2 PLACES ± --- ±.010	1 PLACE ± --- ±.020	APPROVED BY JFMURPHY	DATE 2010/01/15	DOCUMENT NO. SD-130064-065			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[1300640272](#)