


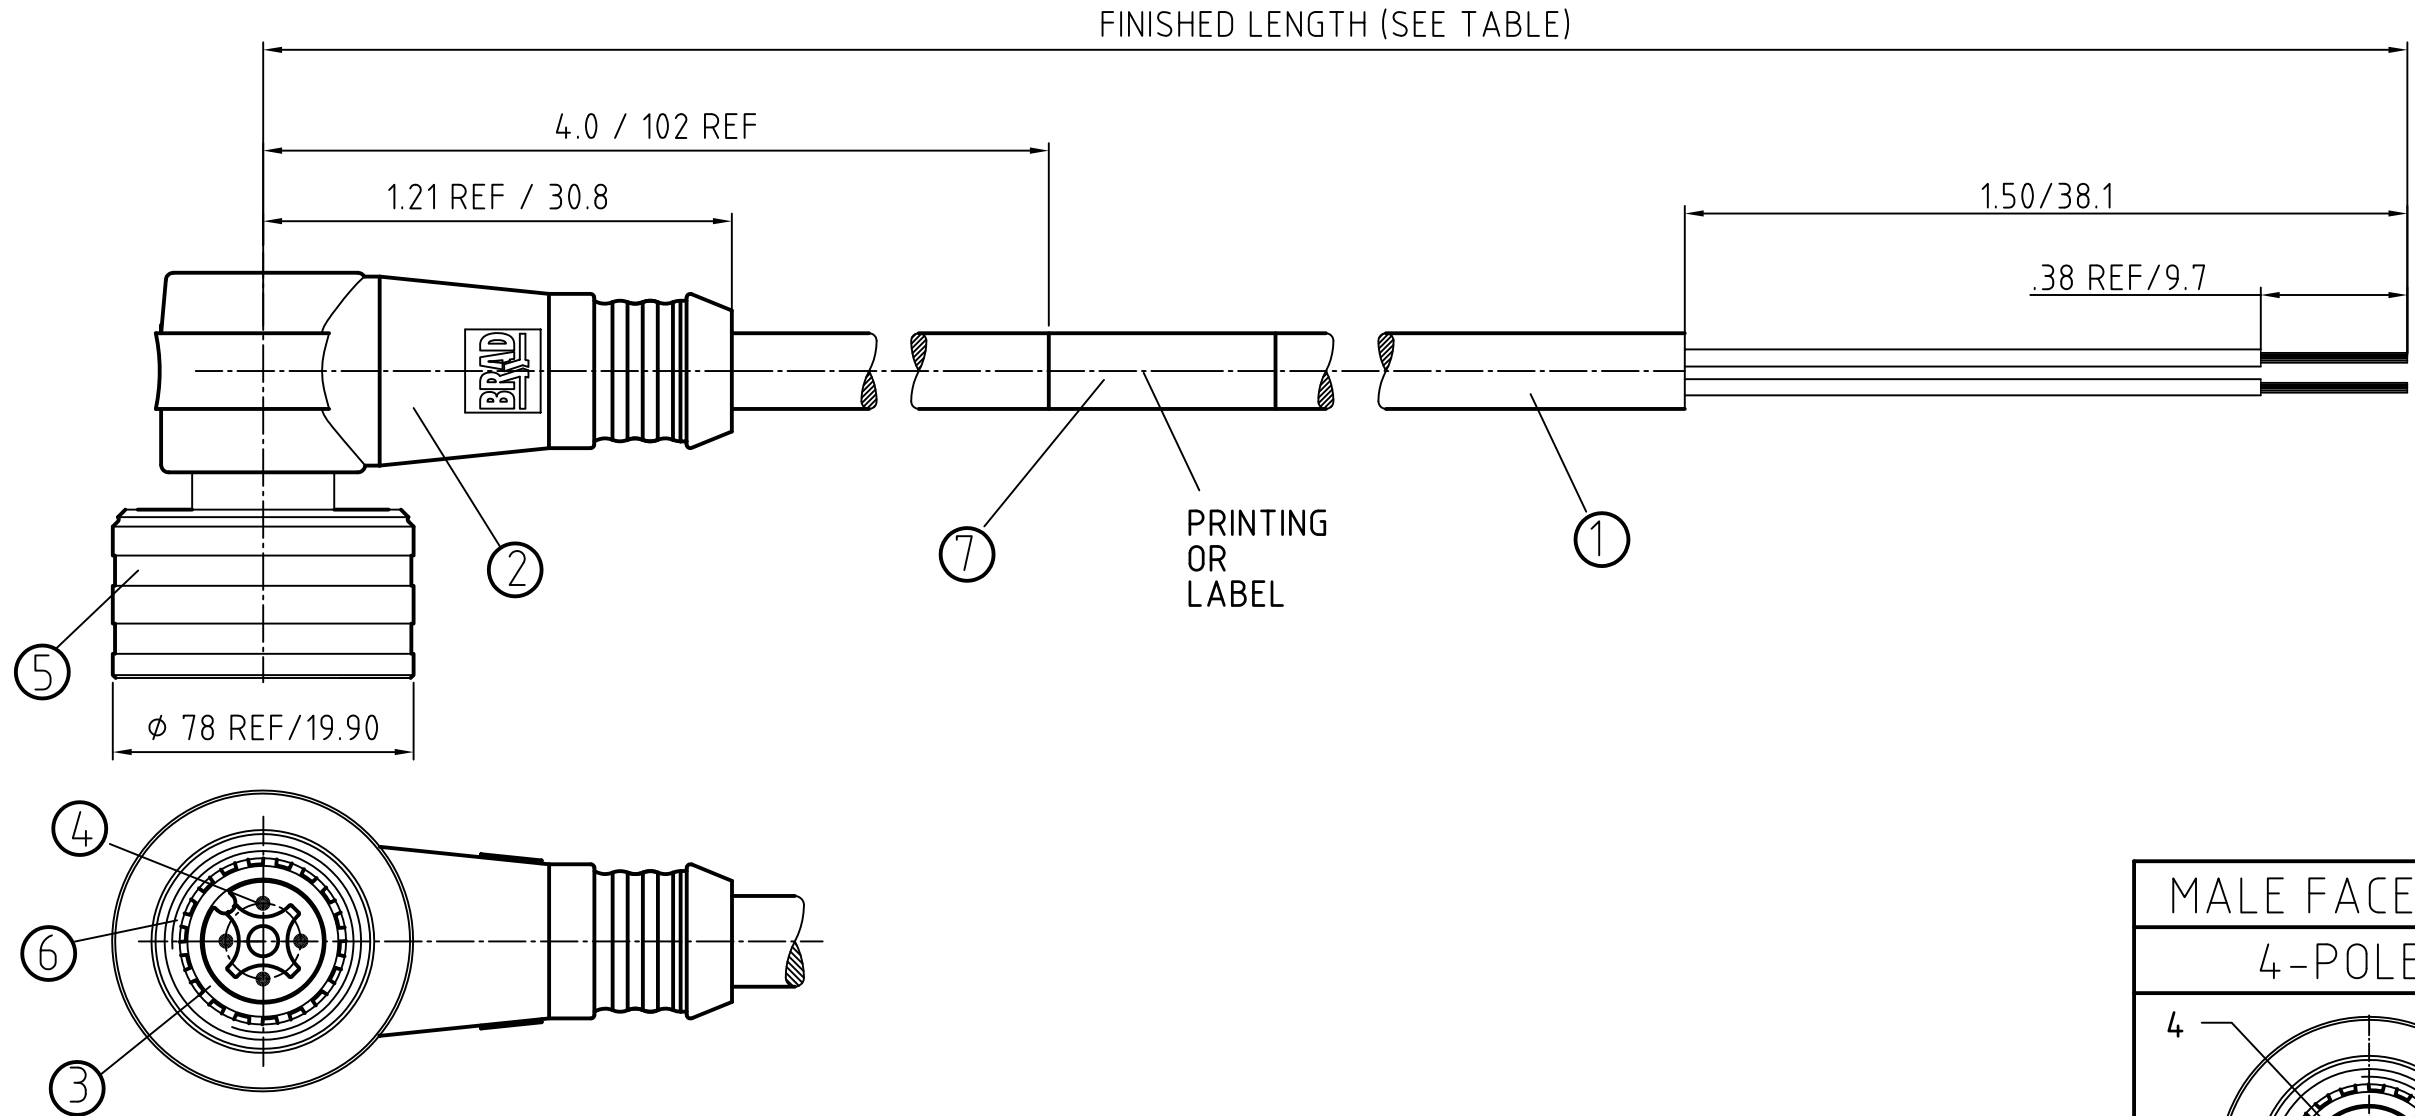

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
CONTACT RESISTANCE	<5M Ohm
PROTECTION	IP67/68/69K
OPERATING TEMPERATURE	-25°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200790192	W04007K05M020	6.56' +3.5" -0 [2.0M +89 -0]

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	COUPLER	BRASS	NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE (PUR)	YELLOW
1	CABLE- 22/4 AWG (COPPER STRANDING) 4 CONDUCT. 300V	JACKET: TPE	JACKET: YELLOW

DESCRIPTION EC NO: WEU2010-0350 DRWN: LSTEMMLE 2010/02/12 CHKD: NS APPR: FPACHER 2010/02/15	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				DRAWN BY	DATE	MICRO-CHANGE ULTRA LOCK 4-POLE MALE 90 #22/3 YELLOW TPE CABLE				
				LSTEMMLE	2010/02/12					
				CHECKED BY	DATE	MOLEX INCORPORATED				
				FP	2010/02/12					
				APPROVED BY	DATE	DOCUMENT NO.		SHEET NO.		
				FPACHER	2010/02/15	SD-120079-031		1 OF 1		
				MATERIAL NO.						
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[1200790192](#)