


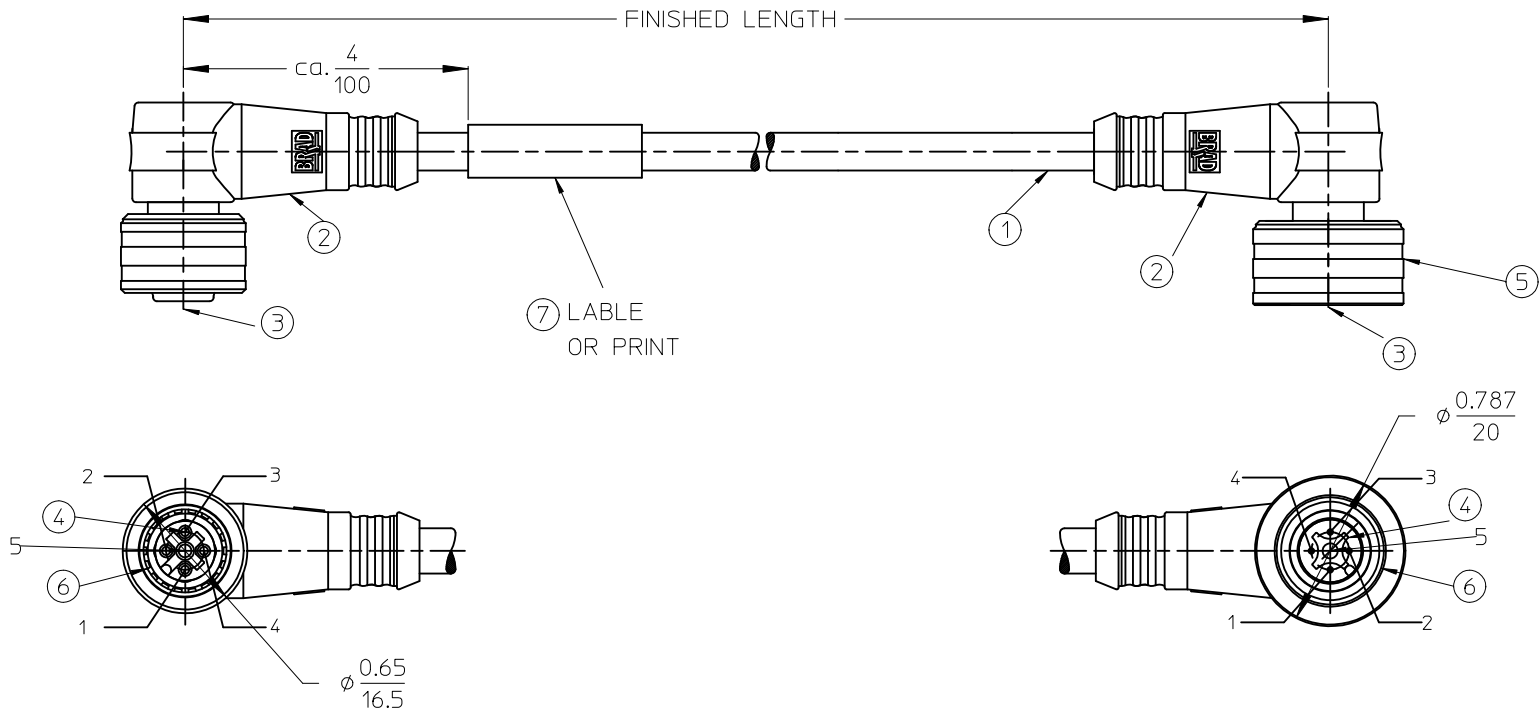

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200800351	WW3033A09M010	3.28" +2.19" -0 [1.0M +55.6 -0]
4	1200800391	WW4033A09M010	3.28" +2.19" -0 [1.0M +55.6 -0]
5	1200800431	WW5033A09M010	3.28" +2.19" -0 [1.0M +55.6 -0]

CONNECTOR SPECIFICATION	
VOLTAGE RATING:	300V
AMPERAGE RATING:	4A
PROTECTION CLASS:	IP 68
OPERATING TEMPERATURE:	-30°C / +80°C
UL CERTIFICATION:	FILE NO. E152210
CSA CERTIFICATIONS:	FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	ULTRA-LOCK	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au OVER Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE #22	PVC	YELLOW

ENTER DESCRIPTION	REV
EC NO: WEU2010-0333 DRWN: APOHL_WEU 2010/02/10 CHKD: REISSNER 2010/02/11 APPR: FPACHER 2010/02/25	1

QUALITY SYMBOLS
▽=0
◻=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
4 PLACES	±---
3 PLACES	±---
2 PLACES	±---
1 PLACE	±0.3
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
APOHL_WEU	2010/02/10
CHECKED BY	DATE
REISSNER	2010/02/11
APPROVED BY	DATE
FPACHER	2010/02/24
MATERIAL NO.	
SEE NOTES	
SIZE	A3

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	☐
TITLE		
M12U-XP-FE-90 XP-M-90-XM		
MOLEX INCORPORATED		
DOCUMENT NO.		SHEET NO.
SD-120080-018		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200800391