


13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")								

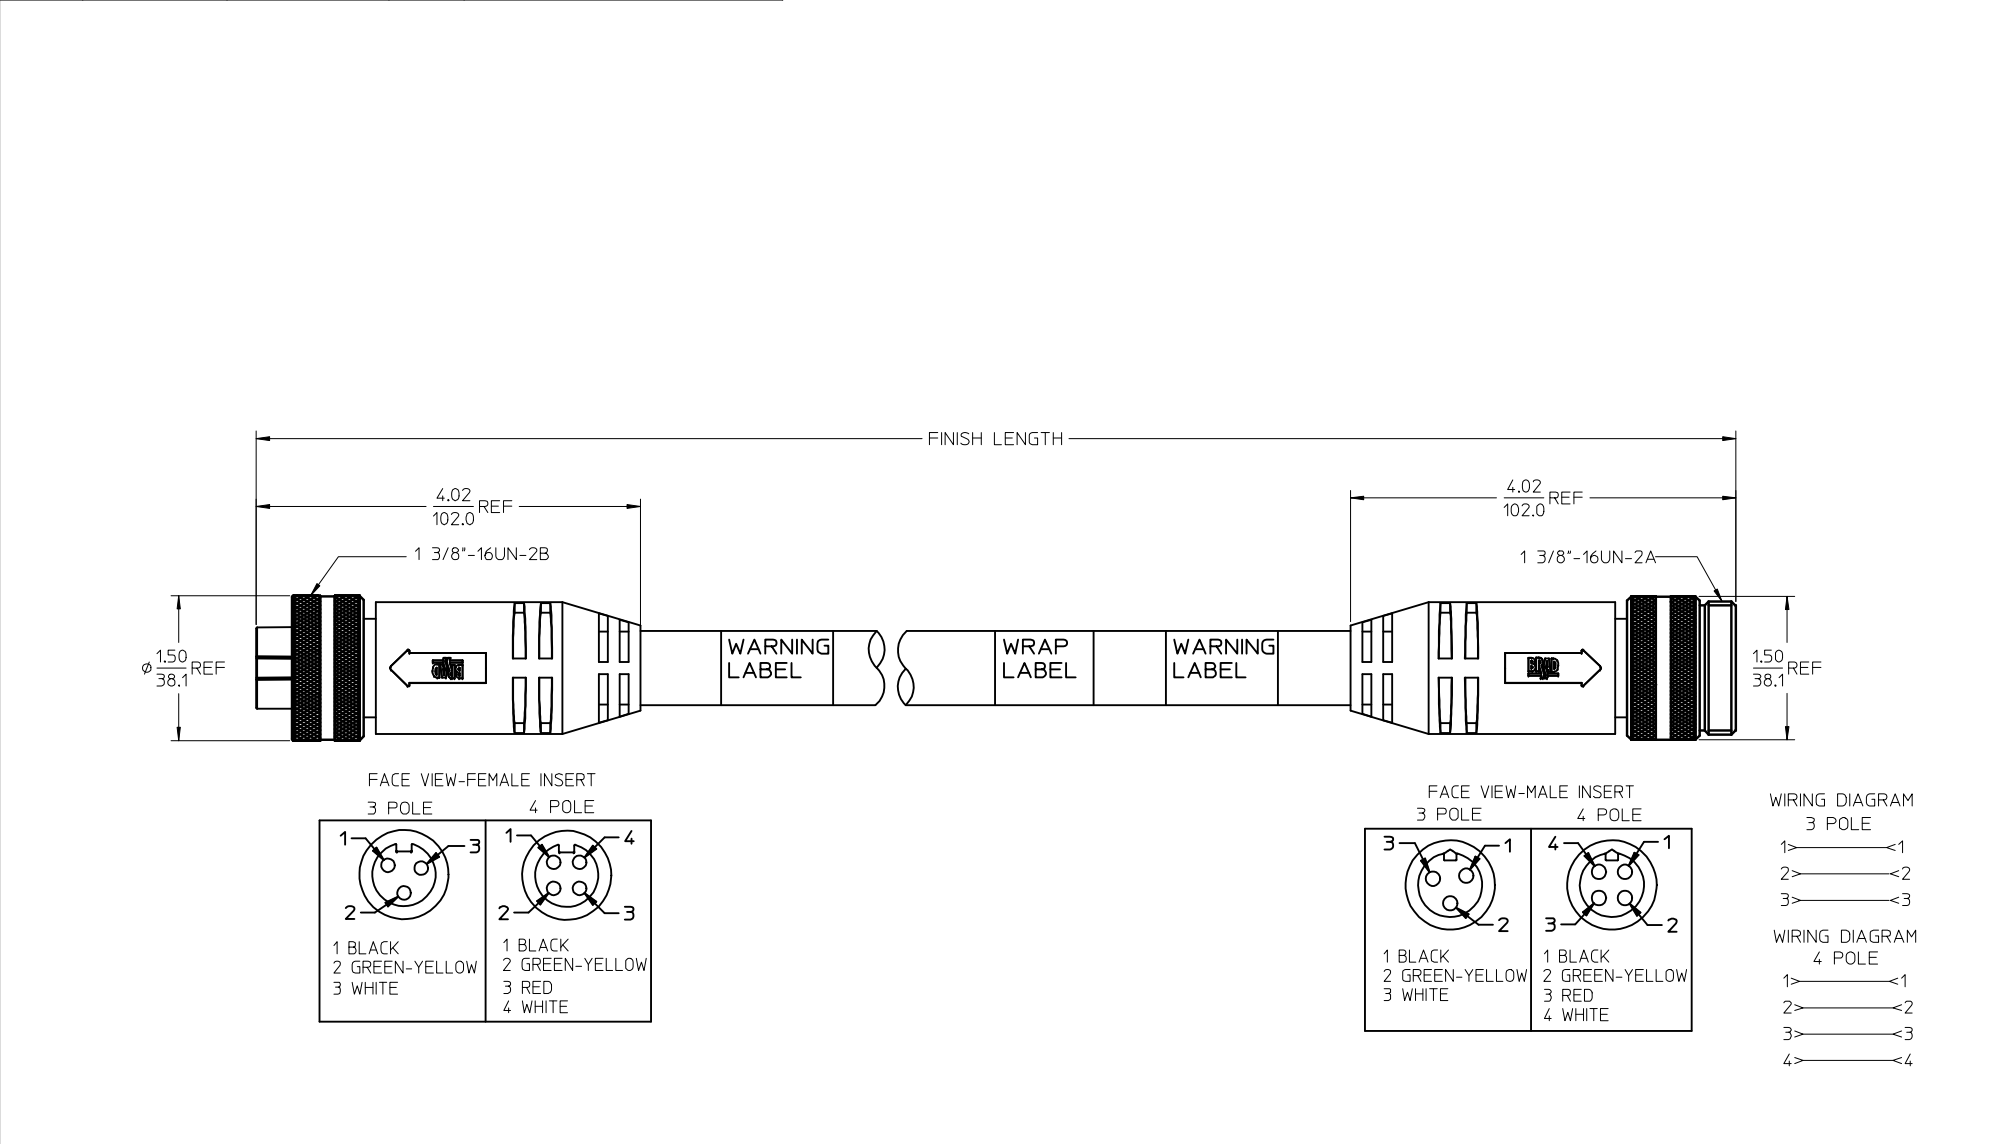

SPECS:

OVERMOLD: GRAY PVC

INSERT: BLACK PVC

COUPLING NUT: ANODIZED ALUMINUM

CABLE: #10AWG GRAY PVC

DUAL RATED UL TC/OPEN WIRING & STOOV

ELECTRICAL: 600V AC/DC

ADDED PART NUMBER EC NO: IPG2016-1155 DRWNGGUSTAFSON 2016/02/23 CHKD:MZIELINSKI 2016/03/15 APPR:BMWOODMAN 2016/02/23	REV DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± --- ± .010 1 PLACE ± --- ± .020 ANGULAR ± 1/2°	DIMENSION STYLE IN/MM DRAWN BY DATE B.RUPERT 01/12/10 CHECKED BY DATE B.WOODMAN 01/12/10 APPROVED BY DATE JFMURPHY 2010/01/15	SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
		SEE CHART					
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

QUICK CHANGE

FEMALE/MALE STRAIGHT

3 & 4 POLE AS PORTABLES

MOLEX INCORPORATED

DOCUMENT NO. SD-130064-065

SHEET NO. 1 OF 1

12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1300640074