

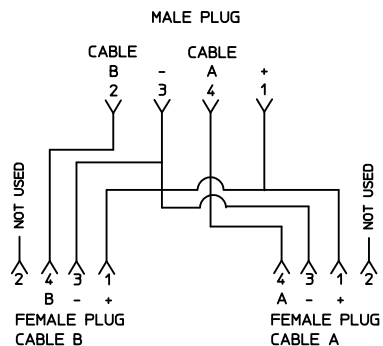


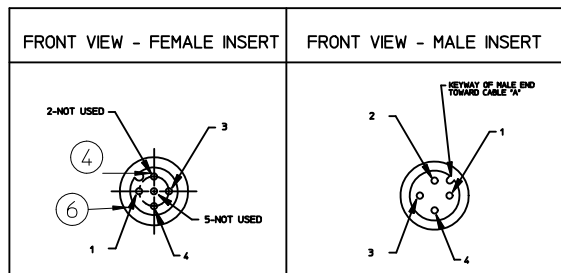

WIRING SCHEMATIC

VOLTAGE RATING:	300V
AMPERAGE RATING:	max. 4A
PROTECTION CLASS:	IP 68
OPERATING TEMPERATURE:	FLEXING -5°C TO +80 °C STATIC -30 °C TO +80 °C

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	ULTRA-LOCK	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au OVER Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE #22	PVC	YELLOW

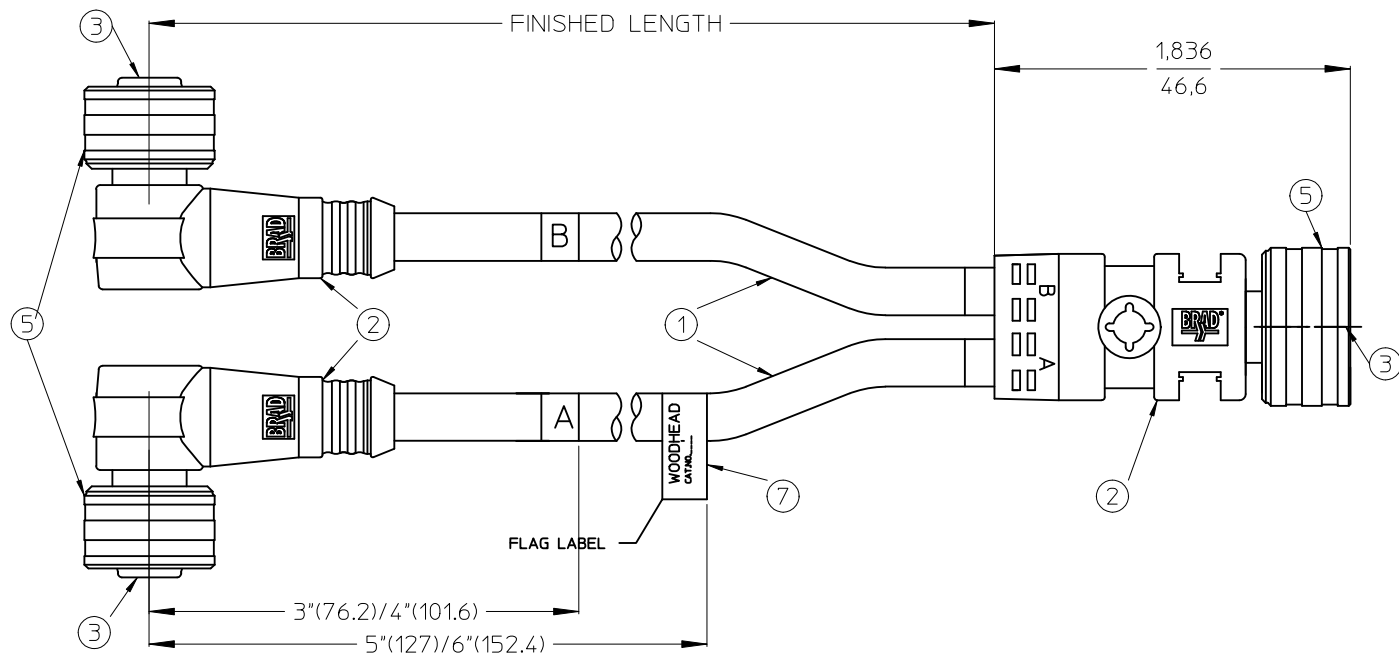

1200800008	WW4A31A09M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200800007	WW4A31A09M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200800006	WW4A31A09M006	1.97' +1.75" -0 [0.6M +44.5 -0]
1200800005	WW4A31A09M003	0.98' +0.75" -0 [0.3M +19.1 -0]
MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH

ENTER DESCRIPTION	EC NO: WEU2010-0333	2010/02/10	2010/02/11	2010/02/25
DRWN: APOHL WEU	CHKD: REISSNER	APPR: FPACHER		
1				

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± 0.1
1 PLACE	± 0.3	± ---
ANGULAR ± ---°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM		METRIC	
DRAWN BY	DATE	TITLE	
APOHL WEU	2010/02/10	MIC INL. SPLITTER XM	
CHECKED BY	DATE	PVC 90 DEGREE	
REISSNER	2010/02/11		
APPROVED BY	DATE		
FPACHER	2010/02/24		
MATERIAL NO.			
SEE NOTES			

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	
DRAWN BY	DATE	TITLE
APOHL WEU	2010/02/10	MIC INL. SPLITTER XM
CHECKED BY	DATE	PVC 90 DEGREE
REISSNER	2010/02/11	
APPROVED BY	DATE	
FPACHER	2010/02/24	
MATERIAL NO.		
SEE NOTES		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200800005