


10 9 8 7 6 5 4 3 2 1

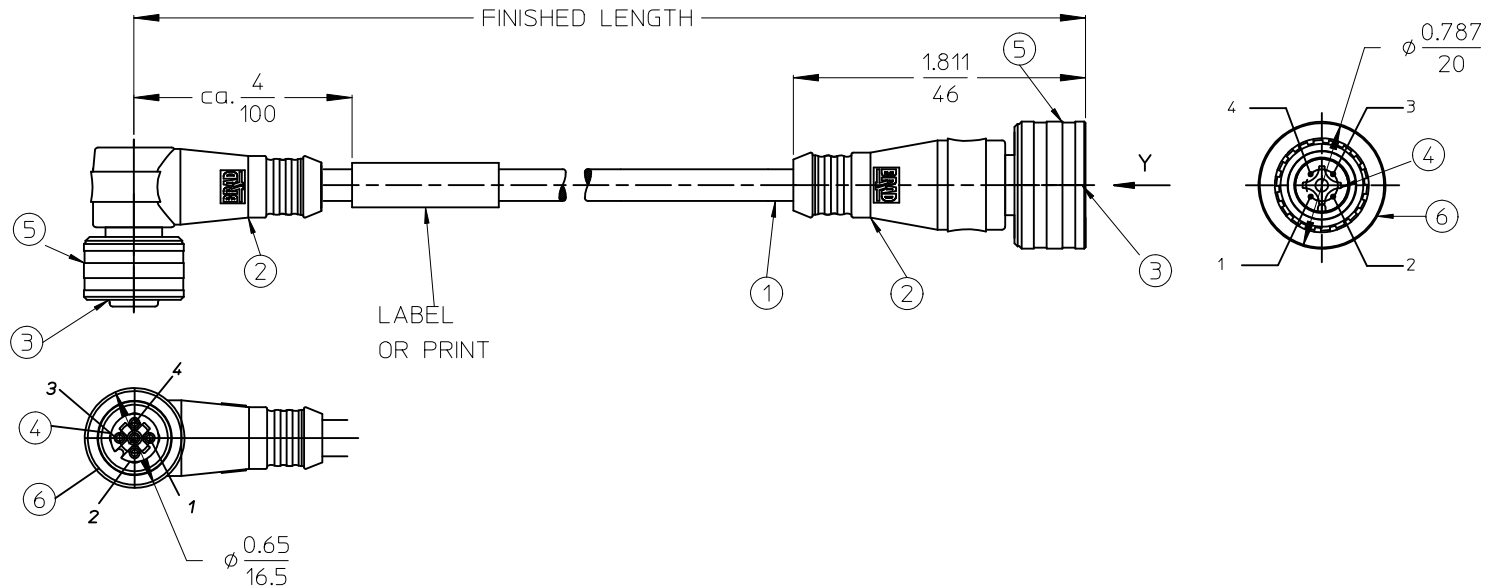

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200800286	WW3031K05M010	3.28' +2.19 -0 [1.0M +55.6 -0]
4	1200800300	WW4031K05M010	3.28' +2.19 -0 [1.0M +55.6 -0]

VOLTAGE RATING	300V
AMPERAGE RATING	4A
PROTECTION	IP 68
OPERATING TEMPERATURE	-30°C / +80 °C
UL CERTIFICATION	FILE NO. E152210
CAS CERTIFICATION	FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	SHELL	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au over Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PUR	YELLOW
1	CABLE #22	TPE	YELLOW

ENTER DESCRIPTION	EC NO: WEU2010-0333	2010/02/12	2010/02/12	2010/02/12	2010/02/12
	DRWN: APOHL_WEU				
	CHKD: REISSNER				
	APPR: FPACHER				
1					

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± 0.1
1 PLACE	± 0.3 ± ---
ANGULAR ± ---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
APOHL_WEU	2010/02/12
CHECKED BY	DATE
REISSNER	2010/02/12
APPROVED BY	DATE
FPACHER	2010/02/24
MATERIAL NO.	
SEE TABLE	
SIZE	A3

SCALE	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE M12U-XP-FE-90 XP-M-STR-XM			
MOLEX INCORPORATED			
DOCUMENT NO. SD-120080-025			SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9 8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

1200800286