

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.12	阿树

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X2508 W V-XX J-N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:XX-02~15Pin
⑤Special No:J-Ordinary plus long
⑥Material: N0-PA66 94V-0
⑦Planting:SN-Bright Tin Plating

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.50	09	20.00	25.00
03	5.00	10.00	10	22.50	27.50
04	7.50	12.50	11	25.00	30.00
05	10.00	15.00	12	27.50	32.50
06	12.50	17.50	13	30.00	35.00
07	15.00	20.00	14	32.50	37.50
08	17.50	22.50	15	35.00	40.00




X2508WV-XXJ-N0SN	Nylon 66	Brass	X2508H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	




DESIGN	阿树	VIEW:		MODEL TYPE:	2.50mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2508WV-XXJ-N0SN
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1

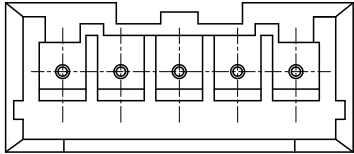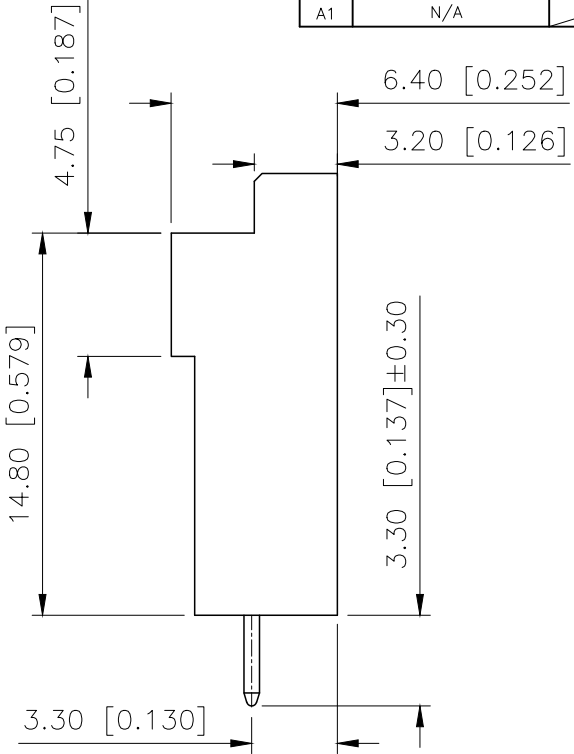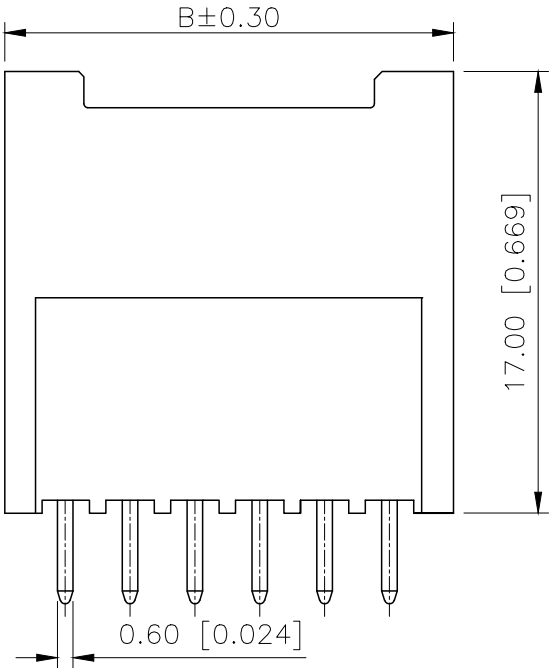

02~05 Pin
Ø0.90 [Ø0.035]

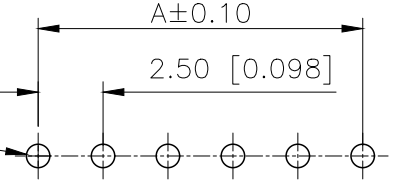

PCB Layout

