


KEMET Part Number: ALS80A163KF100
(A381LM163M100A)

ALS80, Aluminum Electrolytic, 16,000 uF, 20%, 100 VDC, -40/+105°C

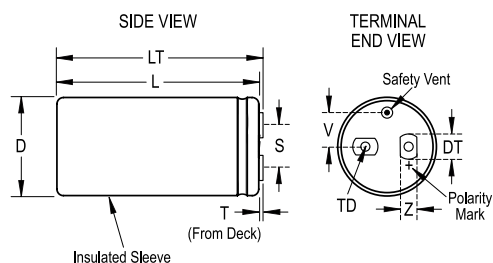

General Information

Supplier:	KEMET
Series:	ALS80
Dielectric:	Aluminum Electrolytic
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
AEC-Q200:	No
Notes:	Dimensions D And L Include Sleaving. MS (MxH) = M12x16. Mounting Clip (Sold Separately): V4/2737

Dimensions

D	51mm +/-1mm
L	105mm +/-2mm
T	5.5mm +/-0.5mm
S	22.2mm +/-0.5mm
DT	13mm +/-0.5mm
LT	110.5mm NOM
TD	10mm MIN
V	13.7mm NOM
Z	10mm NOM

Packaging Specifications

Weight:	300 g
Sleaving:	Yes
Packaging:	Tray

Specifications

Capacitance:	16,000 uF
Capacitance Tolerance:	20%
Voltage DC:	100 VDC, 115 VDC (Surge)
Temperature Range:	-40/+105°C
Rated Temperature:	105°C
Life:	7000 Hrs (Rated Voltage And Ripple Current At 105C), 11000 Hrs (Rated Voltage At 105C)
Resistance:	23 mOhms (100Hz 20C), 19 mOhms (10kHz 20C)
Ripple Current:	14.7 Amps (100Hz 105C), 17.8 Amps (10 kHz 105C)
Leakage Current:	4800 uA