

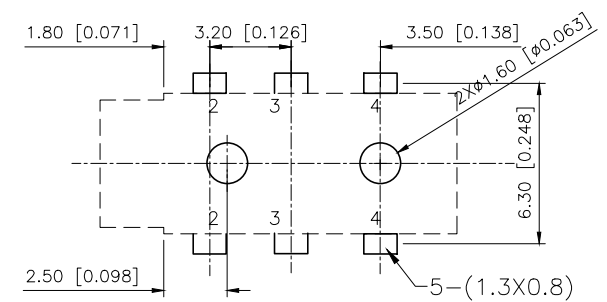
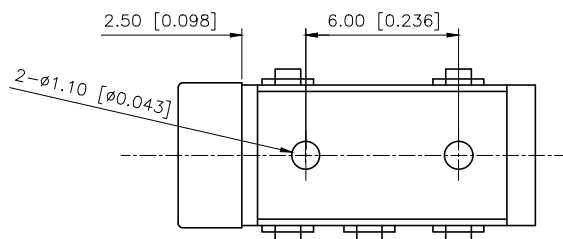
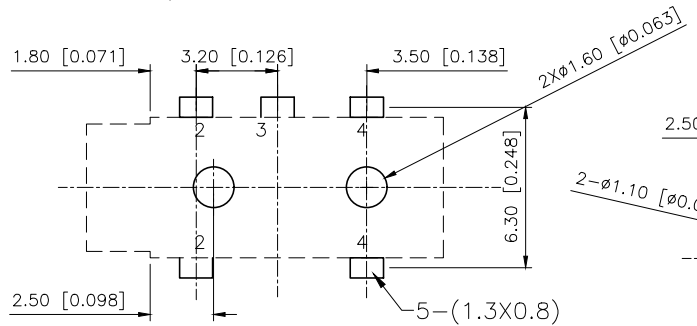
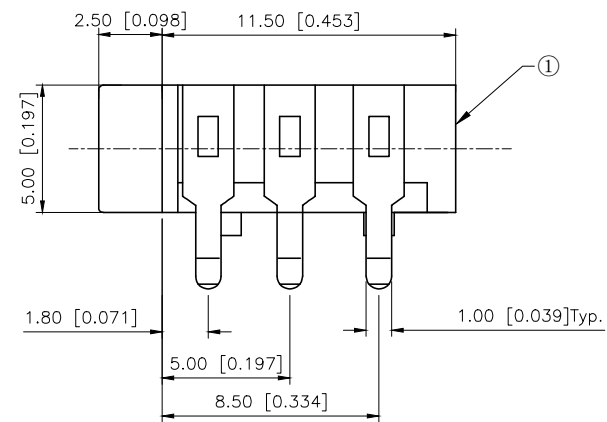
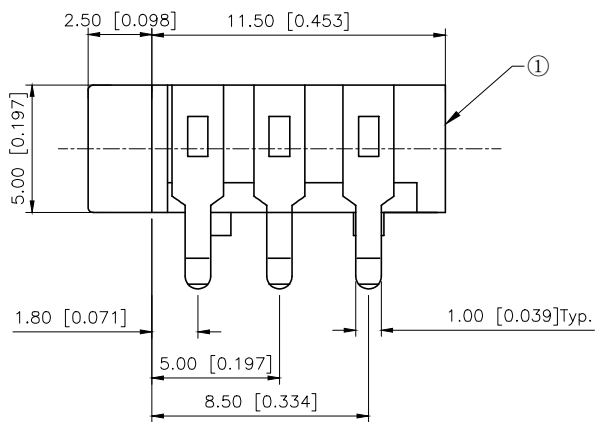


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

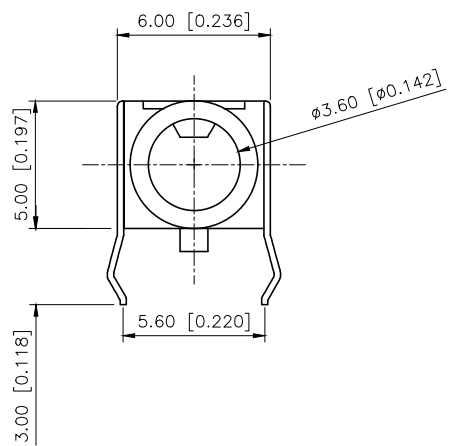

PJ-3135-X

PJ-3136-X

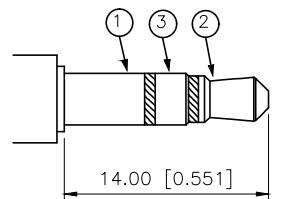

ø3.50 MATE PLUG

SPECIFICATION
1.Rating: DC 30V 0.5A
2.Contact resistance: ≤30mΩ
3.Insulation resistance: ≥100mΩ
4.Withstand voltage: 500VAC
5.Insertion and extraction force: 3-20N
6.life test: 5,000 cycles

Model No.	PJ-3135-X	PJ-3136-X
Schematic		
Color	R:red G: Green W:white B:Black Y:Yellow T:transparent	

Plastic	PBT	
Terminal 4	Phosphor Bronze	TIN
Terminal 3	Phosphor Bronze	TIN
Terminal 2	Phosphor Bronze	TIN
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-313X-X
APPROVED		SIZE:	A4	DWG NO.:	