
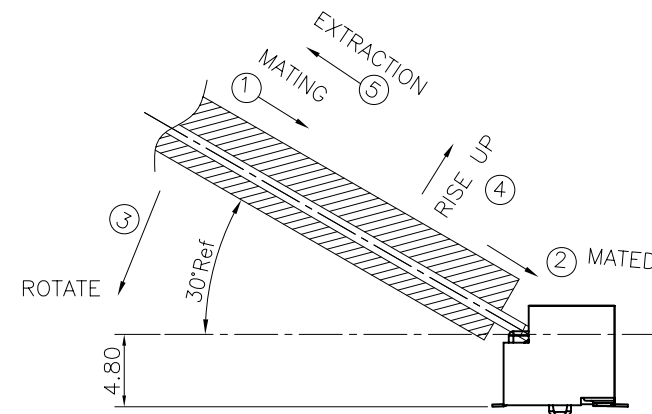


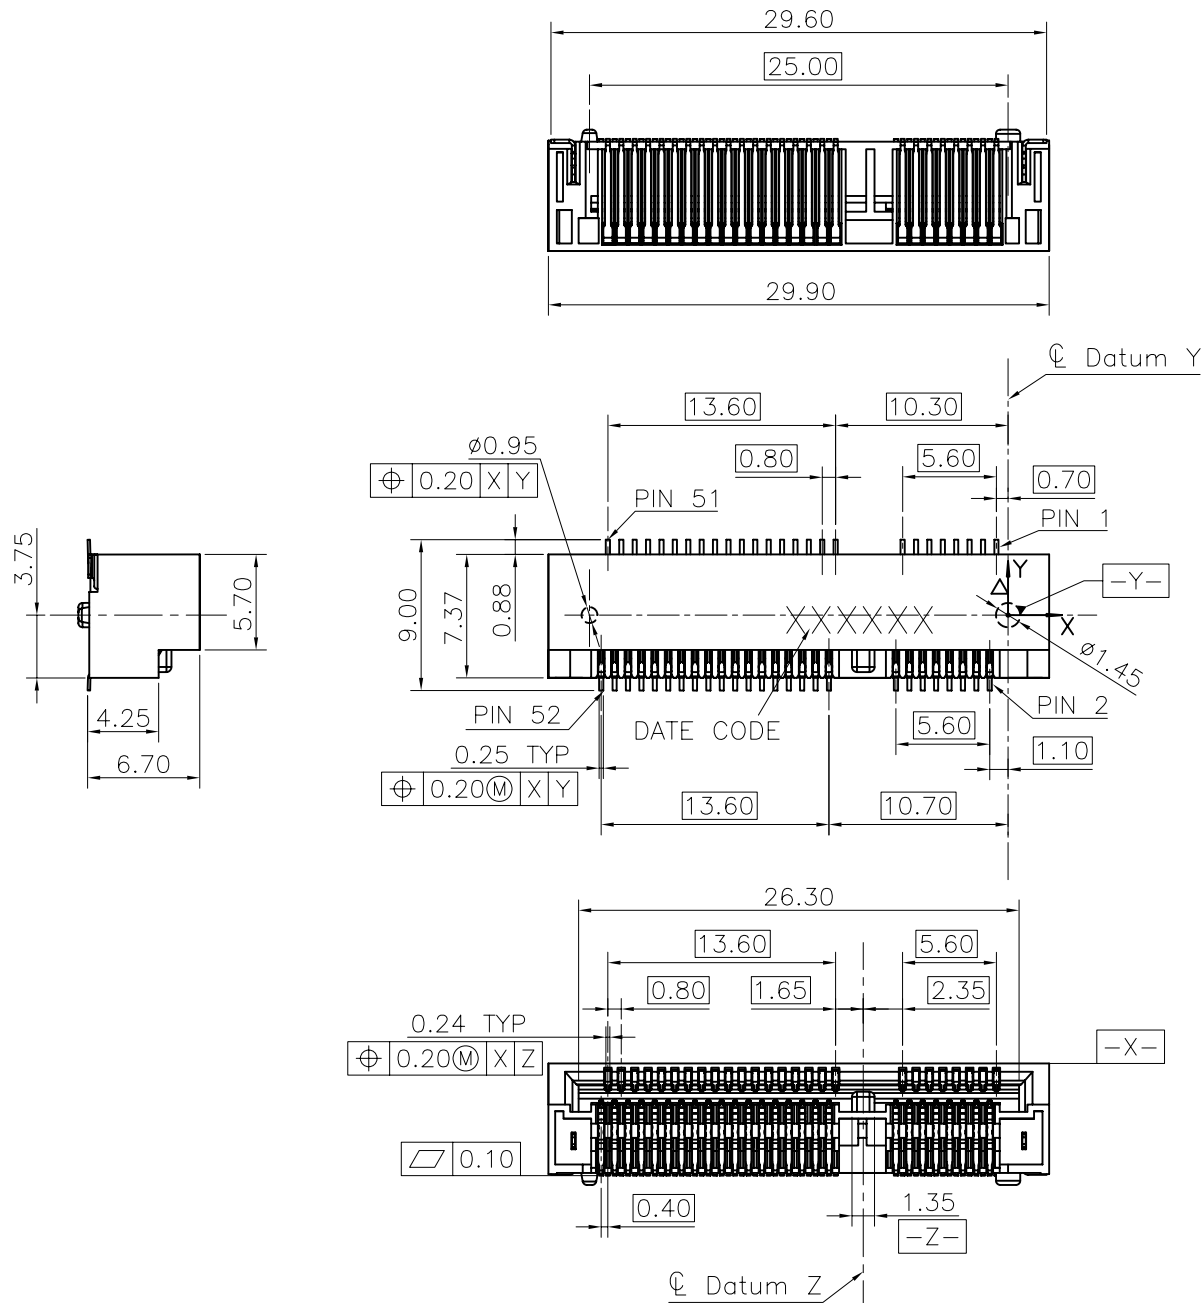

## HOW TO MATE AND UNMATE

MATE: (1)  $\longrightarrow$  (3)

UNMATE: (4)  $\longrightarrow$  (5)

1. Datum X is the top surface of Product
2. (1) The horizontal axis for the pattern is established by a line through the center of the  $\varnothing 1.45$  and  $\varnothing 0.95$  posts.  
(2) The vertical axis is  $90^\circ$  to the horizontal axis, through the center of datum Y.



深圳市华宇创精密电子有限公司

|                                                                                                          |  |                   |                      |                 |                   |
|----------------------------------------------------------------------------------------------------------|--|-------------------|----------------------|-----------------|-------------------|
| TOLERANCE:                                                                                               |  | DRAWN BY :<br>陈一鸣 | DATE :<br>2014-02-23 | PART NAME:      |                   |
| X.X     ±0.30<br>X.XX   ±0.25<br>X.XXX   ±0.15<br><br>X.* ±2*    X.X* ±0.5*                              |  |                   |                      | MINI PCI-E 6.7H |                   |
| <br>UNIT: mm [inch] |  | CHECKED BY:       | DATE :               | PART NO.        | HYCW03-PC152-670E |
|                                                                                                          |  | 马跃                | 2014-02-23           | MOLD NO.        |                   |
| SCALE: 1:1    SIZE: A4                                                                                   |  | APPROVED BY:      | DATE :               | DRAW NO:        | HYC-PC117032719   |
|                                                                                                          |  | 邱敏                | 2014-02-23           | SHEET NO.       | 1 OF 1            |

C



C

C






C

- C


C



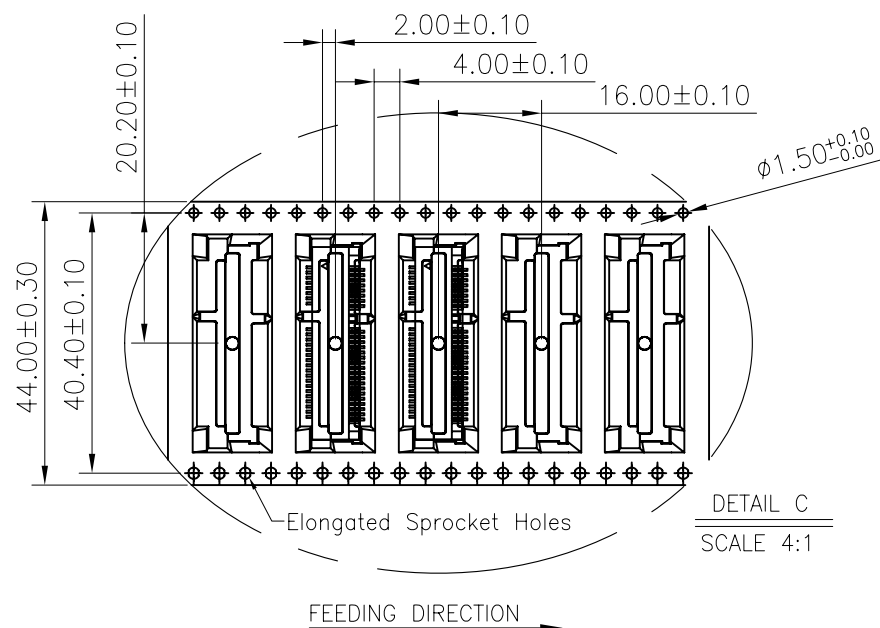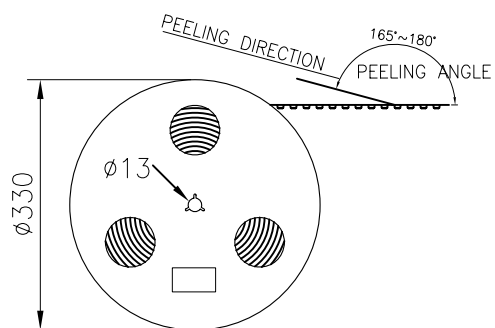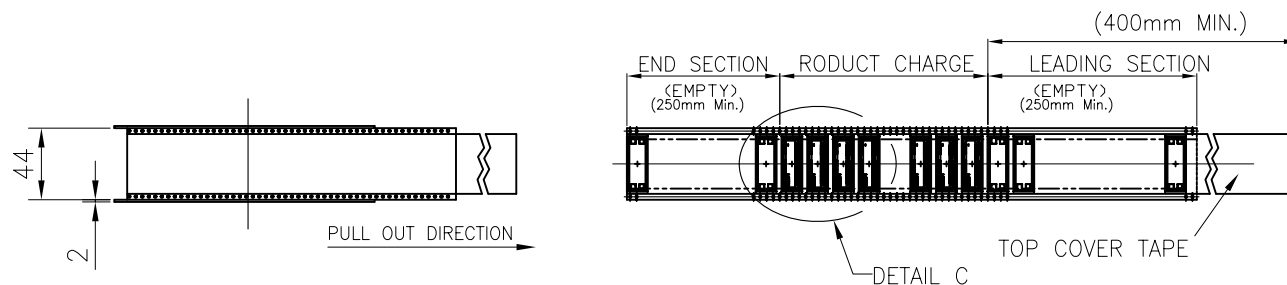

## NOTES:

1. MATERIAL :
  - 1.1 CARRY TAPE: PS
  - 1.2 COVER TAPE: PET
  - 1.3 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION :
  - 2.1 REEL: W=44.5, φA=330
  - 2.2 SHIPPING CARTON: L=335, W=335, H=320 (INNER)
3. QUANTITY :
  - 3.1 PRIMARY PACKING: 450 PCS/REEL
  - 3.2 SECONDARY PACKING: 6 REELS/CARTON(2700PCS)
4. PEELING RESISTANCE: 20gf~120gf.
5. PEELING SPEED: 300mm/minutes.

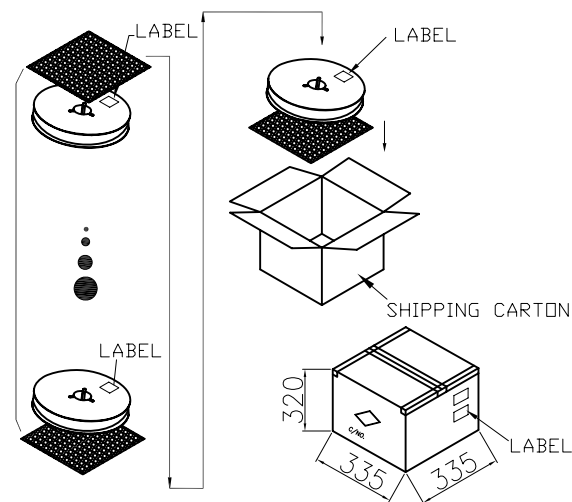

深圳市华宇创精密电子有限公司

|                                                                           |                    |                      |                   |        |
|---------------------------------------------------------------------------|--------------------|----------------------|-------------------|--------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X' ±2" X.X' ±0.5" | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>包装图 |        |
|                                                                           | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.          |        |
| UNIT: mm [inch]<br>SCALE:1:1 SIZE: A4                                     | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | MOLD NO.          |        |
|                                                                           |                    |                      | DRAW NO:          |        |
|                                                                           |                    |                      | SHEET NO.         | 1 OF 1 |