



Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Connector System: **Wire-to-Wire**
Number of Positions: **2**
Connector & Housing Type: **Housing for Female Terminals**
Centerline (Pitch): **4.5 mm [.177 in]**
Sealable: **Yes**

[All AMPSEAL 16 Housings \(224\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------



Nominal Voltage Architecture	250 V
------------------------------	-------

Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.6 mm[.063 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF15
Centerline (Pitch)	4.5 mm[.177 in]

Dimensions

Connector Height	37.5 mm[1.48 in]
Product Width	23.5 mm[.925 in]
Product Length	20.3 mm[.799 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Degree of Protection	IP67
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Quantity	600
Packaging Method	Bag

Other

Connector Position Assurance Capable	No
--------------------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-AM7801-CH8172
[AMPSEAL 16 Housings](#)

Also in the Series | AMPSEAL 16



[Automotive Connector Caps & Covers \(3\)](#)

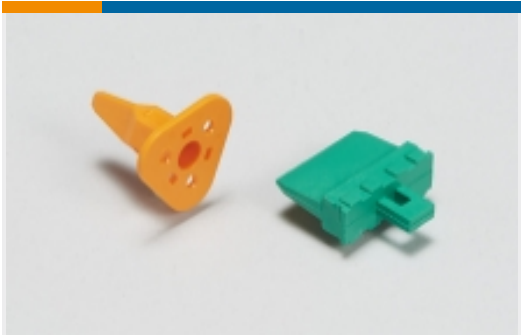

[Automotive Connector Locks & Position Assurance\(2\)](#)



[Automotive Housings\(244\)](#)



[Automotive Terminals\(35\)](#)



[Connector Backshells\(84\)](#)



[Connector Seals & Cavity Plugs\(4\)](#)



[Data Connectivity Headers\(2\)](#)



[Data Connectivity Housings\(3\)](#)



[Other Automotive Connector Accessories\(11\)](#)


Customers Also Bought



TE Part #HDP24-24-16PE-L017
[REC, 16P, BLK, E, RNG, 12, P](#)



TE Part #2098251-1
[AMPSEAL 16 CONTACTS](#)

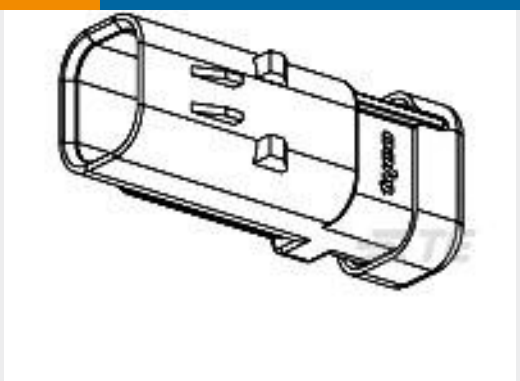

TE Part #776534-1
[AS16,CAP ASSY,ST,02P,E SEAL,CODE A](#)



TE Part #967558-1
[J-P-T GEH 24P,ASSY](#)





TE Part #K1129539
Relay 30-313-11-925



TE Part #C34252-000
ES1000-NO.3-B8-X-55MM



TE Part #0830956003
RBK-85-NR5100/A-X-12MM



TE Part #5053296124
RNF-100-1-0-50MM

Documents

Product Drawings

PLUG ASSY 120, AMPSEAL16 RESIST PLUG

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2040278-2_C_c-2040278-2-c.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2040278-2_C_c-2040278-2-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2040278-2_C_c-2040278-2-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

Product Specifications

Product Specification

English

Agency Approvals

UL Report

English