

1178143

https://www.phoenixcontact.com/us/products/1178143

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Power, 4-position, Socket, straight, M12, coding: S, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 1 m, 1.31 mm 2 , UL/cUL stranded hook-up wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238590

Your advantages

- · For compact devices: transmit high power in a confined space
- · Protection against mismatching thanks to S-coding
- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1178143
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB24
Product key	ABQCHG
GTIN	4063151212919
Weight per piece (including packing)	88.1 g
Weight per piece (excluding packing)	79 g
Customs tariff number	85444290
Country of origin	DE



1178143

https://www.phoenixcontact.com/us/products/1178143

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery
General	Contact connection method: Crimp connection

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use.



1178143

https://www.phoenixcontact.com/us/products/1178143

	The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	 Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Mounting	
Mounting type	Rear mounting M16 x 1.5 With flat nut
Thread type	()
Assembly note	With flat nut
Product properties	
Product type	Circular connectors (device side)
Sensor type	Power
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	S
Thread type	M12
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3
Dogist of political	
Material specifications	
Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA
Material for screw connection	CuZn alloy, nickel-plated
Conductor material	Bare Cu litz wires
Electrical properties	
Rated voltage in acc. with IEC 61076-2-101	630 V
Rated surge voltage	6 kV
	6 kV AC
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	630 V
Nominal current I _N	12 A



1178143

https://www.phoenixcontact.com/us/products/1178143

Test voltage	6 kV		
Connection data			
Conductor connection			
Connection method	Individual wires		
Contact connection type	Socket		
Conductor cross section	1.31 mm ²		
Tightening torque	3 Nm 4 Nm (M12 connector)		
lechanical properties			
Mechanical data			
Insertion/withdrawal cycles	> 100		
Connector			
Connection 1			
Head design	Socket		
Head cable outlet	straight		
Head thread type	M12		
Coding	S		
Connection 2			
Head design	free cable end		
cable/line			
Cable length	1 m		
Cable type	UL/cUL stranded hook-up wire		
Signal type/category	Power		
Wire diameter incl. insulation	2.2 mm		
Single wire, color	black 1, black 2, black 3, green/yellow		
Cable cross section	1.31 mm²		
Conductor material	Bare Cu litz wires		
AWG signal line	16		
Material wire insulation	mPPE		
Halogen-free	yes		
Flame resistance	in acc. to UL 1581 VW1		
Ambient temperature (operation)	-40 °C 105 °C (cable, fixed installation)		
	-20 °C 105 °C (Cable, flexible installation)		
nvironmental and real-life conditions			
Ambient conditions			
Degree of protection	IP67		
	IP65/IP67		



1178143

https://www.phoenixcontact.com/us/products/1178143


Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-20 °C 105 °C (Cable, flexible installation)
	-40 °C 105 °C (cable, fixed installation)
Standards and regulations	
Otandards and regulations	
Flame resistance	in acc. to UL 1581 VW1
M40	
M12	
Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111
Note	In line with




1178143

https://www.phoenixcontact.com/us/products/1178143


Drawings



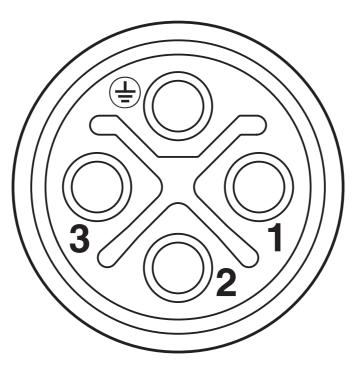

Pin assignment of M12 socket, 4-pos., S-coded, socket side view

Circuit diagram

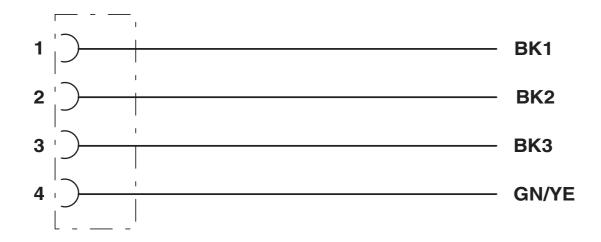



1178143

https://www.phoenixcontact.com/us/products/1178143

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1178143

. 91	cUL Recognized Approval ID: E468743-2	0190917			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		600 V	12 A	16 - 16	-

71	UL Recognized Approval ID: E468743-20	0190917			
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		600 V	12 A	16 - 16	-

cULus Recognized



1178143

https://www.phoenixcontact.com/us/products/1178143

Classifications

UNSPSC 21.0

ECLASS

27440102
27440116
27440116
EC002635

39121400



1178143

https://www.phoenixcontact.com/us/products/1178143

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	193d1021-82d4-4c96-8e39-e500913fc70f

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com