Positive Lock | Positive Lock 187

TE Internal #: 1717269-1


Insulation Sleeve, Flag, PVC, Blue, Bag, -40 – 60 °C [-40 – 140 °F],

Positive Lock 187, Insulation Boots & Sleeves

View on TE.com >



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Insulation Boots & Sleeves

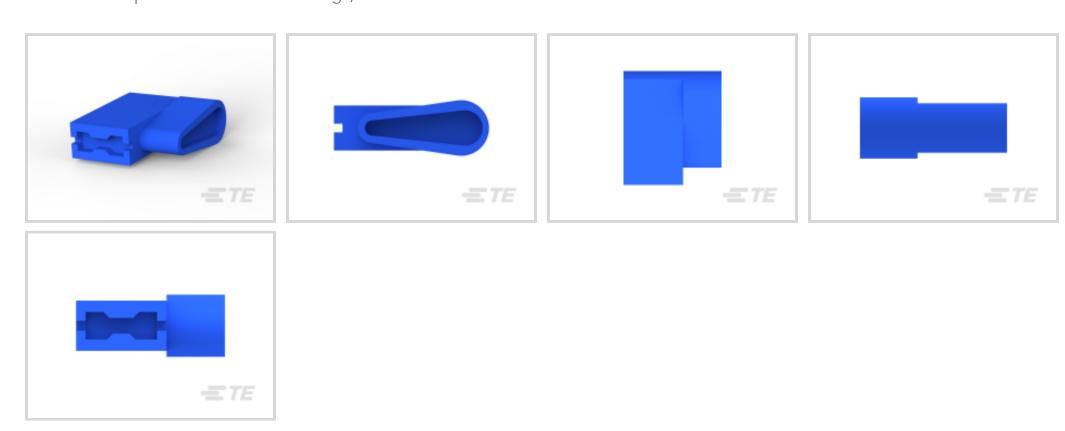

Insulation Boot & Sleeve Product Type: Insulation Sleeve

Terminal Orientation: Flag
Primary Product Material: PVC
Primary Product Color: Blue
Packaging Method: Bag

Features

Product Type Features

Troduct Type realures	
Insulation Boot & Sleeve Product Type	Insulation Sleeve
Configuration Features	
Number of Positions	1
Body Features	
Primary Product Material	PVC
Primary Product Color	Blue
Contact Features	
Terminal Orientation	Flag
Dimensions	
Product Length	14.5 mm[.57 in]
Usage Conditions	
Operating Temperature Range	-40 - 60 °C[-40 - 140 °F]
Industry Standards	

UL 94V-2

UL Flammability Rating



Packaging Features	
Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: MCCP (.2% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts







Also in the Series | Positive Lock 187



Crimp Terminal Housings(86)



Insertion & Extraction Tools(2)



Insulation Boots & Sleeves(7)



Quick Disconnects(57)

Customers Also Bought



TE Part #DTM06-3S-E004
DEUTSCH DTM Housings



TE Part #DTP06-4S-C015 PLG, 4P, GRY, E



TE Part #2-33460-2 TERMINAL,SOLIS R 8 10



TE Part #1062-20-0322 SOC, SF, SIZE 20, 16-22, SLEVLESS, NI /NI




TE Part #CZ8201-000 SCL-1/2-0-2.25IN



TE Part #A23899-000 TAT-125-1-0-1.5IN



TE Part #2-33459-6
TERMINAL, SOLIS R 12-10 5/16

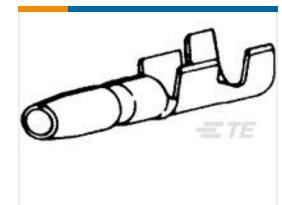

TE Part #60766-2 SHUR PLUG .156 18-14 AWG PTPBR





Documents

Product Drawings

PL EX 187 INSULATED FLAG REC PVC V-0

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1717269-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1717269-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1717269-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.