


6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	901420010	CGrid Crp Conn Hsg DR FL Polz 10Ckt		1	PC
B	901190109	CGrid Term Fem Crp LFH SnA 2224AWG		10	PC
C	--	PAPER PRINTED PAPER WHITE		1	PC

TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196591102	150±8	15	CGRID III R-S 10ckt 150mm disc Sn
2196591103	300±10	15	CGRID III R-S 10ckt 300mm disc Sn
2196591104	600±10	15	CGRID III R-S 10ckt 600mm disc Sn

3		2		1	
FROM	TO	DESCRIPTION		COLOR	
A1	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A2	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A3	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A4	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A5	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A6	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A7	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A8	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A9	--	1X22AWG DISC MPPE BK UL11028		BLACK	
A10	--	1X22AWG DISC MPPE BK UL11028		BLACK	

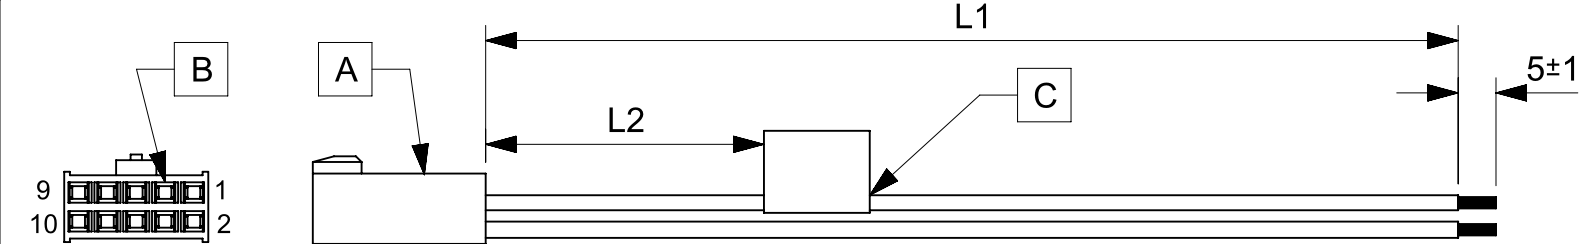

REFER DETAIL A

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

- NOTES
1. Connector view shown is from mating side.
 2. Label text must be 2mm max. in height with Arial font.
 3. Label must be wrapped in Flag type on a single cable.
 4. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning Dia must be 0.9 mm Max.

REVISION				
DATE	REV	DESCRIPTION	CHANGER	
2021/12/27	A	INITIAL RELEASE	SAIKIG	
DOCUMENT STATUS	P1	RELEASE DATE	2022/01/13	11:15:21

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	GENERAL TOLERANCES (UNLESS SPECIFIED)	
DIVISIONAL SYMBOLS	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
DIVISIONAL SYMBOLS	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
	DRAWING	SERIES
A4-SIZE		219659
MATERIAL NUMBER		CUSTOMER
SEE TABLE		GENERAL MARKET
SHEET NUMBER		1 OF 1