
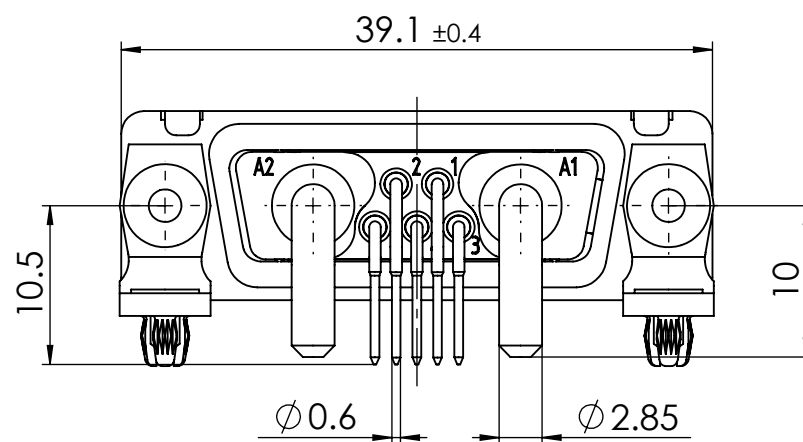
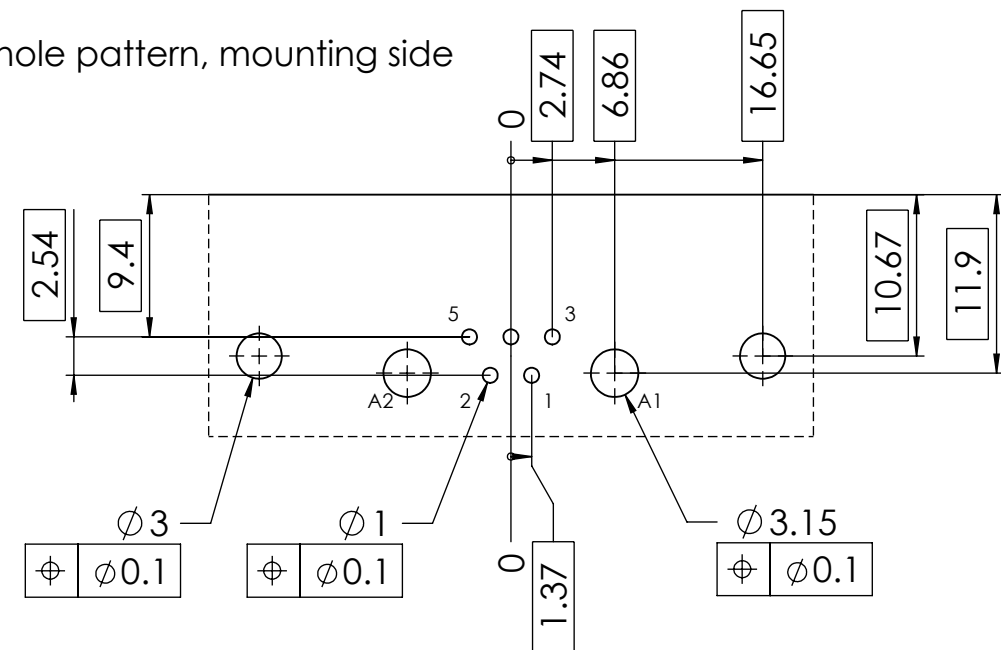
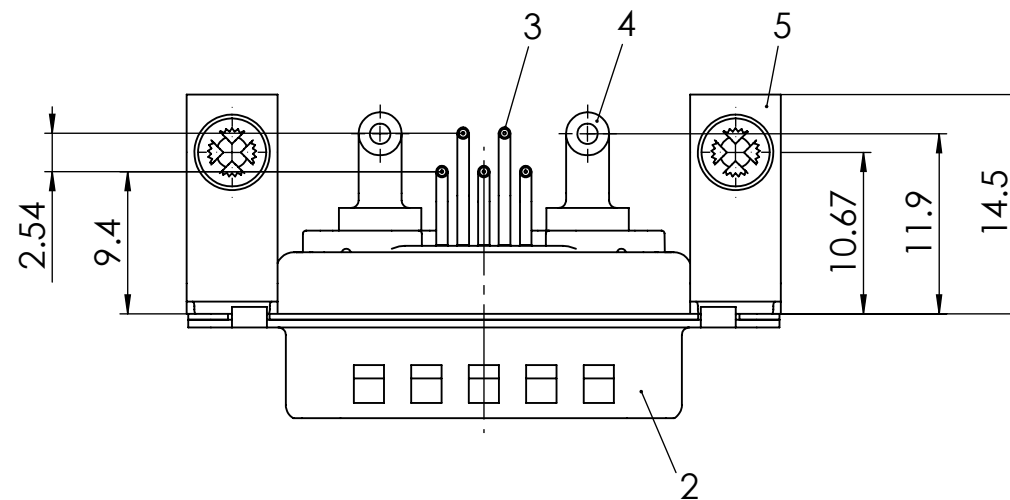
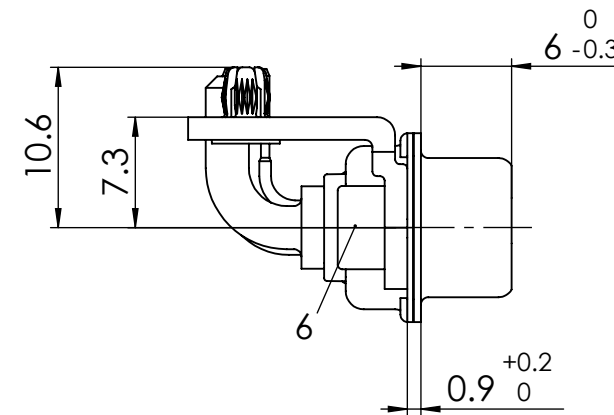


RoHS compliant
by exemption

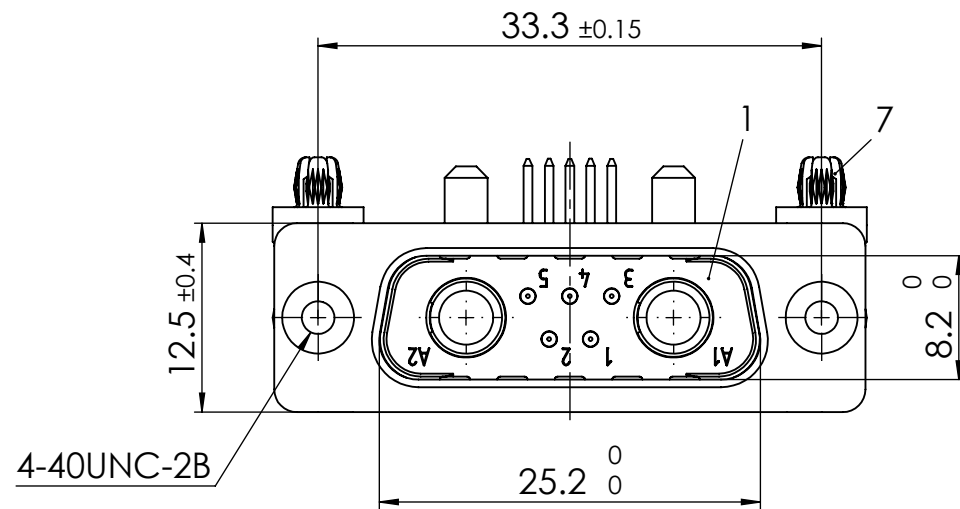

7	2	Snap-in rivet	PCB 1.6mm / Brass	tin plated
6	2	Clinch nut	4-40 / Steel	tin plated
5	2	Bracket	F1080-13B / Steel	tin plated
4	2	High power contact	FMP180P104R	20A
3	5	Signal contact	P25 / Brass	0.8µm Au
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS		SCALE		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m			molex FCT D-Sub Mixed-Layout Connector				
	mm		2:1									
					CURRENT REVISION							
					DRWN: DRAWN BY msteinbrueck 05-09-2023							
					APPR: APPR BY mteubel 15-09-2023							
	2		24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING				
	1				DRWN: DRAWN BY Denzinger 05-05-2003			MATERIAL NUMBER				
REV.		CH.-NO.		APPR: APPR BY aschiekofer 05-05-2003			1731071120					
							REVISION					
							2					
REPLACEMENT FOR:			FRIST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER			CUSTOMER		SHEET NUMBER
1731071120_Rev. A1					A3-SIZE		FM7W2P25-1909			GENERAL MARKET		1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.