
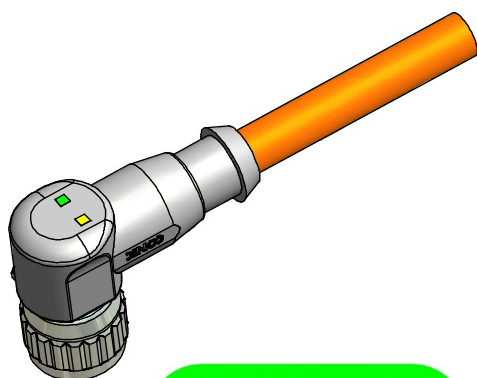



Technical specification:

Rated voltage: IEC 61076-2-101	4pos 30 V
Current rating: IEC 61076-2-101	4A at 40°C
Insulation resistance: IEC 60512-2	>=10 GΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range: IEC 60664-1	-30°C ... +80°C
Mating cycles: IEC 60512-9a	<=100

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	TPU GF, UL 94
Sealing:	FPM
Coupling nut:	CuZn, nickel plated
Moulding body:	TPU, UL 94, translucent



Directive 2002/95/EC
„RoHS“
Compliant


Part no:	Description:	Length L:	Cable:
43-10880	SAL - 12 - RKW5.2 - 2L - 2 / J1	2m	TPU, UL 20549, orange, 4x0,34mm ²
43-10881	SAL - 12 - RKW5.2 - 2L - 3 / J1	3m	
43-10882	SAL - 12 - RKW5.2 - 2L - 5 / J1	5m	
43-10883	SAL - 12 - RKW5.2 - 2L - 10 / J1	10m	

DO NOT ALTER CAD
DRAWING BY HAND

Version: 11.03.09 fro

tolerance: ISO 2768-m

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH



dim. in mm

	date	name
drawn	08.03.07	Burschik
appd.	08.03.07	Mankopf

CONEC®

title:

**Female connector M12x1
angled with LED**

dwg no:

Inventor 10

43K1A474

part no: