





1. ACCEPTS #4 SELF TAPPING THREAD FORMING SCREWS OR METRIC EQUIVALENT. DRIVE TO 0.6 N-m MAX
2. DATE CODE TO BE BRANDED IN THIS LOCATION PER TE SPEC 102-60. USE 5 DIGIT CODE: FIRST 2 DIGITS = YEAR, SECOND 2 DIGITS = WEEK, LAST DIGIT = DAY.
3. MATERIALS: HEADER HOUSING - GLASS FILLED PBT
PINS - TIN OR GOLD PLATED BRASS
4. HOUSING COLORS ARE MECHANICALLY KEYED TO MATE ONLY WITH IDENTICALLY COLORED PLUG ASSEMBLIES.
5. HEADER MATES TO PLUG ASSEMBLY 776273 WHICH USES REELED TERMINAL 770520 OR LOOSE PIECE TERMINAL 770854

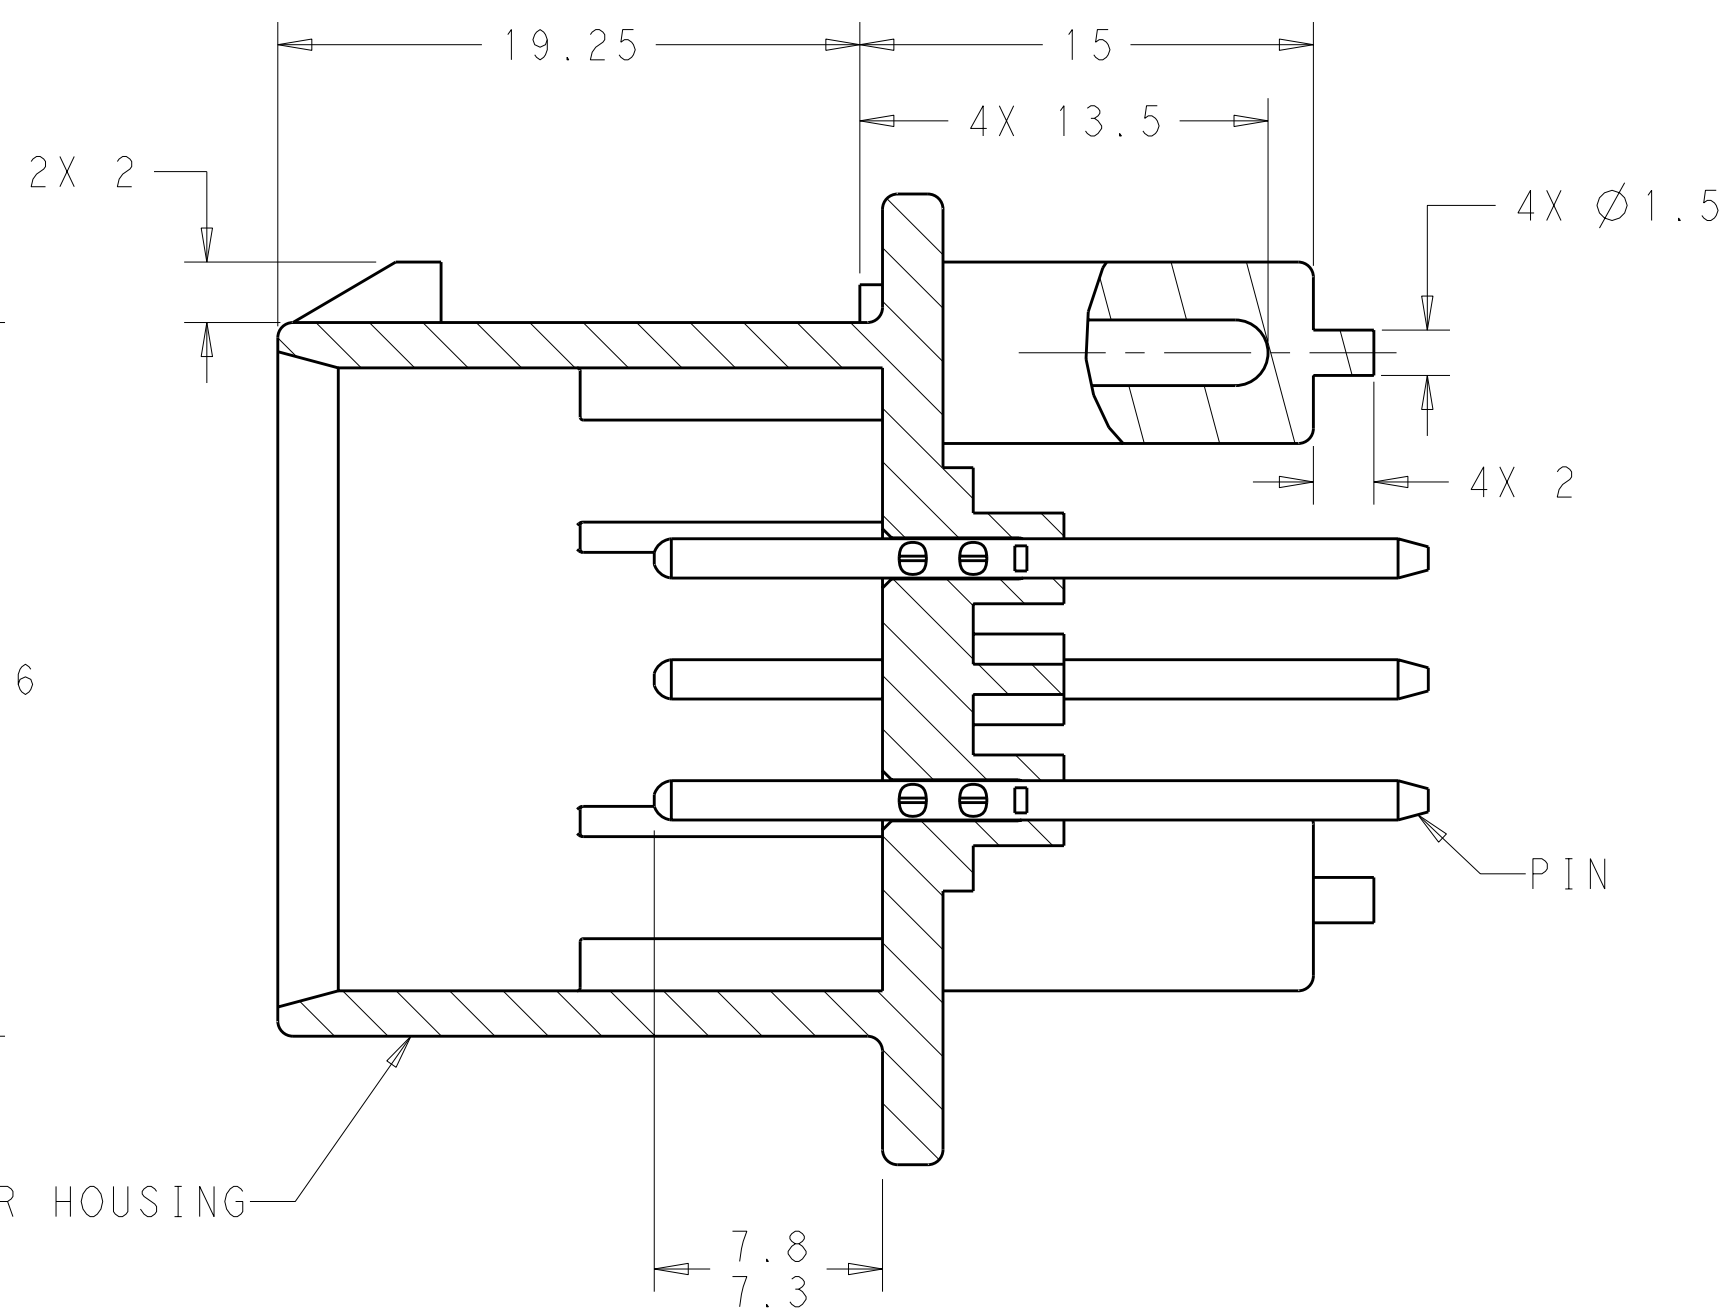


NATURAL	DURAGOLD	1-776375-2
BLACK	DURAGOLD	1-776375-1
NATURAL	TIN	776375-2
BLACK	TIN	776375-1
HEADER COLOR 	PLATING	PART NUMBER

REV 012	STE		TE CONNECTIVITY	
R2012	OBSCLETE NO LONGER LATEST REVISION			
R2012				
NAME	HEADLE ASSEMBLY			
	14 POSITION, HIGH TEMPERATURE VERTICAL, AMPSPAL			
SUB	CAGE CODE	DRAWING NO.	RESTRICTED TO	
A1	100779	C-779375	-	
5	SCALE	2:1	SHEET	1 OF 2 REV A


LOC		DIST		REVISIONS					
GE		00		REV	LYR	DESCRIPTION	DATE	OWN	APVD
				-	-	SEE SHEET 1	-	-	-

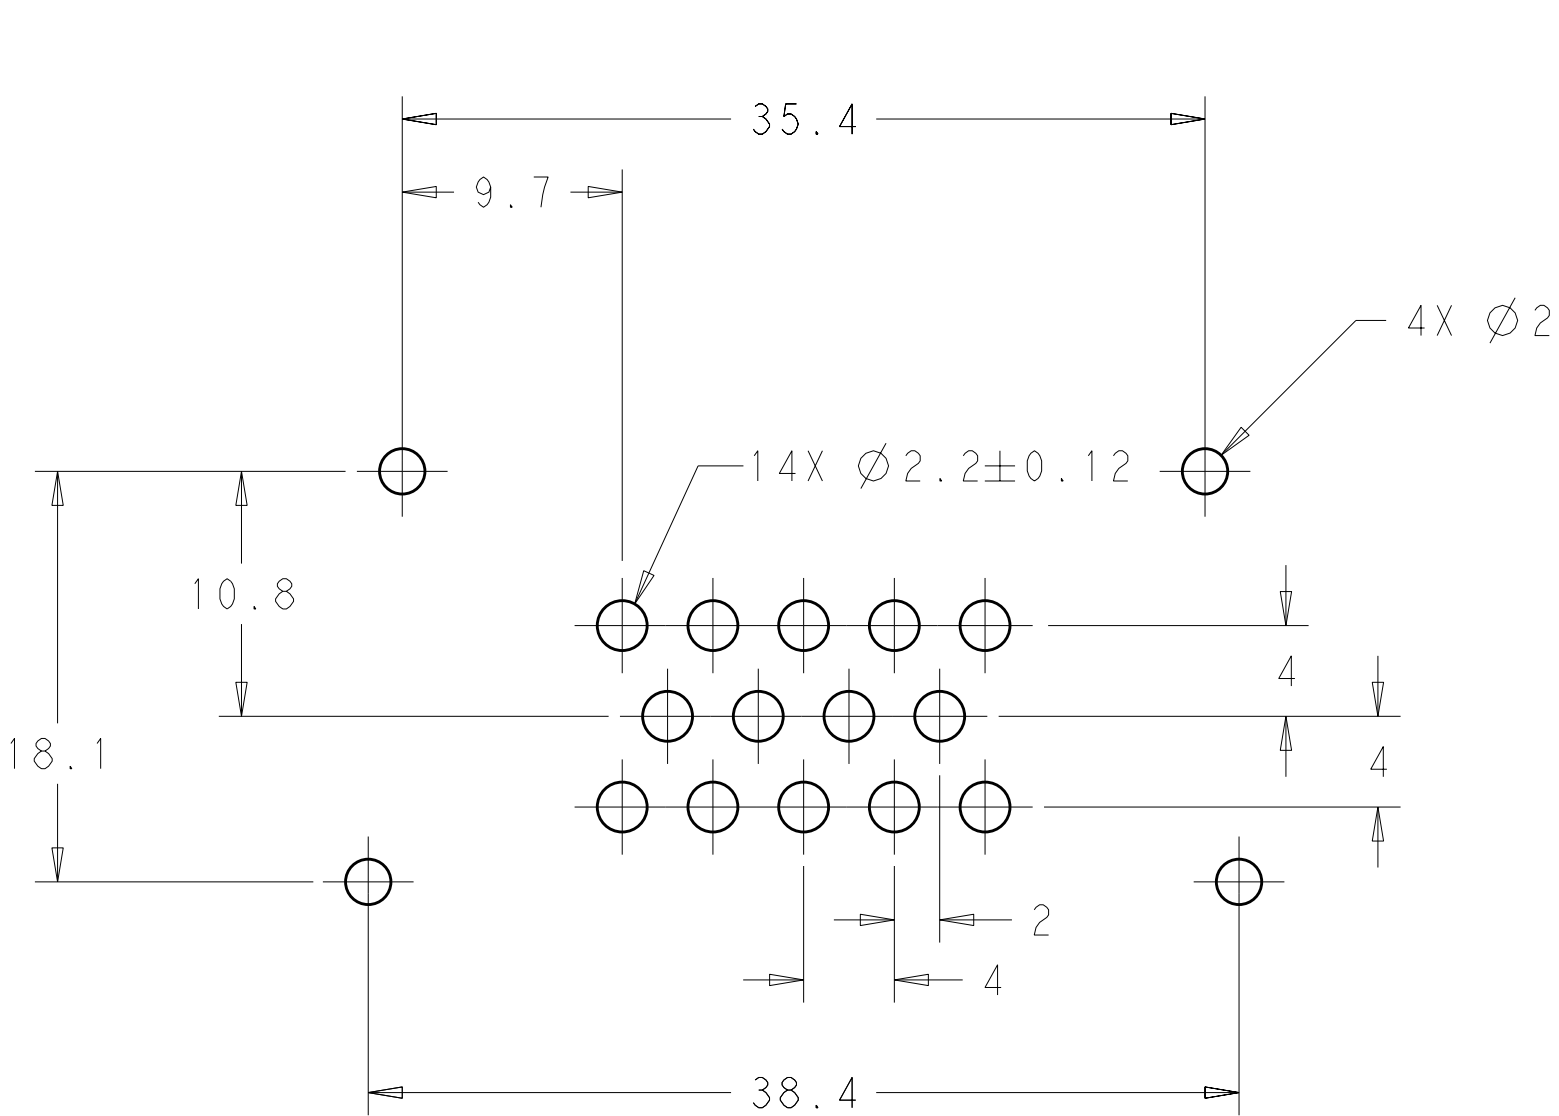


RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 THICK P.C. BOARD

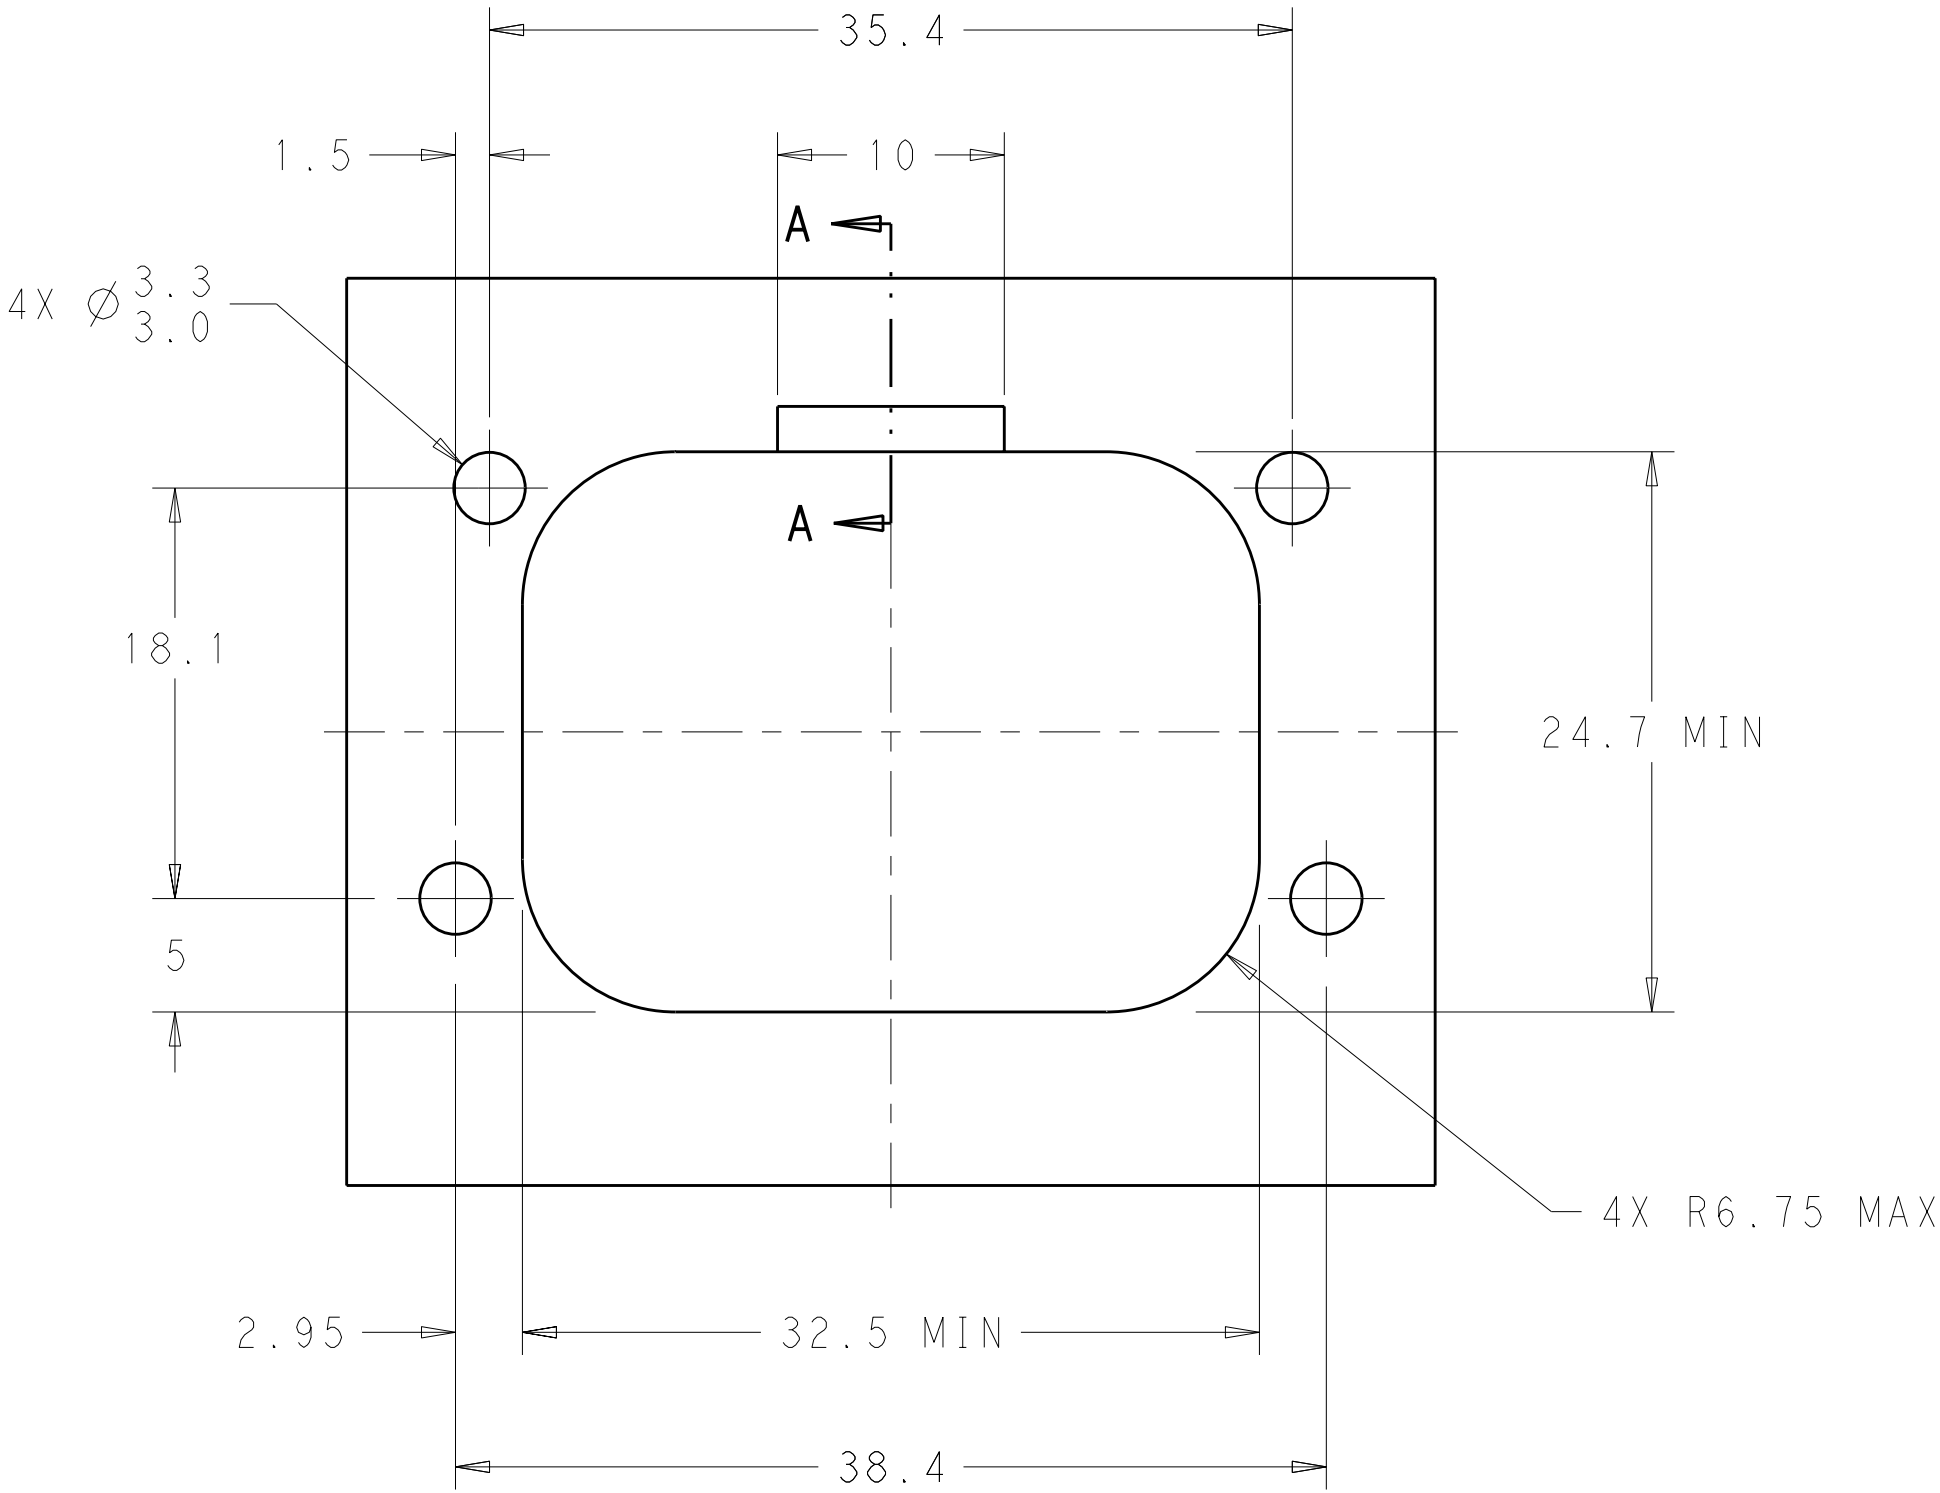

RECOMMENDED MOUNTING HOLE LAYOUT
FOR 5.0 MAX THICK PANEL

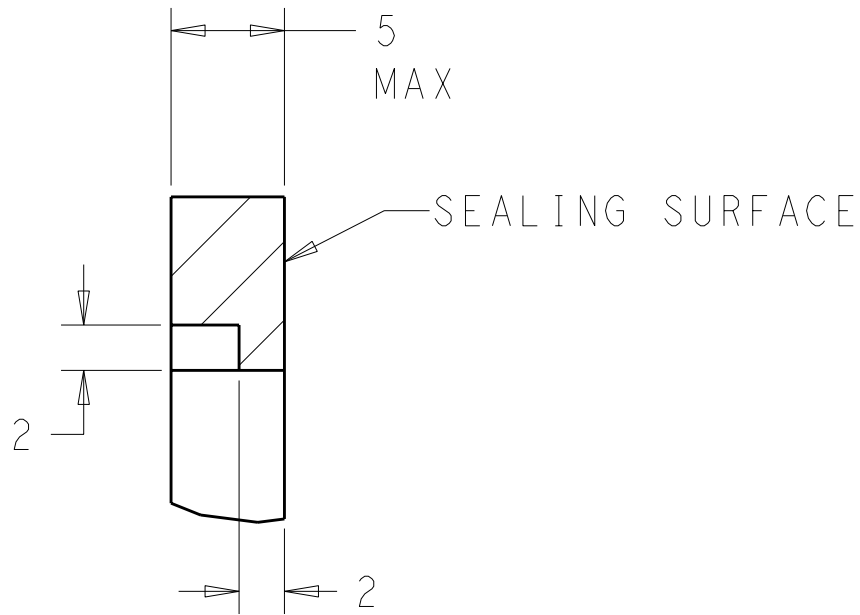

SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

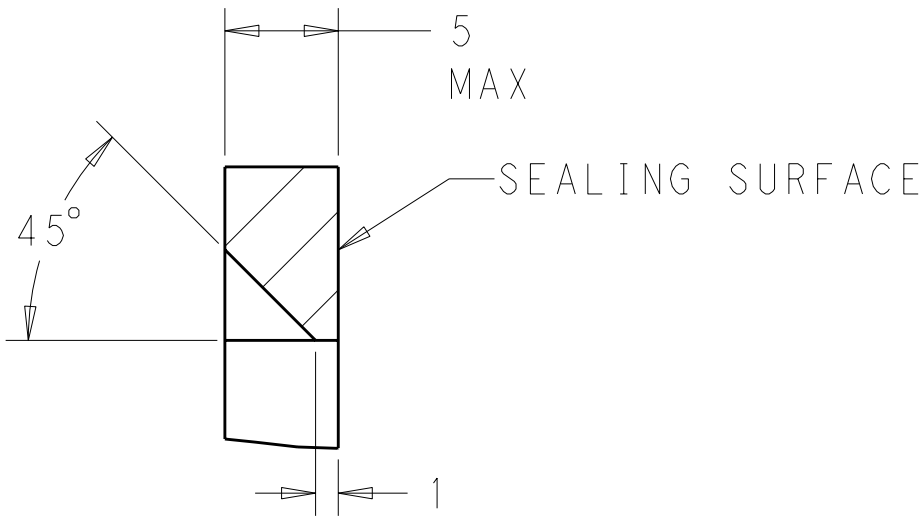

SECTION A-A
OPTIONAL CONSTRUCTION IF PANEL
THICKNESS IS GREATER THAN 2.0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. STRAUSSER	26APR2012	TE Connectivity	
		CHK D. STRAUSSER	26APR2012		
		APVD D. STRAUSSER	26APR2012	NAME	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
mm		9 PLC ±.2		108-1329	
		1 PLC ±0.13		APPLICATION SPEC	
		2 PLC ±.2		114-16016	
		3 PLC ±.2		WEIGHT	
		4 PLC ±.2		CUSTOMER DRAWING	
		ANGLES ±4°		SCALE 2:1	
MATERIAL		FINISH		SHEET 2 OF 2	
-		-		REV A1	