



SPECIFICATION

Item-No.: T60404-M4645-X030

K-No.: 24373

100A Current-Sensor-Module

For the electronic measurement of currents:
DC, AC, pulsed, mixed ..., with a galvanic
Isolation between the primary circuit
(high power) and the secondary circuit
(electronic circuit)

Date: 15.11.2019

Customer: Standard Type

Customers Part No.:

Page 1 of 2

Description

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design

Applications

- Mainly used for stationary operation in industrial applications:
- AC variable speed drives and servo motor drives
 - Static converters for DC motor drives
 - Battery supplied applications
 - Switched Mode Power Supplies (SMPS)
 - Power Supplies for welding applications
 - Uninterruptable Power Supplies (UPS)

Electrical Data - Ratings

I_{PN}	Primary rated current, r.m.s	100	A
R_M	Load resistance	0 ... 200	Ω
I_{SN}	Output rated current, r.m.s	100	mA
K_N	Turns ratio	1...4 : 1000	

Accuracy – Dynamic performance data (with DRV401 @ $V_C=5V \pm 5\%$)

		min.	typ.	max.	Unit
$I_{P,max}$	max. measuring range (@ $R_M = 1\Omega$)	± 130			A
X	Measuring accuracy @ I_{PN} , $T_A=25^\circ C$ (Module)	0.5			%
ε_L	Linearity	0.2			%
I_{OH}	Hysteresis	0.03	0.1		mA
t_r	Response time	9			μs
$\Delta t(I_{P,max})$	Delay time at $di/dt = 100 A/\mu s$	2.5			μs
f	Frequency range	DC...100			kHz

General Data

		min.	typ.	max.	Unit
T_A	Ambient operation temperature	-40		+85	$^\circ C$
T_s	Ambient storage temperature	-40		+85	$^\circ C$
m	Mass	31			g
R_s	Secondary coil resistance @ $T_A=85^\circ C$			29.5	Ω
R_p	Primary coil resistance per turn @ $T_A=25^\circ C$	0.25			$m\Omega$
C_k	Coupling capacity	10			pF
	Mechanical Stress according to M3209/3 Settings: 10 – 2000 Hz, 1 min/Octave, 2 hours	2			g

V_b	Rated insulation voltage, according to EN50178 reinforced insulation Insulation material group 1, Pollution degree 2 mains supply, rms	600	V
	non mains supply (peak od DC)	1100	V
S_{clear}	clearance (component without solder pad)	10	mm
S_{creep}	creepage (component without solder pad)	11	mm

Type Testing (Pin 1 - 4 to Pin 5 - 12)

Designed according standard EN 50178 with insulation material group 1

V_w	HV transient test acc. to M3064 (1,2 μs / 50 μs -wave form) 5 pulses -> pol. +, 5 pulses -> pol. -	8	kV
V_d	Testing voltage acc. to M3014, 60s	3.5	kV_{RMS}
V_e	Partial discharge voltage acc. to M3024	1240	V_{RMS}

Date	Name	Index	Change
15.11.19	NSch.	81	Data sheet reworked / updated (current status) and max. measuring range +/- 130 added. Minor change.
Hrs.: R&D-PD NPI D editor	Bearb.: DJ designer	MC-PM: NSch. check	freig.: SB released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

K-No.: 24373

100A Current-Sensor-Module

For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit
 (electronic circuit)

Date: 15.11.2019

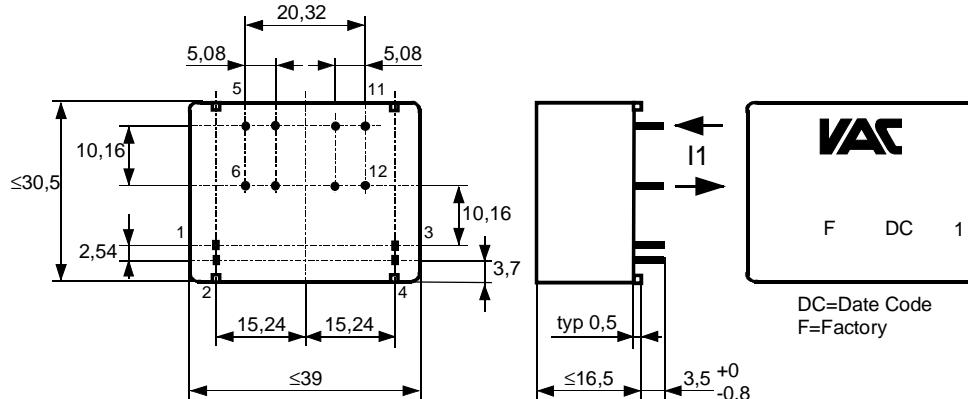
Customer: Standard Type

Customers Part No.:

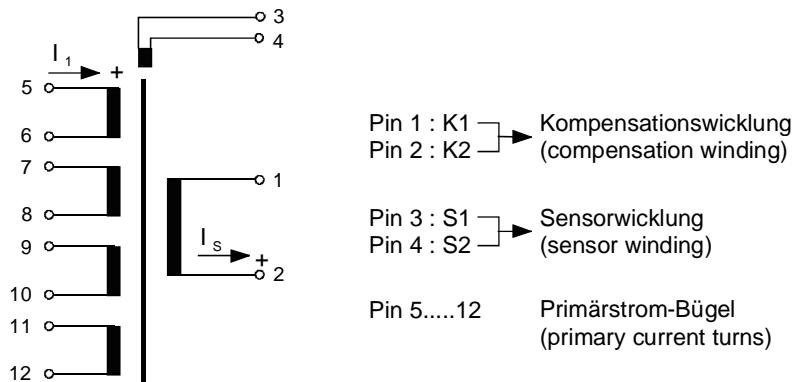
Page 2 of 2

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Toleranz der Stiftabstände $\pm 0,25\text{mm}$
Tolerances grid distanceZiffern 1 - 12 nicht aufgedruckt
Numbers 1 - 12 not imprinted
 Connections:
 No.: 1...4 = 0.88×0.6
 No.: 5...12 = Ø 1.9

Marking:

4645-X030
F DC 1DC=Date Code
F=Factory**Schematic diagram**Pin 1 : K1 → Kompensationswicklung
(compensation winding)Pin 3 : S1 → Sensorwicklung
(sensor winding)Pin 5....12 Primärstrom-Bügel
(primary current turns)**Routine Tests:** (Measurements after temperature balance of the samples at room temperature, SC=significant characteristic)

K_N (SC)	(V)	M3011/6c:	Turns ratio	4 : 1000 ± 0.5	%
I_0	(V)	M3226:	Offset current	< 0.1	mA
$\Delta\Phi$ (K1-K2)	(V)	M3090:	Magnetic Flux compensation core	17...19.5	nVs
$\Delta\Phi$ (S1-S2)	(V)	M3090:	Magnetic Flux sensor	20...35	nVs
R_s (K1-K2)	(V)	M3011/5:	Winding resistance compensation coil	20...35	Ω
R (S1-S2)	(V)	M3011/5:	Winding resistance magnetic probe coil	2.5...3.5	Ω
V_d	(V)	M3014:	Testing voltage, 1s Pin 1 - 4 to Pin 5 - 12	3.5	kV _{RMS}
V_e	(AQL1/S4)	M3024:	Partial discharge voltage	>1240	V

Other Information:

- Current direction: A positive output current appears at point I_s , by primary current in direction of the arrow.
- Constructed, manufactured and tested in accordance with EN 50178 and agrees with the standards.
- Housing and bobbin material: UL-listed. Flammability class UL 94V-0.

Hrsg.: R&D-PD NPI D
editorBearb.: DJ
designerMC-PM: NSch.
checkfreig.: SB
released